


NUT



RECOMMEND PANEL CUT OUT


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2023/01/10

SPECIFICATION:


- ELECTRICAL
 - Current Rating: 1.5A
 - Voltage Rating: 30V
 - Water Proof: IPX7
 - Operating Temperature: -40°C~+85°C

6	EPOXY BASE		
5	O-RING	EPDM ,BLACK	
4	NUT	BRASS, NICKEL PLATED	
3	SHELL	BRASS, NICKEL PLATED	
2	CONTACT	Brass, GOLD PLATED UNDER NICKEL	
1	HOUSING	PA66, UL94V-0, BLACK	
NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
m m			
WWW.ATTEND.COM.TW			
DRAWN	Tim	2023/01/10	 DRAWN NAME: M8 A-Code Receptacle,5Pin Female Solder Type Rear Fastened
CHECKED	Fros	2023/01/10	
APPROVED	Ken	2023/01/10	
	SCALE 2/1	SHEET 1/1	SIZE A4
FILE NAME		219A-05FAR_B_1	


1. Wire Processing

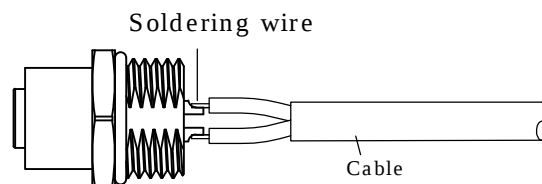

2. Installation Direction

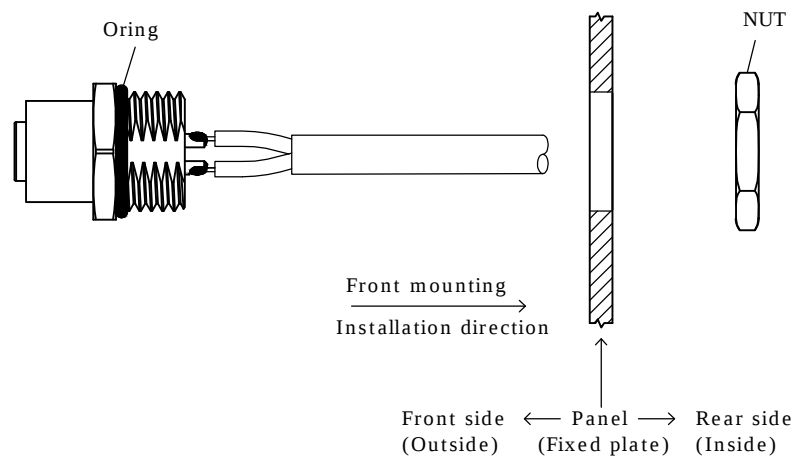

3. Connector Mated to Panel Mount

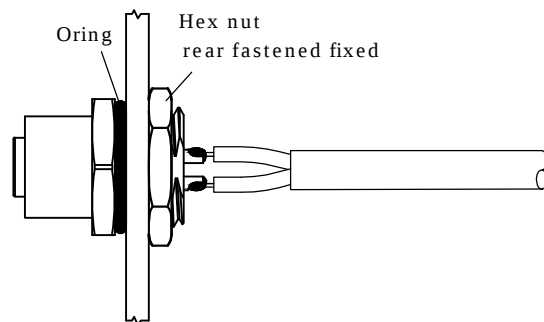

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME: M Series For Female Solder Type Rear Fastened Design Guide		
CHECKED	Fros	2025/02/25			
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FAR_DG