


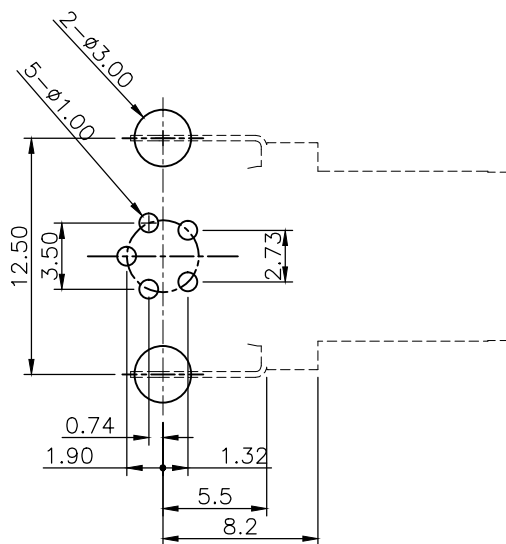
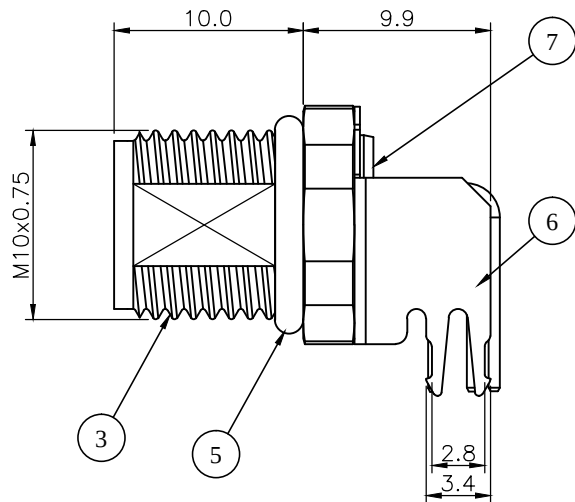
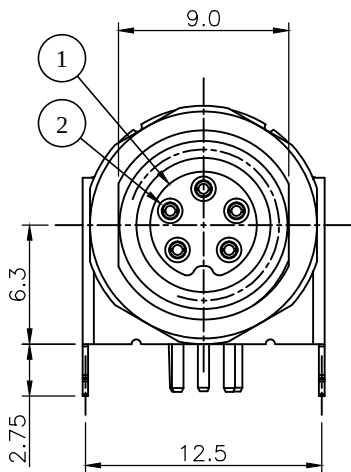


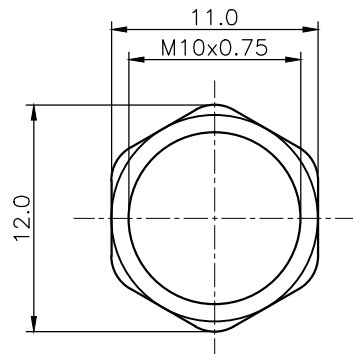

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.1\text{mm}$



HEX-NUT



PANEL CUT-OUT

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/03/12

SPECIFICATION:

- CURRENT RATING: 1.5A
- VOLTAGE: 30VAC/DC
- WATER PROOF: IP67
- OPERATION TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$

7	EPOXY BASE				
6	GROUND	PHOSPHOR BRONZE, TIN PLATED			
5	O-RING	NBR, BLACK			
4	NUT	BRASS, NICKEL PLATED			
3	SHELL	BRASS, NICKEL PLATED			
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL			
1	HOUSING	PA66, UL94V-0, BLACK			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND			
UNIT:	DECIMAL		LINEAR	ANGLES	
	X.		±0.50	±5°	
	X.X		±0.25	±3°	
	X.XX		±0.15	±1°	
m m		www.attend.com.tw			
DRAWN	Tim	2025/03/12	DRAWN NAME: M8 A-Code Receptacle, 5Pin Female R/A DIP Type, Front Fastened, Shield		
CHECKED	Fros	2025/03/12			
APPROVED	Ken	2025/03/12			
		PRODUCT NO.	219A-05FRF		
	SCALE 2.5	SHEET 1/1	SIZE A4	FILE NAME	219A-05FRF_B_1