



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2019/12/27

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 1.5A
 - 1.2 Voltage Rating: 30V
 - 1.3 Water Proof: IP67
 - 1.4 Operating Temperature: -40°C~+105°C

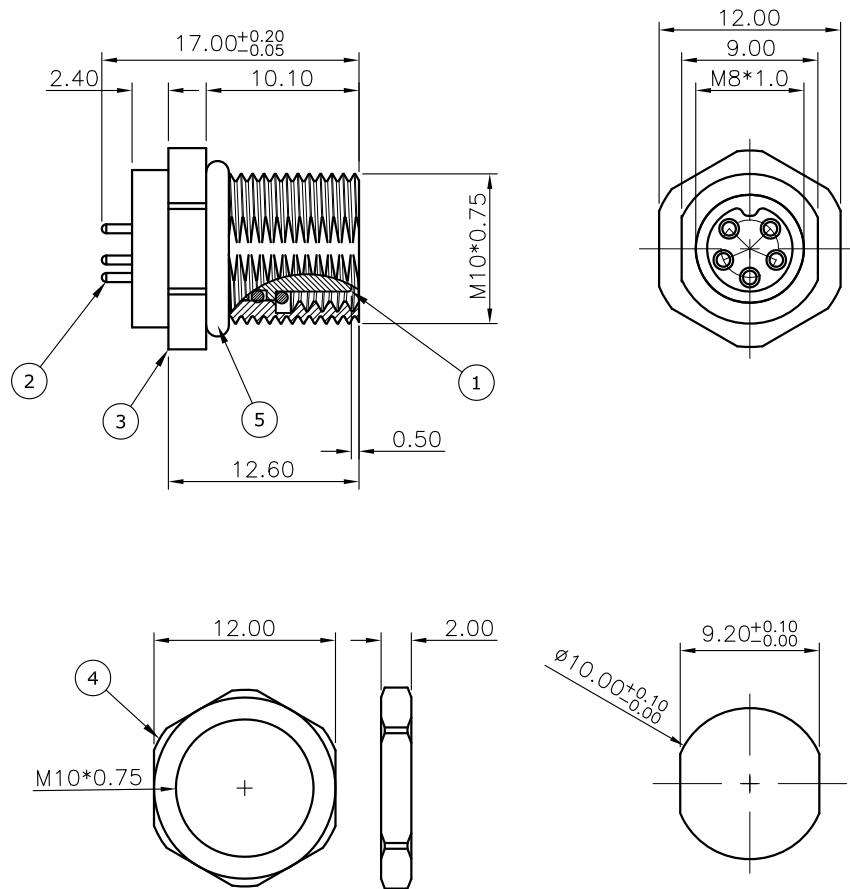


RECOMMEND LAYOUT


RECOMMEND PANEL CUT OUT

6	EPOXY BASE				
5	O-RING	EPDM, black			
4	NUT	Brass, nickel plating			
3	SHELL	Brass, nickel plating			
2	CONTACT	Brass, gold flash plating under nickel			
1	HOUSING	PA66, black			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND			
UNIT: mm	DECIMAL		LINEAR	ANGLES	
	X.		±0.50	±5°	
	X.X		±0.25	±3°	
	X.XX		±0.12	±1°	
		WWW.ATTEND.COM.TW			
DRAWN	Fros	2019/12/27	DRAWN NAME: M8 A-Code Receptacle, 5Pin Female Straight PCB Type Front Fastened		
CHECKED	Tim	2019/12/27			
APPROVED	Ken	2019/12/27			
	SCALE 2/1	SHEET 1/1	SIZE A4	PRODUCT NO.	219A-05FSF
				FILE NAME	219A-05FSF_B_1


1. Soldering Board



2. Installation Direction

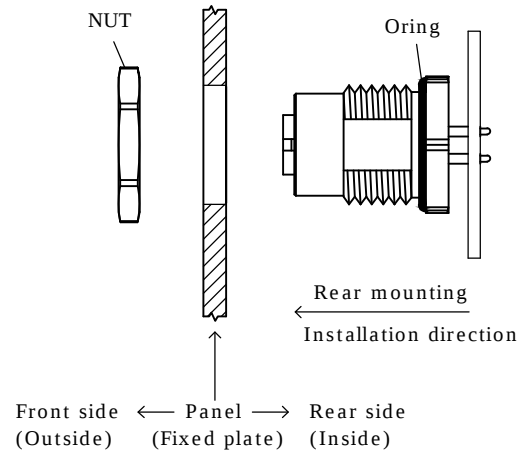

3. Connector Mated to Panel Mount

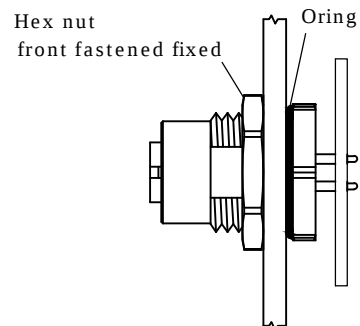

UNLESS OTHERWISE SPECIFIED TOLERANCE						
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME:			
CHECKED	Fros	2025/02/25	M Series For Female DIP Type Front Fastened Design Guide			
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME		M Series FSF_DG