
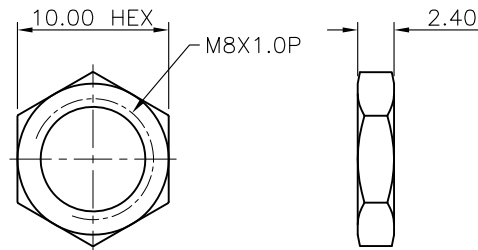
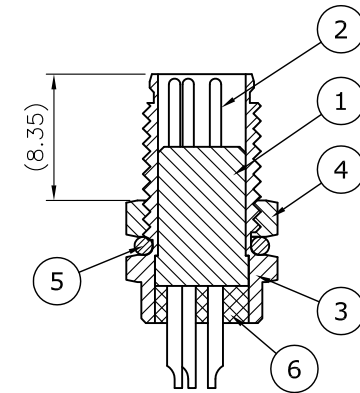



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2018/11/02
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 1.5A
2. VOLTAGE: 30VAC/DC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

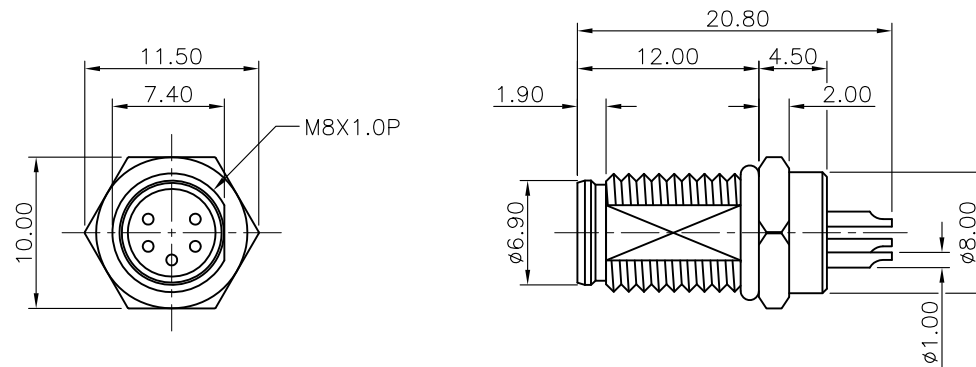

NUT



RECOMMEND PANEL CUT OUT

6	EPOXY BASE			
5	O-RING	NBR, BLACK		
4	NUT	BRASS, NICKEL PLATED		
3	SHELL	BRASS, NICKEL PLATED		
2	CONTACT	BRASS, GOLD PLATED UNDER NICKEL		
1	HOUSING	PBT, BLACK		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND		
UNIT:	DECIMAL		LINEAR	ANGLES
mm	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.12	±1°
		WWW.ATTEND.COM.TW		
DRAWN	Tim	2018/11/02	DRAWN NAME:	
CHECKED	Fros	2018/11/02	M8 A-Code Receptacle, 5Pin Male Solder Type Front Fastened, With Edge Cut	
APPROVED	Ken	2018/11/02	PRODUCT NO.	219A-05MAF-01
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 219A-05MAF-01_B_2




WWW.ATTEND.COM.TW


DRAWN NAME:
M8 A-Code Receptacle, 5Pin Male Solder Type
Front Fastened, With Edge Cut

PRODUCT NO. 219A-05MAF-01


1. Wire Processing

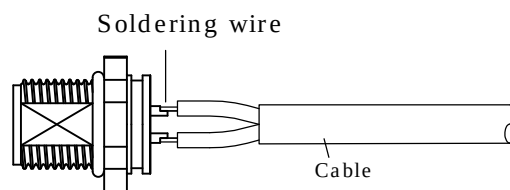

2. Installation Direction

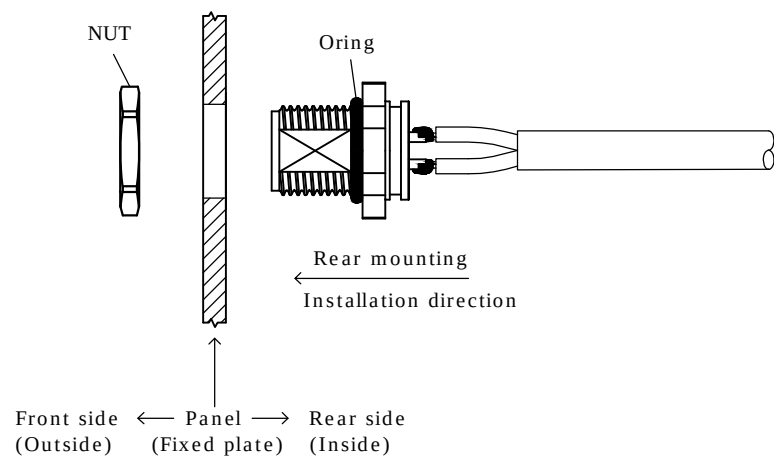

3. Connector Mated to Panel Mount

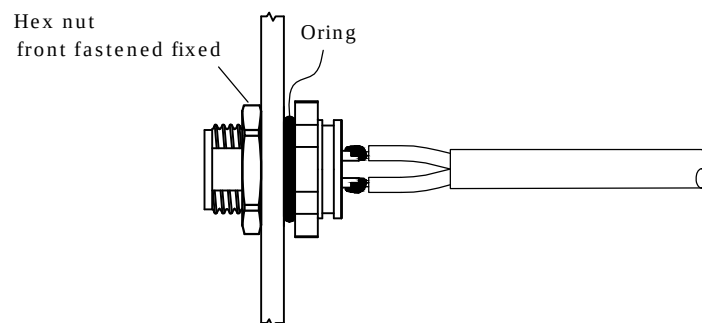

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Male Solder Type Front Fastener Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MAF_DG