
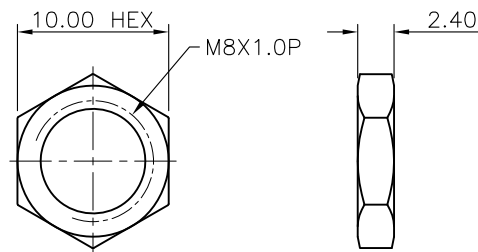
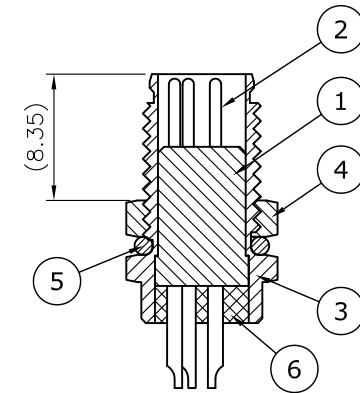



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2017/05/03
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 1.5A
2. VOLTAGE: 30VAC/DC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

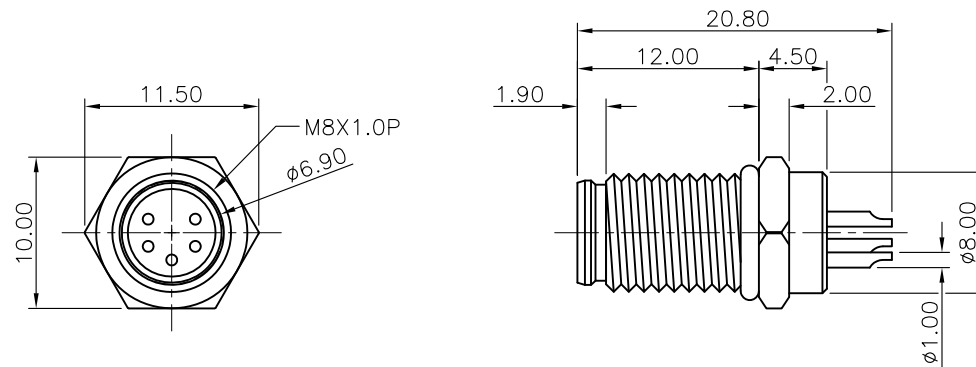

NUT




RECOMMEND PANEL CUT OUT

6	EPOXY BASE				
5	O-RING	NBR, Black			
4	NUT	Brass, NICKEL PLATED			
3	SHELL	Brass, NICKEL PLATED			
2	CONTACT	Brass, 10u" GOLD PLATED UNDER NICKEL			
1	HOUSING	PBT, Black			
NO. PART NAME DESCRIPTION					
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
			 ATTEND		
			WWW.ATTEND.COM.TW		
DRAWN	Tim	2017/05/03	DRAWN NAME: M8 A-Count Receptacle, 5Pin Male Solder Type Front Fastened		
CHECKED	Fros	2017/05/03			
APPROVED	Ken	2017/05/03			
	SCALE	SHEET	SIZE	PRODUCT NO.	219A-05MAF
	2/1	1/1	A4	FILE NAME	219A-05MAF_B_2




WWW.ATTEND.COM.TW
DRAWN NAME:
M8 A-Code Receptacle,
5Pin Male Solder Type Front Fastened


1. Wire Processing

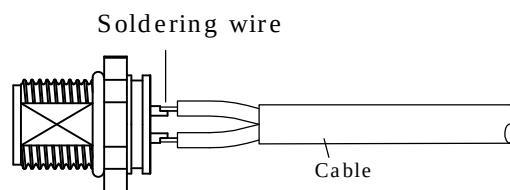

2. Installation Direction

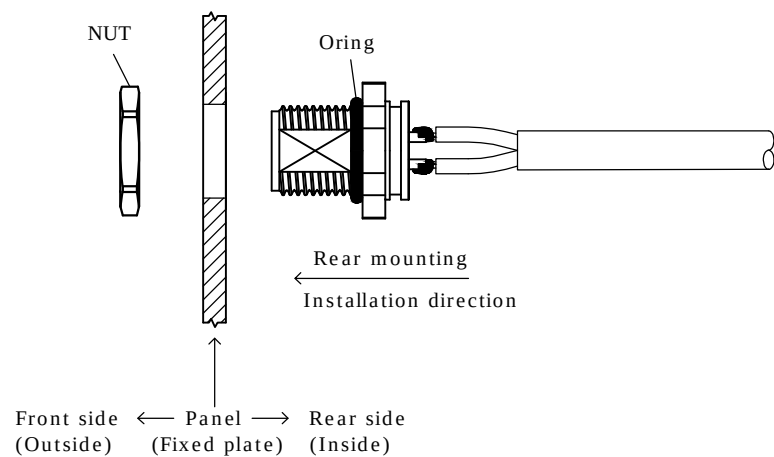

3. Connector Mated to Panel Mount

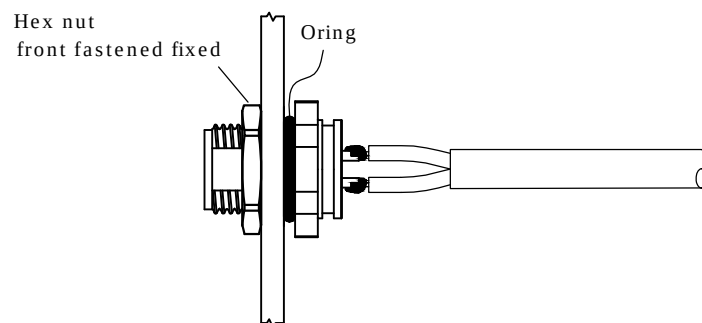

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Male Solder Type Front Fastener Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MAF_DG