
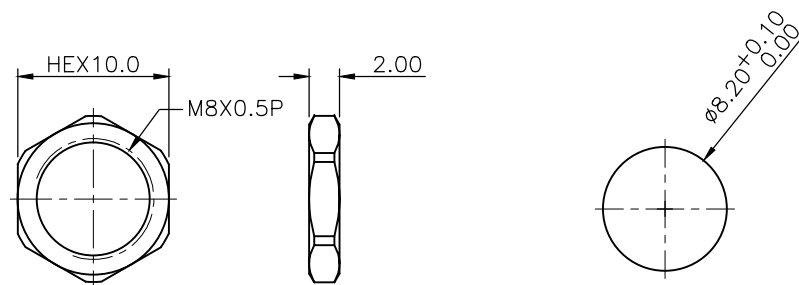
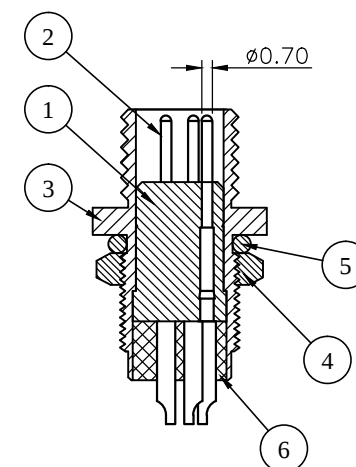


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/03/13

SPECIFICATION:

- CURRENT RATING: 1.5A
- VOLTAGE: 30VAC/DC
- WATER PROOF: IP67
- OPERATION TEMPERATURE: -40°C TO +85°C

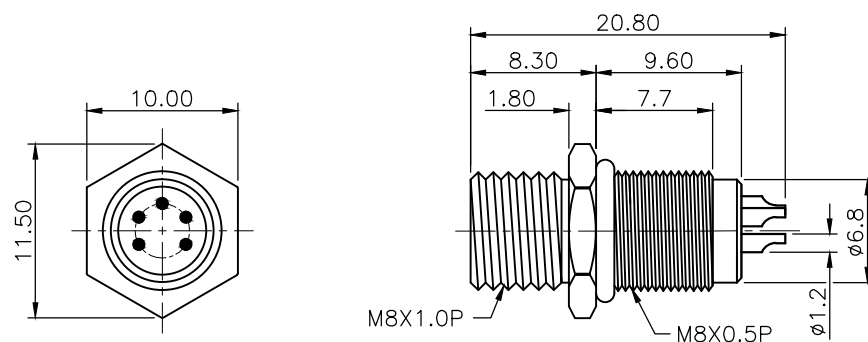

NUT

RECOMMEND PANEL CUT OUT

6	EPOXY BASE		
5	O-RING	NBR, BLACK	
4	NUT	BRASS, NICKEL PLATED	
3	SHELL	BRASS, NICKEL PLATED	
2	CONTACT	Brass, GOLD PLATED UNDER NICKEL	
1	HOUSING	PBT, UL94V-0, BLACK	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
mm			
WWW.ATTEND.COM.TW			
DRAWN		Tim	2025/03/13
CHECKED		Fros	2025/03/13
APPROVED		Ken	2025/03/13
SCALE		SHEET	SIZE
2/1		1/1	A4
FILE NAME		219A-05MAR_B_1	
DRAWN NAME: M8 A-Code Receptacle, 5Pin Male Solder Type Rear Fastener			
PRODUCT NO.		219A-05MAR	

