
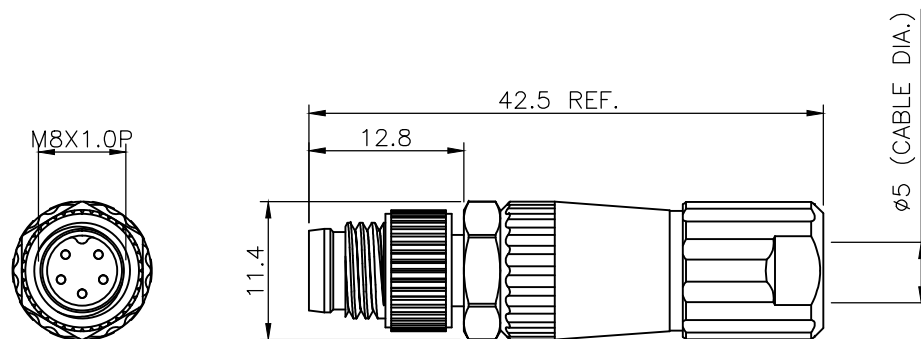


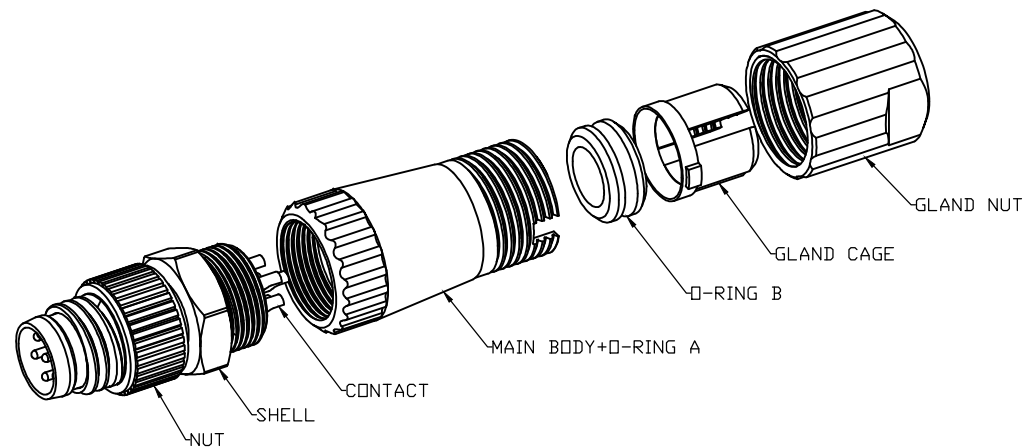

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2023/04/19

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 1.5A
 - 1.2 Voltage Rating: 30V
 - 1.3 Water Proof: IPX7
 - 1.4 Operating Temperature: -40°C~+85°C

9	GLAND NUT	PA66, UL94V-0, Black
8	GLAND CAGE	PA66, UL94V-0, White
7	O-RING B	NBR, Black
6	O-RING A	Silicone, Black
5	MAIN BODY	PA66, UL94V-0, Black
4	CONTACT	Brass, Gold flash over Nickel
3	SHELL	Brass, Nickel plating
2	NUT	Brass, Nickel plating
1	HOUSING	PA66, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



www.attend.com.tw

DRAWN	Tim	2023/04/19	DRAWN NAME:
CHECKED	Fros	2023/04/19	M8 A- Code Plug for Cable, 5 Pin Male For Field Installable
APPROVED	Ken	2023/04/19	PRODUCT NO. 219A-05MF0
SCALE	N/A	SHEET 1/1	SIZE A4
FILE NAME	219A-05MF0_B_1		

