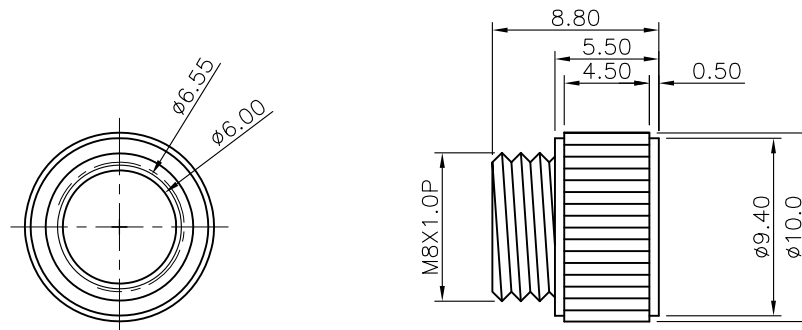
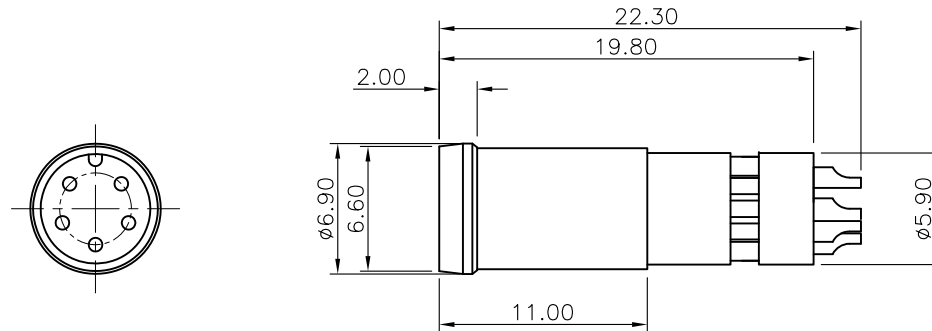


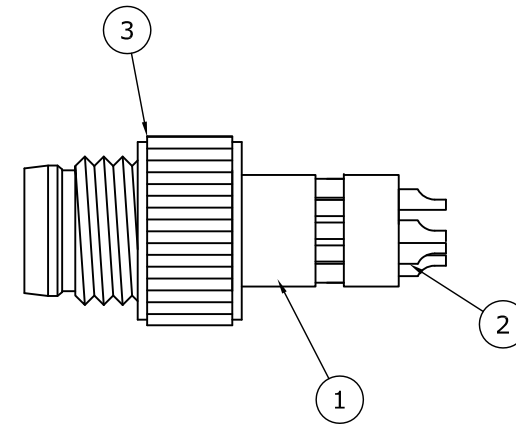
REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2018/11/05
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 1.5A
2. VOLTAGE: 30VAC/DC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C



NUT

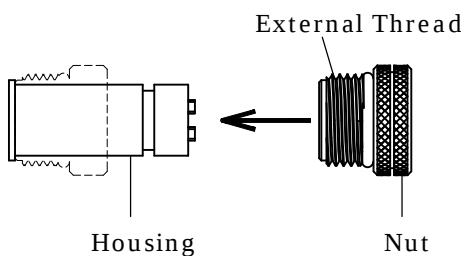
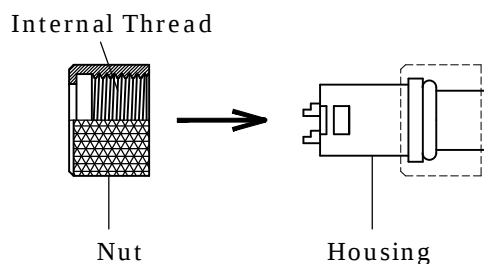
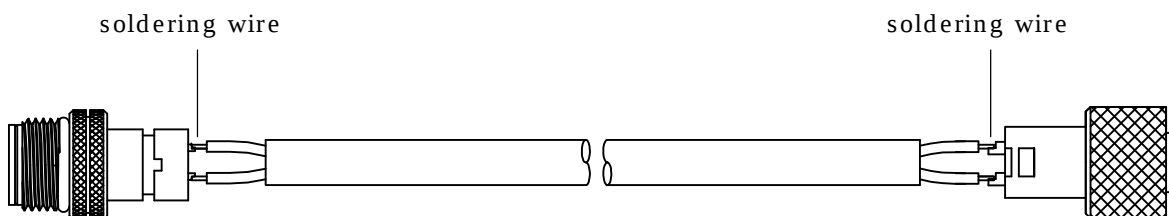
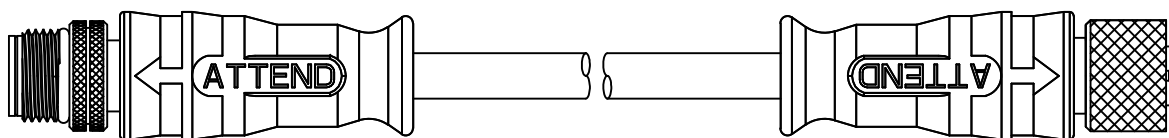


3	NUT	Brass, Nickel plating
2	CONTACT	Brass, Gold Flash over Nickel
1	HOUSING	PA66, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN	Angel	2018/11/05	DRAWN NAME:
CHECKED	Tim	2018/11/05	M8 A-Code Plug for Cable
APPROVED	Ken	2018/11/05	5Pin Male For Overmold with Cable
SCALE	2.5/1	SHEET	1/1
SIZE	A4	FILE NAME	219A-05MO0-01_B_2



WWW.ATTEND.COM.TW

							REV.	DESCRIPTION		DRAWN	DATE																																																																																							
1. Setting Connector																																																																																																		
																																																																																																		
Male Connector						Female Connector																																																																																												
2. Wire Processing																																																																																																		
																																																																																																		
3. Overmolded Cable Assemblies																																																																																																		
																																																																																																		
<table><tr><td colspan="8">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="4" rowspan="5"></td></tr><tr><td colspan="2">UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td colspan="4">ANGLES</td></tr><tr><td rowspan="3">m m</td><td>X.</td><td>±0.50</td><td colspan="4">±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td colspan="4">±3°</td></tr><tr><td>X.XX</td><td>±0.12</td><td colspan="4">±1°</td></tr><tr><td colspan="2">DRAWN</td><td colspan="2">Tim</td><td colspan="2">2025/02/25</td><td colspan="6">DRAWN NAME:</td></tr><tr><td colspan="2">CHECKED</td><td colspan="2">Fros</td><td colspan="2">2025/02/25</td><td colspan="6">M Series For Male Cable Overmold Type</td></tr><tr><td colspan="2">APPROVED</td><td colspan="2">Ken</td><td colspan="2">2025/02/25</td><td colspan="6">Design Guide</td></tr><tr><td colspan="2">SCALE</td><td colspan="2">SHEET 1/1</td><td colspan="2">SIZE A4</td><td colspan="2">FILE NAME</td><td colspan="4">M Series MO0_DG</td></tr></table>												UNLESS OTHERWISE SPECIFIED TOLERANCE												UNIT:		DECIMAL	LINEAR	ANGLES				m m	X.	±0.50	±5°				X.X	±0.25	±3°				X.XX	±0.12	±1°				DRAWN		Tim		2025/02/25		DRAWN NAME:						CHECKED		Fros		2025/02/25		M Series For Male Cable Overmold Type						APPROVED		Ken		2025/02/25		Design Guide						SCALE		SHEET 1/1		SIZE A4		FILE NAME		M Series MO0_DG			
UNLESS OTHERWISE SPECIFIED TOLERANCE																																																																																																		
UNIT:		DECIMAL	LINEAR	ANGLES																																																																																														
m m	X.	±0.50	±5°																																																																																															
	X.X	±0.25	±3°																																																																																															
	X.XX	±0.12	±1°																																																																																															
DRAWN		Tim		2025/02/25		DRAWN NAME:																																																																																												
CHECKED		Fros		2025/02/25		M Series For Male Cable Overmold Type																																																																																												
APPROVED		Ken		2025/02/25		Design Guide																																																																																												
SCALE		SHEET 1/1		SIZE A4		FILE NAME		M Series MO0_DG																																																																																										