

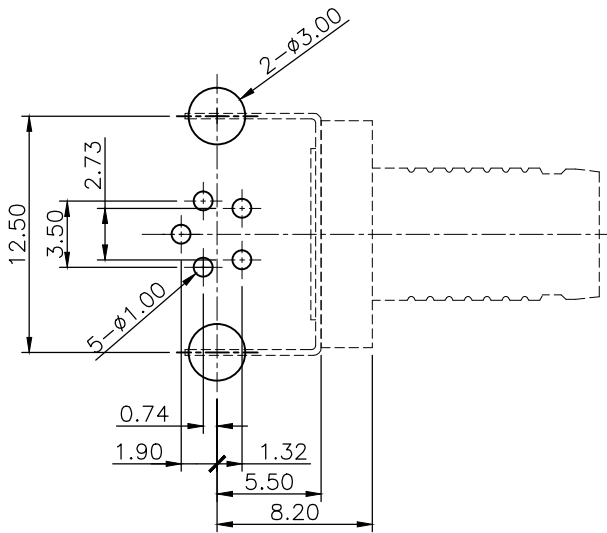
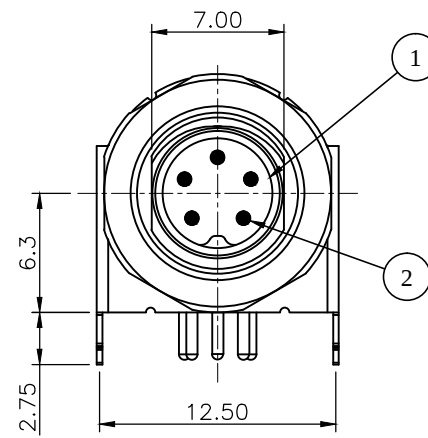



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/04/08

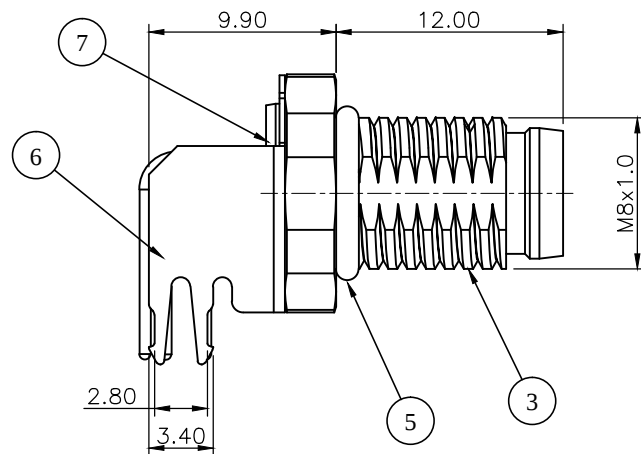

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.1\text{mm}$

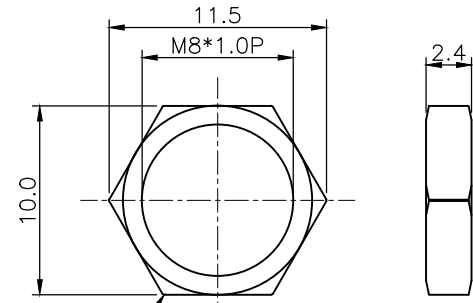

4 HEX-NUT



PANEL CUT-OUT

SPECIFICATION:

1. CURRENT RATING: 1.5A
2. VOLTAGE: 30VAC/DC
3. WATER PROOF: IP67
4. OPERATION TEMPERATURE: -40°C TO +85°C

7	EPOXY BASE			
6	GROUND	PHOSPHOR BRONZE, TIN PLATED		
5	O-RING	NBR ,BLACK		
4	NUT	BRASS, NICKEL PLATED		
3	SHELL	BRASS, NICKEL PLATED		
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL		
1	HOUSING	PA, UL94V-0, BLACK		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND		
UNIT:	DECIMAL		LINEAR	ANGLES
	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.12	±1°
m m		www.attend.com.tw		
DRAWN	Tim	2025/04/08	DRAWN NAME: M8 A- Code Receptacle 5Pin Male DIP R/A Front Fastened, Shield	
CHECKED	Fros	2025/04/08		
APPROVED	Ken	2025/04/08		
	SCALE	SHEET		SIZE
	2.5	1/1		A4
		FILE NAME	219A-05MRF_B_1	



www.attend.com.tw