
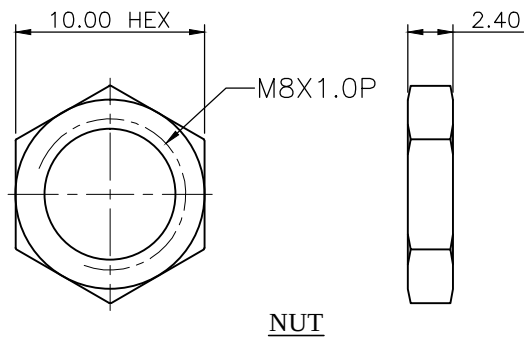
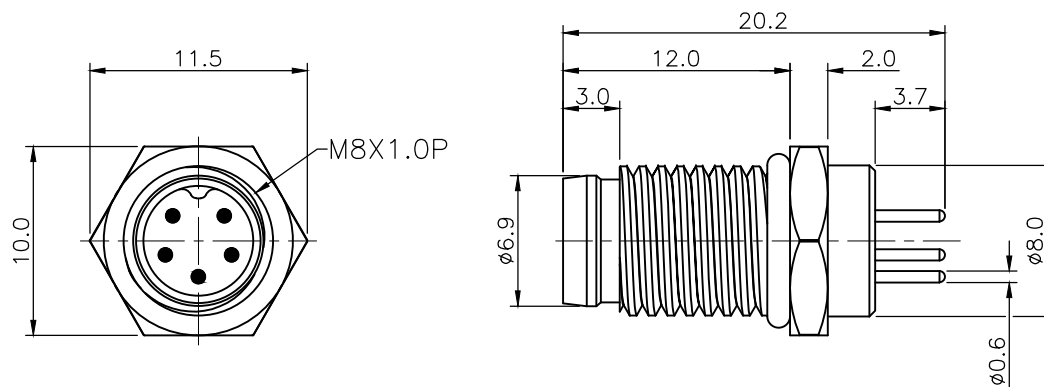


RECOMMEND PANEL CUT OUT




RECOMMEND PCB LAYOUT

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/04/07

SPECIFICATION:

- CURRENT RATING: 1.5A
- VOLTAGE: 30VAC/DC
- WATER PROOF: IP67
- OPERATION TEMPERATURE: -40°C TO +85°C

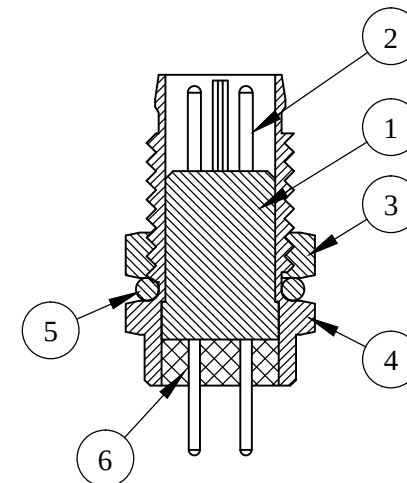

6	EPOXY BASE	
5	O-RING	NBR, BLACK
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS, GOLD PLATED UNDER NICKEL
1	HOUSING	PA, BLACK
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES				
	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
m m					WWW.ATTEND.COM.TW		
DRAWN		Tim		2025/04/07		DRAWN NAME:	
CHECKED		Fros		2025/04/07		M8 A-Code Receptacle, 5Pin	
APPROVED		Ken		2025/04/07		Male Straight PCB Type, Front Fastened	
		SCALE	SHEET	SIZE	PRODUCT NO.		
		2.5/1	1/1	A4	219A-05MSF		
					FILE NAME		219A-05MSF_B_1