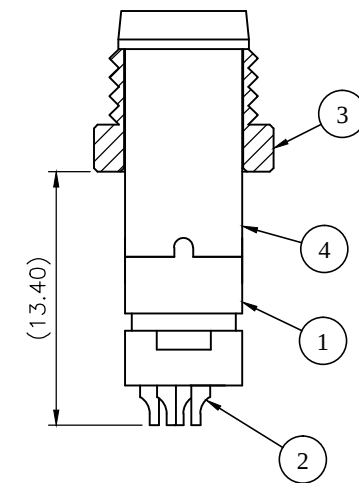


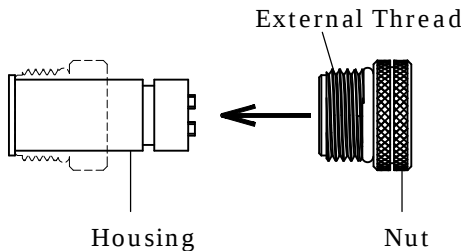
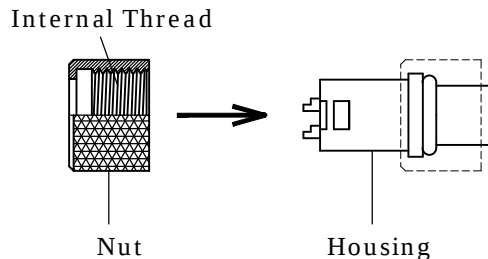
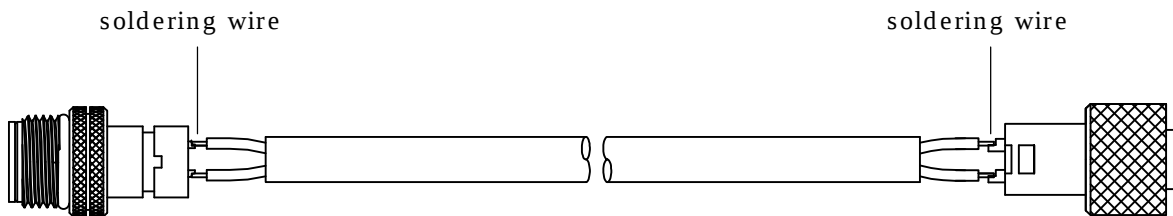
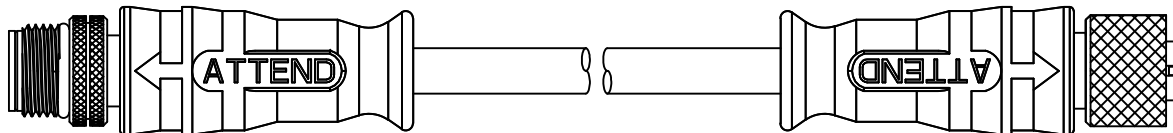
NUT

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage Rating: 30VAC/DC
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C



4	SHELL	Brass, Nickel plating	
3	NUT	Brass, Nickel plating	
2	CONTACT	Brass, Gold plating over Nickel	
1	HOUSING	PBT, UL94V-0, Black	
NO	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
m m			
WWW.ATTEND.COM.TW			
DRAWN	Tim	2024/06/07	DRAWN NAME: M8 A- Code Plug for Cable 6Pin Male for overmold with Cable
CHECKED	Fros	2024/06/07	
APPROVED	Ken	2024/06/07	
PRODUCT NO.			219A-06MO0
FILE NAME			219A-06MO0_B_1

							REV.	DESCRIPTION		DRAWN	DATE																																																																																							
1. Setting Connector																																																																																																		
																																																																																																		
Male Connector						Female Connector																																																																																												
2. Wire Processing																																																																																																		
																																																																																																		
3. Overmolded Cable Assemblies																																																																																																		
																																																																																																		
<table><tr><td colspan="8">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="4" rowspan="5"></td></tr><tr><td colspan="2">UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td colspan="4">ANGLES</td></tr><tr><td rowspan="3">m m</td><td>X.</td><td>±0.50</td><td colspan="4">±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td colspan="4">±3°</td></tr><tr><td>X.XX</td><td>±0.12</td><td colspan="4">±1°</td></tr><tr><td colspan="2">DRAWN</td><td colspan="2">Tim</td><td colspan="2">2025/02/25</td><td colspan="6">DRAWN NAME:</td></tr><tr><td colspan="2">CHECKED</td><td colspan="2">Fros</td><td colspan="2">2025/02/25</td><td colspan="6">M Series For Male Cable Overmold Type Design Guide</td></tr><tr><td colspan="2">APPROVED</td><td colspan="2">Ken</td><td colspan="2">2025/02/25</td><td colspan="6">PRODUCT NO.</td></tr><tr><td colspan="2"></td><td>SCALE</td><td>SHEET 1/1</td><td>SIZE A4</td><td colspan="2">FILE NAME</td><td colspan="5">M Series MO0_DG</td></tr></table>												UNLESS OTHERWISE SPECIFIED TOLERANCE												UNIT:		DECIMAL	LINEAR	ANGLES				m m	X.	±0.50	±5°				X.X	±0.25	±3°				X.XX	±0.12	±1°				DRAWN		Tim		2025/02/25		DRAWN NAME:						CHECKED		Fros		2025/02/25		M Series For Male Cable Overmold Type Design Guide						APPROVED		Ken		2025/02/25		PRODUCT NO.								SCALE	SHEET 1/1	SIZE A4	FILE NAME		M Series MO0_DG				
UNLESS OTHERWISE SPECIFIED TOLERANCE																																																																																																		
UNIT:		DECIMAL	LINEAR	ANGLES																																																																																														
m m	X.	±0.50	±5°																																																																																															
	X.X	±0.25	±3°																																																																																															
	X.XX	±0.12	±1°																																																																																															
DRAWN		Tim		2025/02/25		DRAWN NAME:																																																																																												
CHECKED		Fros		2025/02/25		M Series For Male Cable Overmold Type Design Guide																																																																																												
APPROVED		Ken		2025/02/25		PRODUCT NO.																																																																																												
		SCALE	SHEET 1/1	SIZE A4	FILE NAME		M Series MO0_DG																																																																																											