


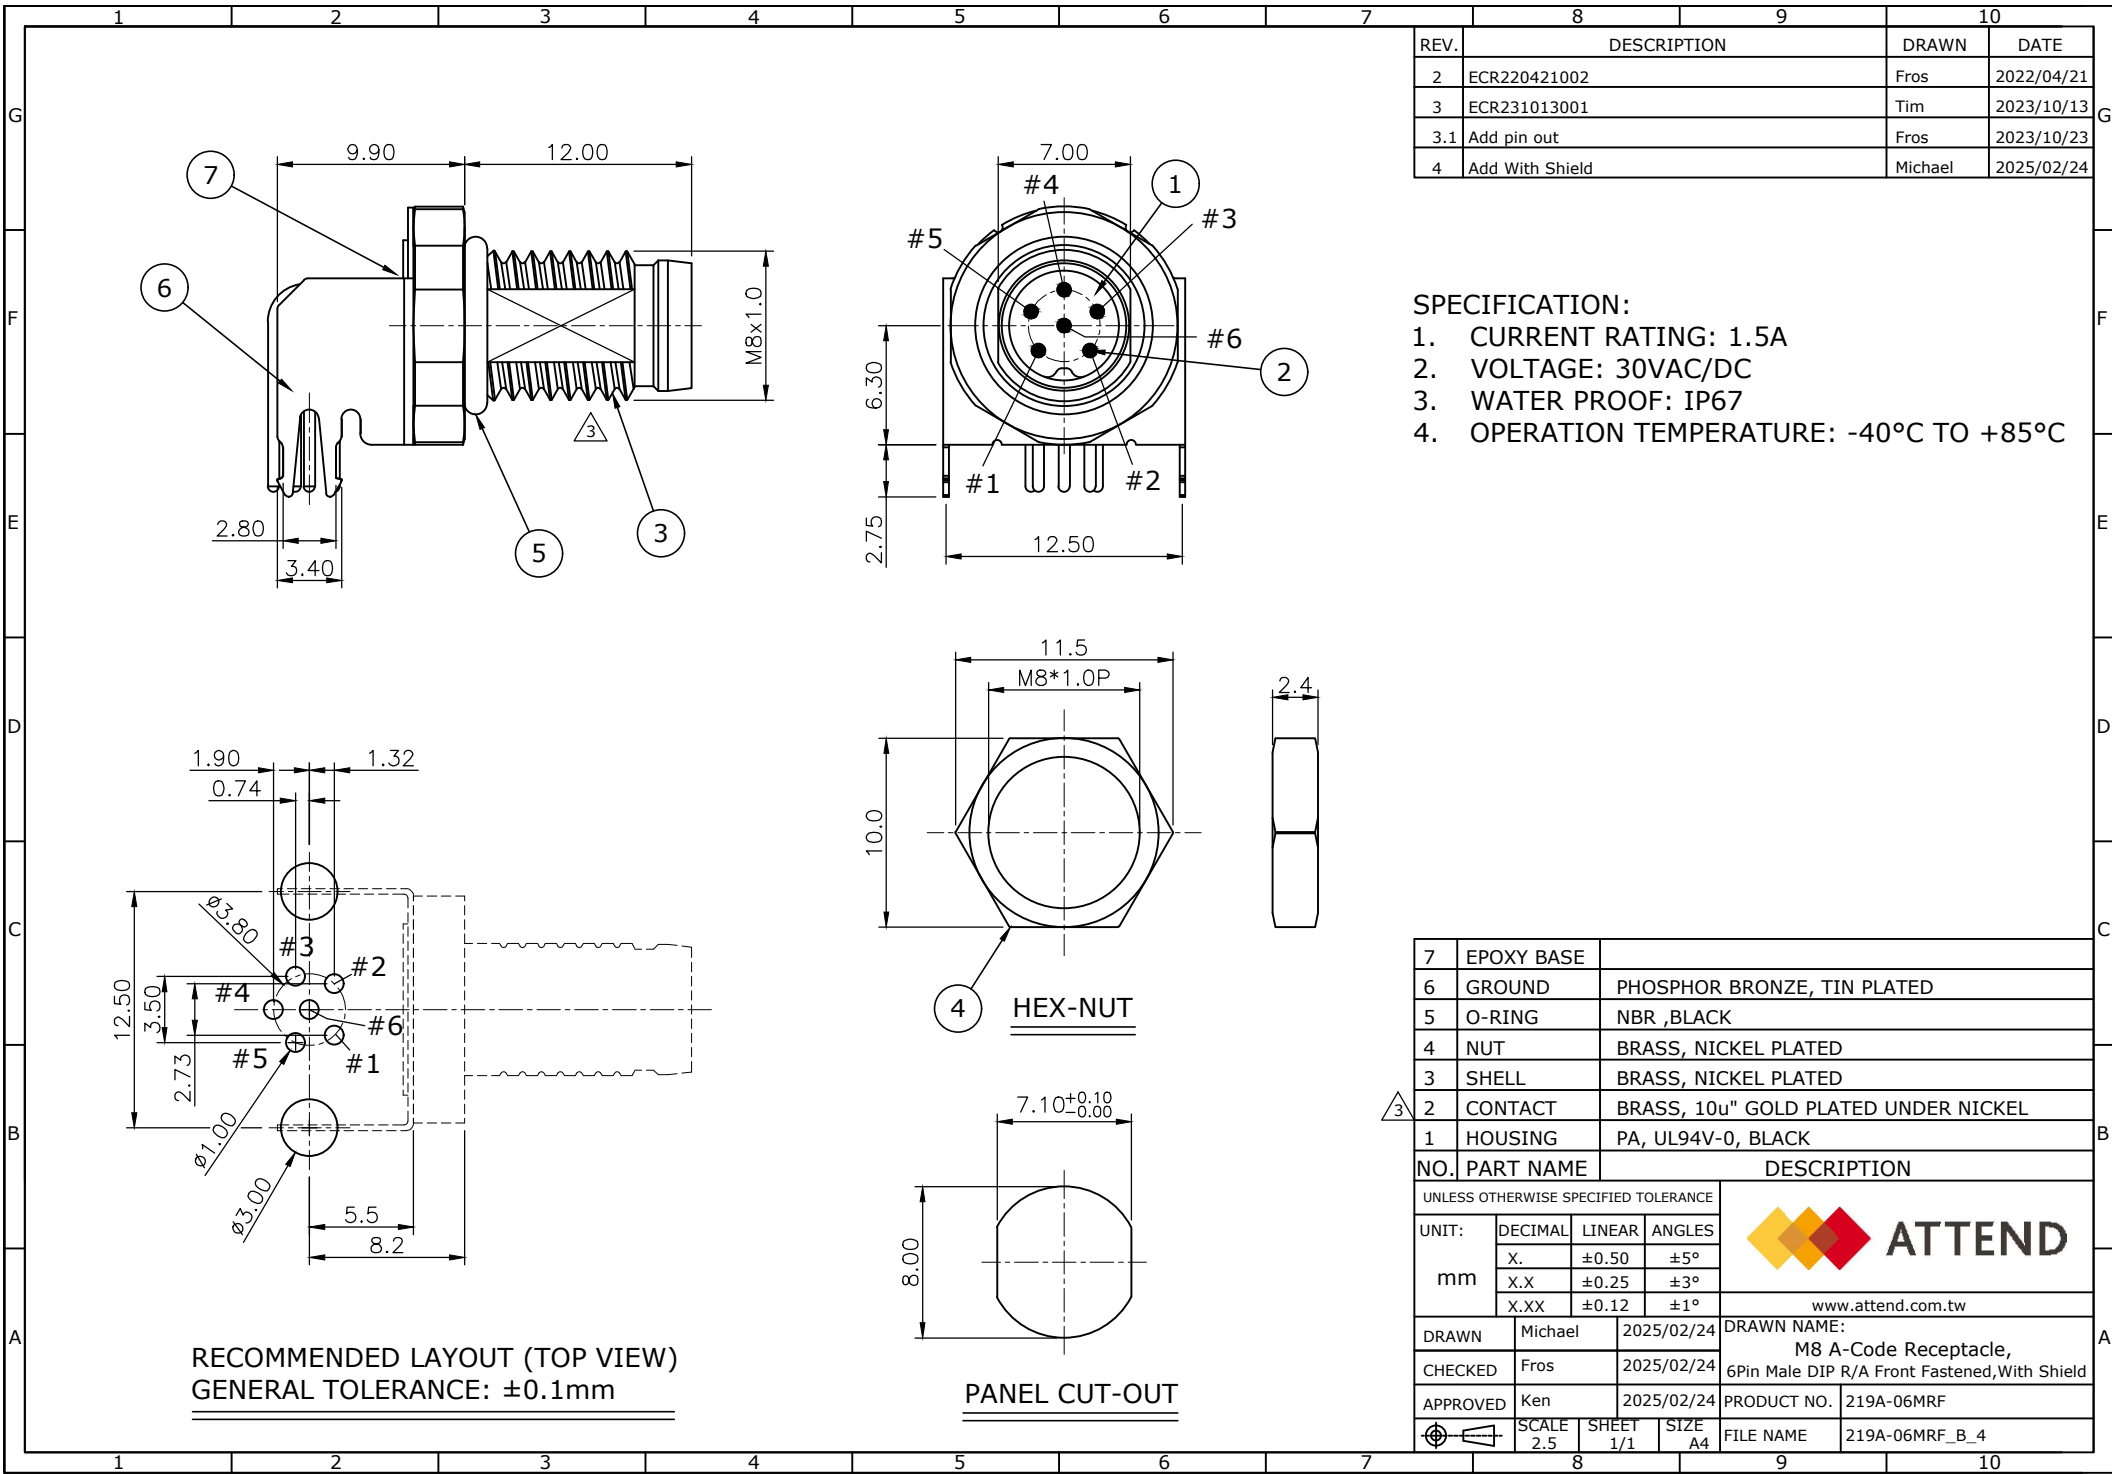


REV.	DESCRIPTION	DRAWN	DATE
2	ECR220421002	Fros	2022/04/21
3	ECR231013001	Tim	2023/10/13
3.1	Add pin out	Fros	2023/10/23
4	Add With Shield	Michael	2025/02/24


- SPECIFICATION:
1. CURRENT RATING: 1.5A
 2. VOLTAGE: 30VAC/DC
 3. WATER PROOF: IP67
 4. OPERATION TEMPERATURE: -40°C TO +85°C

7	EPOXY BASE		
6	GROUND	PHOSPHOR BRONZE, TIN PLATED	
5	O-RING	NBR ,BLACK	
4	NUT	BRASS, NICKEL PLATED	
3	SHELL	BRASS, NICKEL PLATED	
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL	
1	HOUSING	PA, UL94V-0, BLACK	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
mm			 ATTEND www.attend.com.tw
DRAWN	Michael	2025/02/24	DRAWN NAME:
CHECKED	Fros	2025/02/24	M8 A-Code Receptacle, 6Pin Male DIP R/A Front Fastened,With Shield
APPROVED	Ken	2025/02/24	PRODUCT NO. 219A-06MRF
	SCALE 2.5	SHEET 1/1	SIZE A4
FILE NAME		219A-06MRF_B_4	


1. Soldering Board

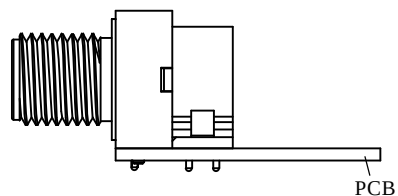

2. Installation Direction

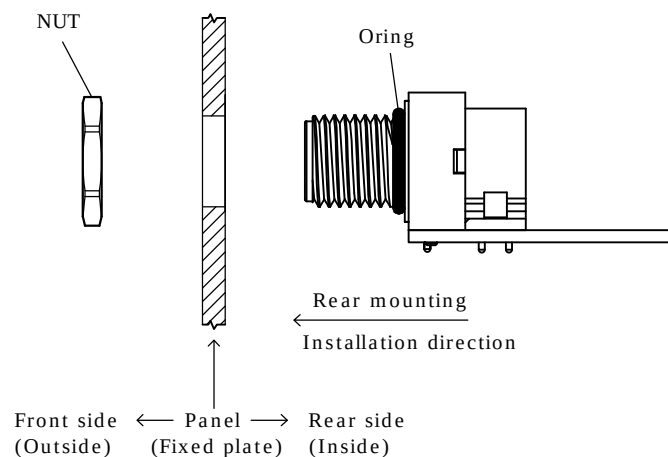

3. Connector Mated to Panel Mount

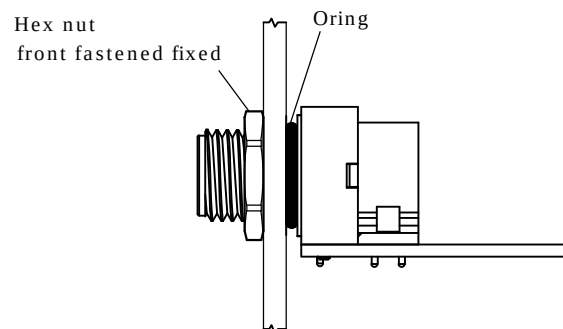

UNLESS OTHERWISE SPECIFIED TOLERANCE						
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME: M Series For Male R/A DIP Front Fastened Design Guide			
CHECKED	Fros	2025/02/25				
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MRF_DG	