


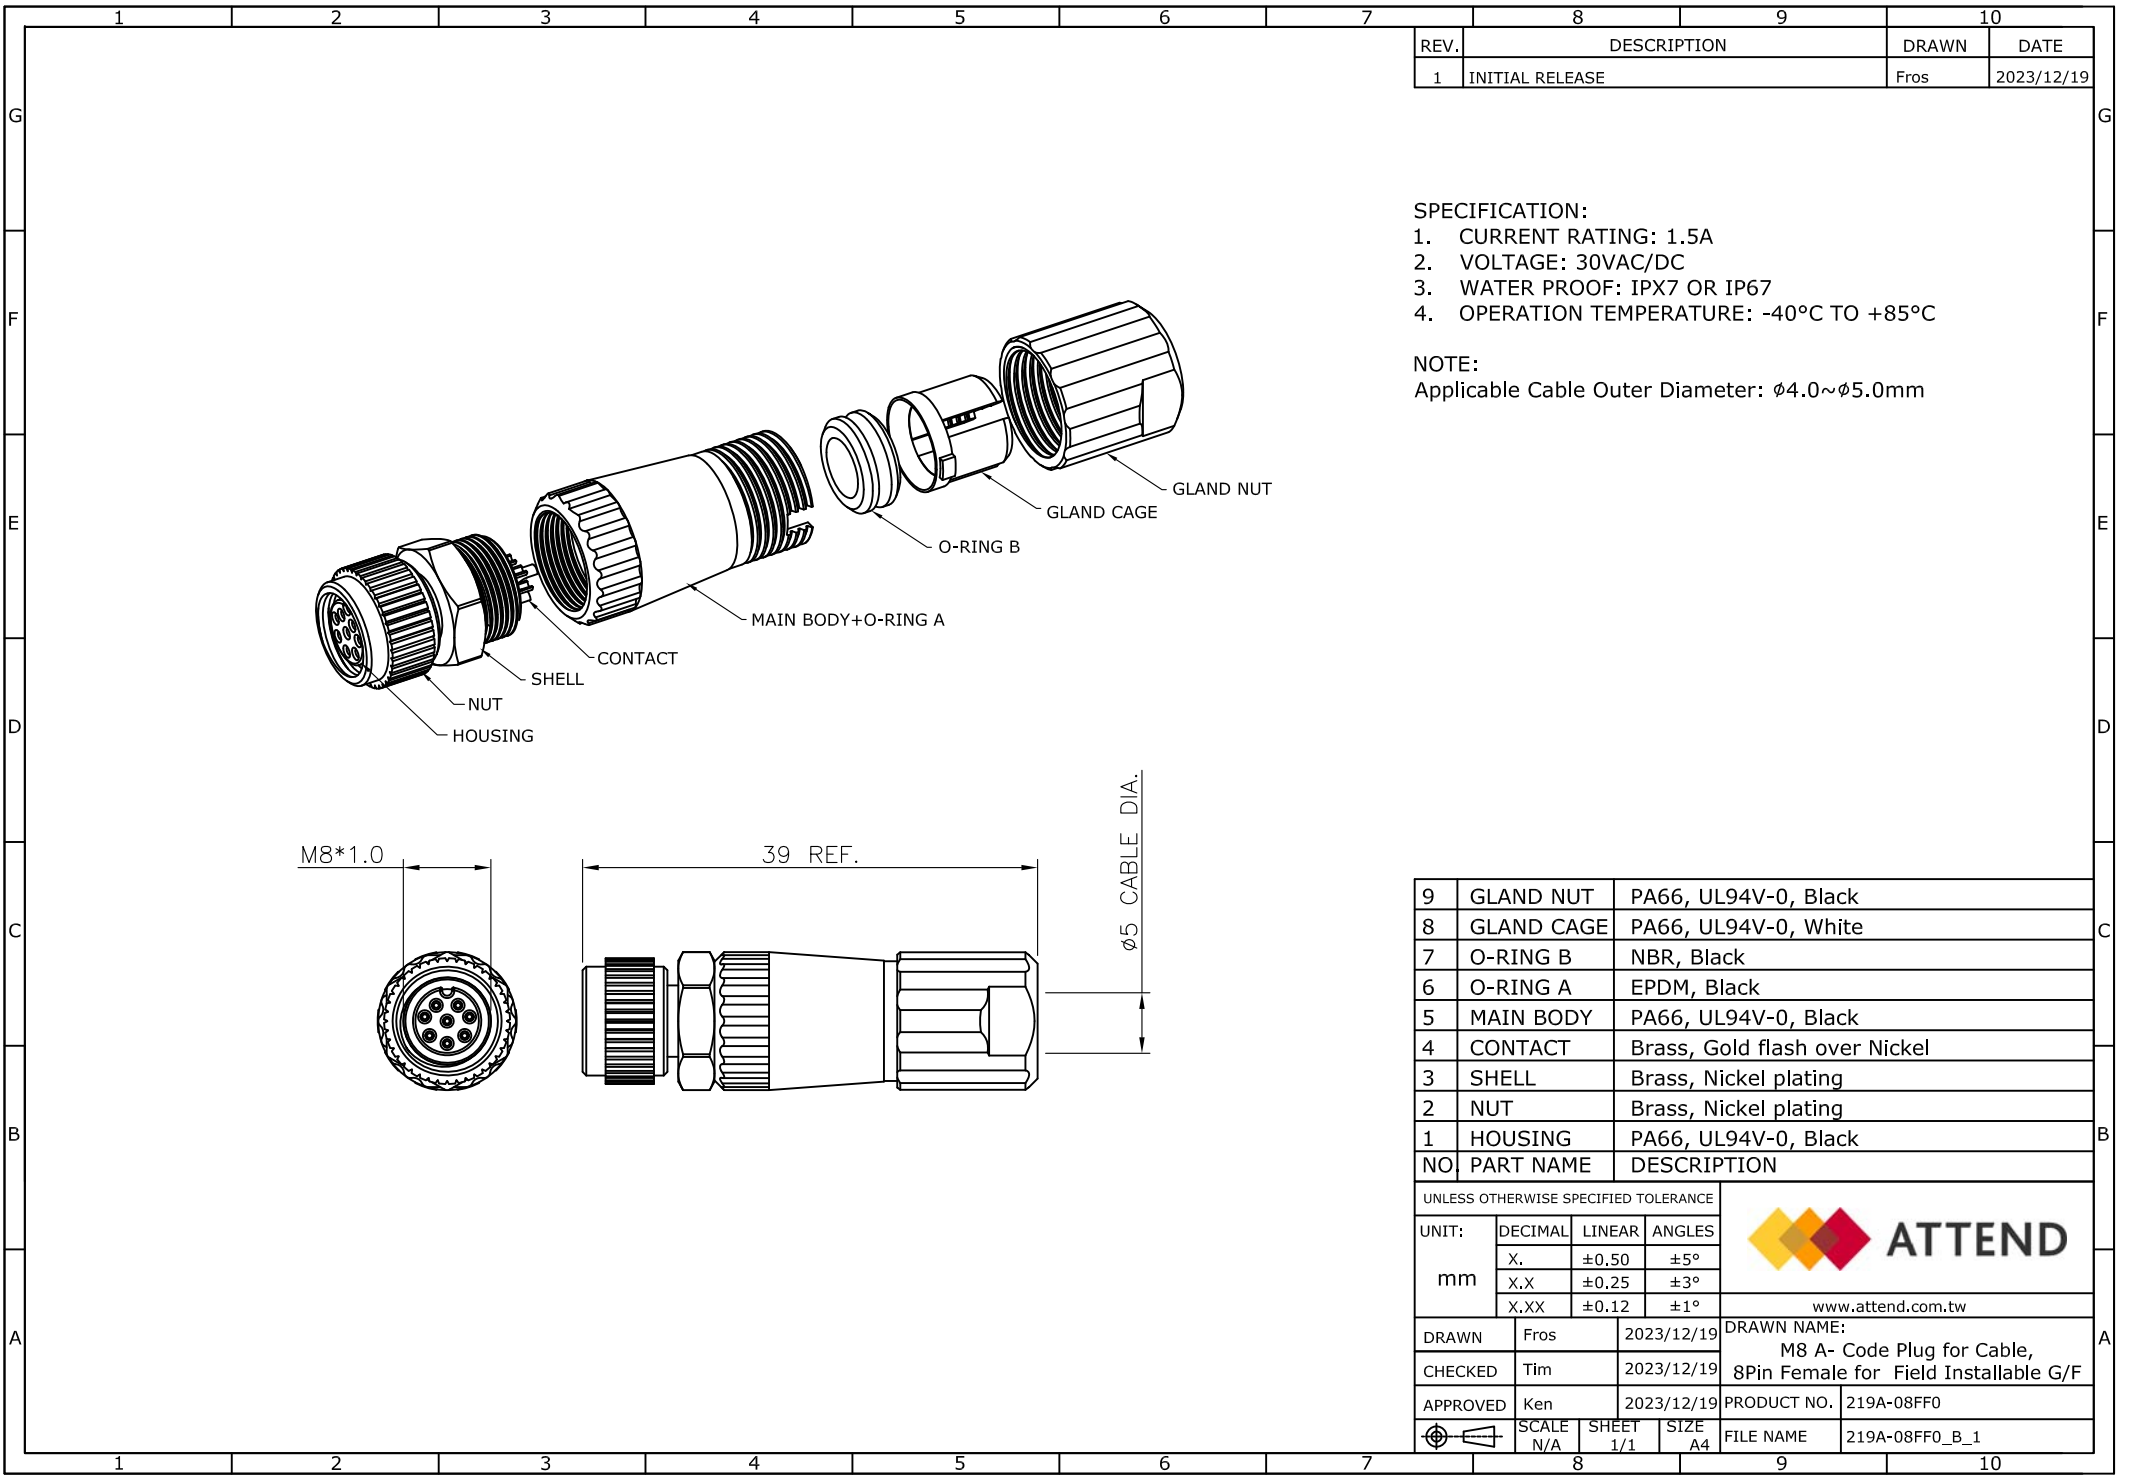

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2023/12/19

- SPECIFICATION:
- CURRENT RATING: 1.5A
 - VOLTAGE: 30VAC/DC
 - WATER PROOF: IPX7 OR IP67
 - OPERATION TEMPERATURE: -40°C TO +85°C

NOTE:
Applicable Cable Outer Diameter: $\phi 4.0 \sim \phi 5.0 \text{mm}$

9	GLAND NUT	PA66, UL94V-0, Black
8	GLAND CAGE	PA66, UL94V-0, White
7	O-RING B	NBR, Black
6	O-RING A	EPDM, Black
5	MAIN BODY	PA66, UL94V-0, Black
4	CONTACT	Brass, Gold flash over Nickel
3	SHELL	Brass, Nickel plating
2	NUT	Brass, Nickel plating
1	HOUSING	PA66, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2023/12/19	DRAWN NAME: M8 A- Code Plug for Cable, 8Pin Female for Field Installable G/F		
CHECKED	Tim	2023/12/19			
APPROVED	Ken	2023/12/19	PRODUCT NO.	219A-08FF0	
	SCALE N/A	SHEET 1/1	SIZE A4	FILE NAME	219A-08FF0_B_1

