
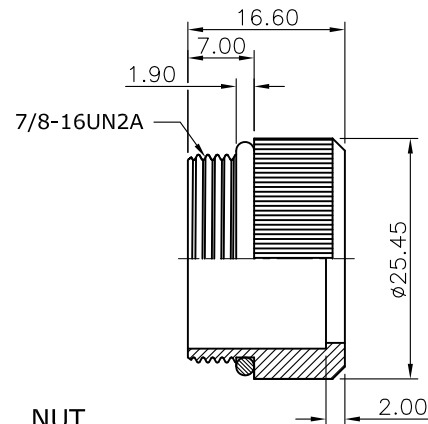

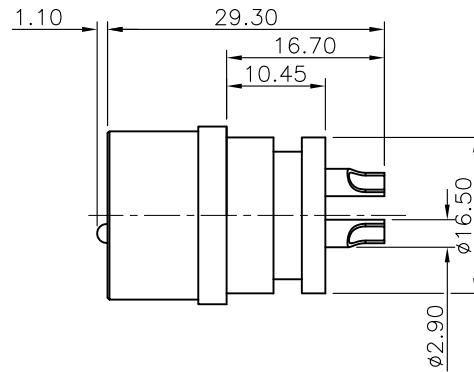




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/09/02

SPECIFICATION:

1. CURRENT RATING: 20A
2. VOLTAGE: 125V
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -20°C TO +85°C








NUT

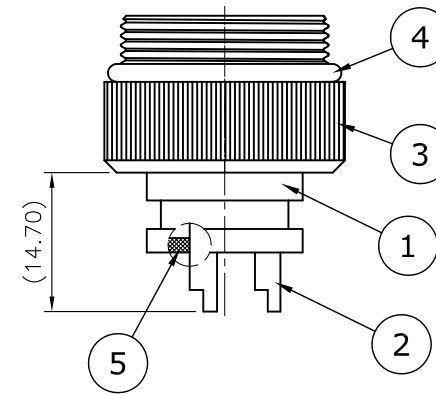

5	EPOXY BASE	EF400A&EF400B,Black
4	O-RING	NBR,Black
3	NUT	Brass, Nickel plated
2	CONTACT	Brass, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Yellow
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				WWW.ATTEND.COM.TW	
DRAWN		Tim	2016/09/02	DRAWN NAME: M23 A-Code Plug for Cable 4Pin Male For Overmold with Cable	
CHECKED		Fros	2016/09/02		
APPROVED		Ken	2016/09/02	PRODUCT NO. 221A-04MO0	
		SCALE 1.25	SHEET 1/1	SIZE A4	FILE NAME 221A-04MO0_B_0

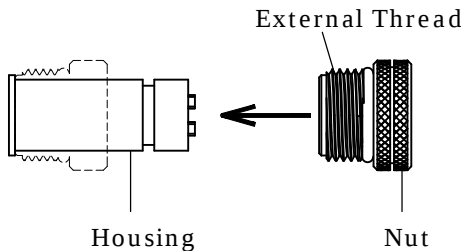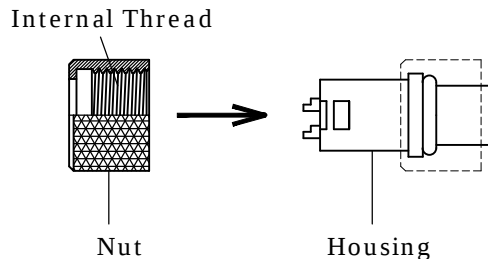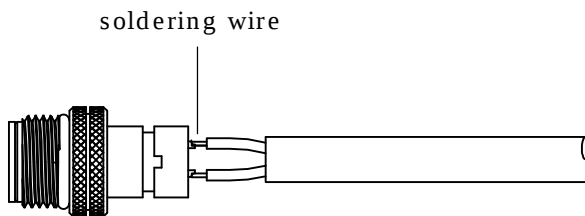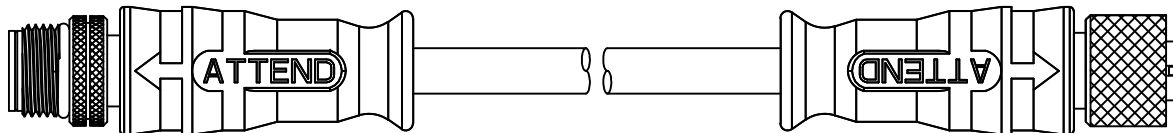							REV.	DESCRIPTION		DRAWN	DATE																																																								
1. Setting Connector																																																																			
																																																																			
<u>Male Connector</u>						<u>Female Connector</u>																																																													
2. Wire Processing																																																																			
																																																																			
3. Overmolded Cable Assemblies																																																																			
						<table><tr><td colspan="5">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="2" rowspan="4"></td></tr><tr><td>UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td colspan="2">ANGLES</td></tr><tr><td rowspan="2">m m</td><td>X.</td><td>±0.50</td><td colspan="2">±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td colspan="2">±3°</td></tr><tr><td></td><td>X.XX</td><td>±0.12</td><td colspan="2">±1°</td><td colspan="2">WWW.ATTEND.COM.TW</td></tr><tr><td>DRAWN</td><td colspan="2">Tim</td><td colspan="2">2025/02/25</td><td colspan="2" rowspan="3">DRAWN NAME: M Series For Male Cable Overmold Type Design Guide</td></tr><tr><td>CHECKED</td><td colspan="2">Fros</td><td colspan="2">2025/02/25</td></tr><tr><td>APPROVED</td><td colspan="2">Ken</td><td colspan="2">2025/02/25</td></tr><tr><td rowspan="2"></td><td>SCALE</td><td>SHEET</td><td>SIZE</td><td colspan="2">FILE NAME</td></tr><tr><td></td><td>1/1</td><td>A4</td><td colspan="2">M Series MO0_DG</td></tr></table>						UNLESS OTHERWISE SPECIFIED TOLERANCE							UNIT:	DECIMAL	LINEAR	ANGLES		m m	X.	±0.50	±5°		X.X	±0.25	±3°			X.XX	±0.12	±1°		WWW.ATTEND.COM.TW		DRAWN	Tim		2025/02/25		DRAWN NAME: M Series For Male Cable Overmold Type Design Guide		CHECKED	Fros		2025/02/25		APPROVED	Ken		2025/02/25			SCALE	SHEET	SIZE	FILE NAME			1/1	A4	M Series MO0_DG	
UNLESS OTHERWISE SPECIFIED TOLERANCE																																																																			
UNIT:	DECIMAL	LINEAR	ANGLES																																																																
m m	X.	±0.50	±5°																																																																
	X.X	±0.25	±3°																																																																
	X.XX	±0.12	±1°		WWW.ATTEND.COM.TW																																																														
DRAWN	Tim		2025/02/25		DRAWN NAME: M Series For Male Cable Overmold Type Design Guide																																																														
CHECKED	Fros		2025/02/25																																																																
APPROVED	Ken		2025/02/25																																																																
	SCALE	SHEET	SIZE	FILE NAME																																																															
		1/1	A4	M Series MO0_DG																																																															