



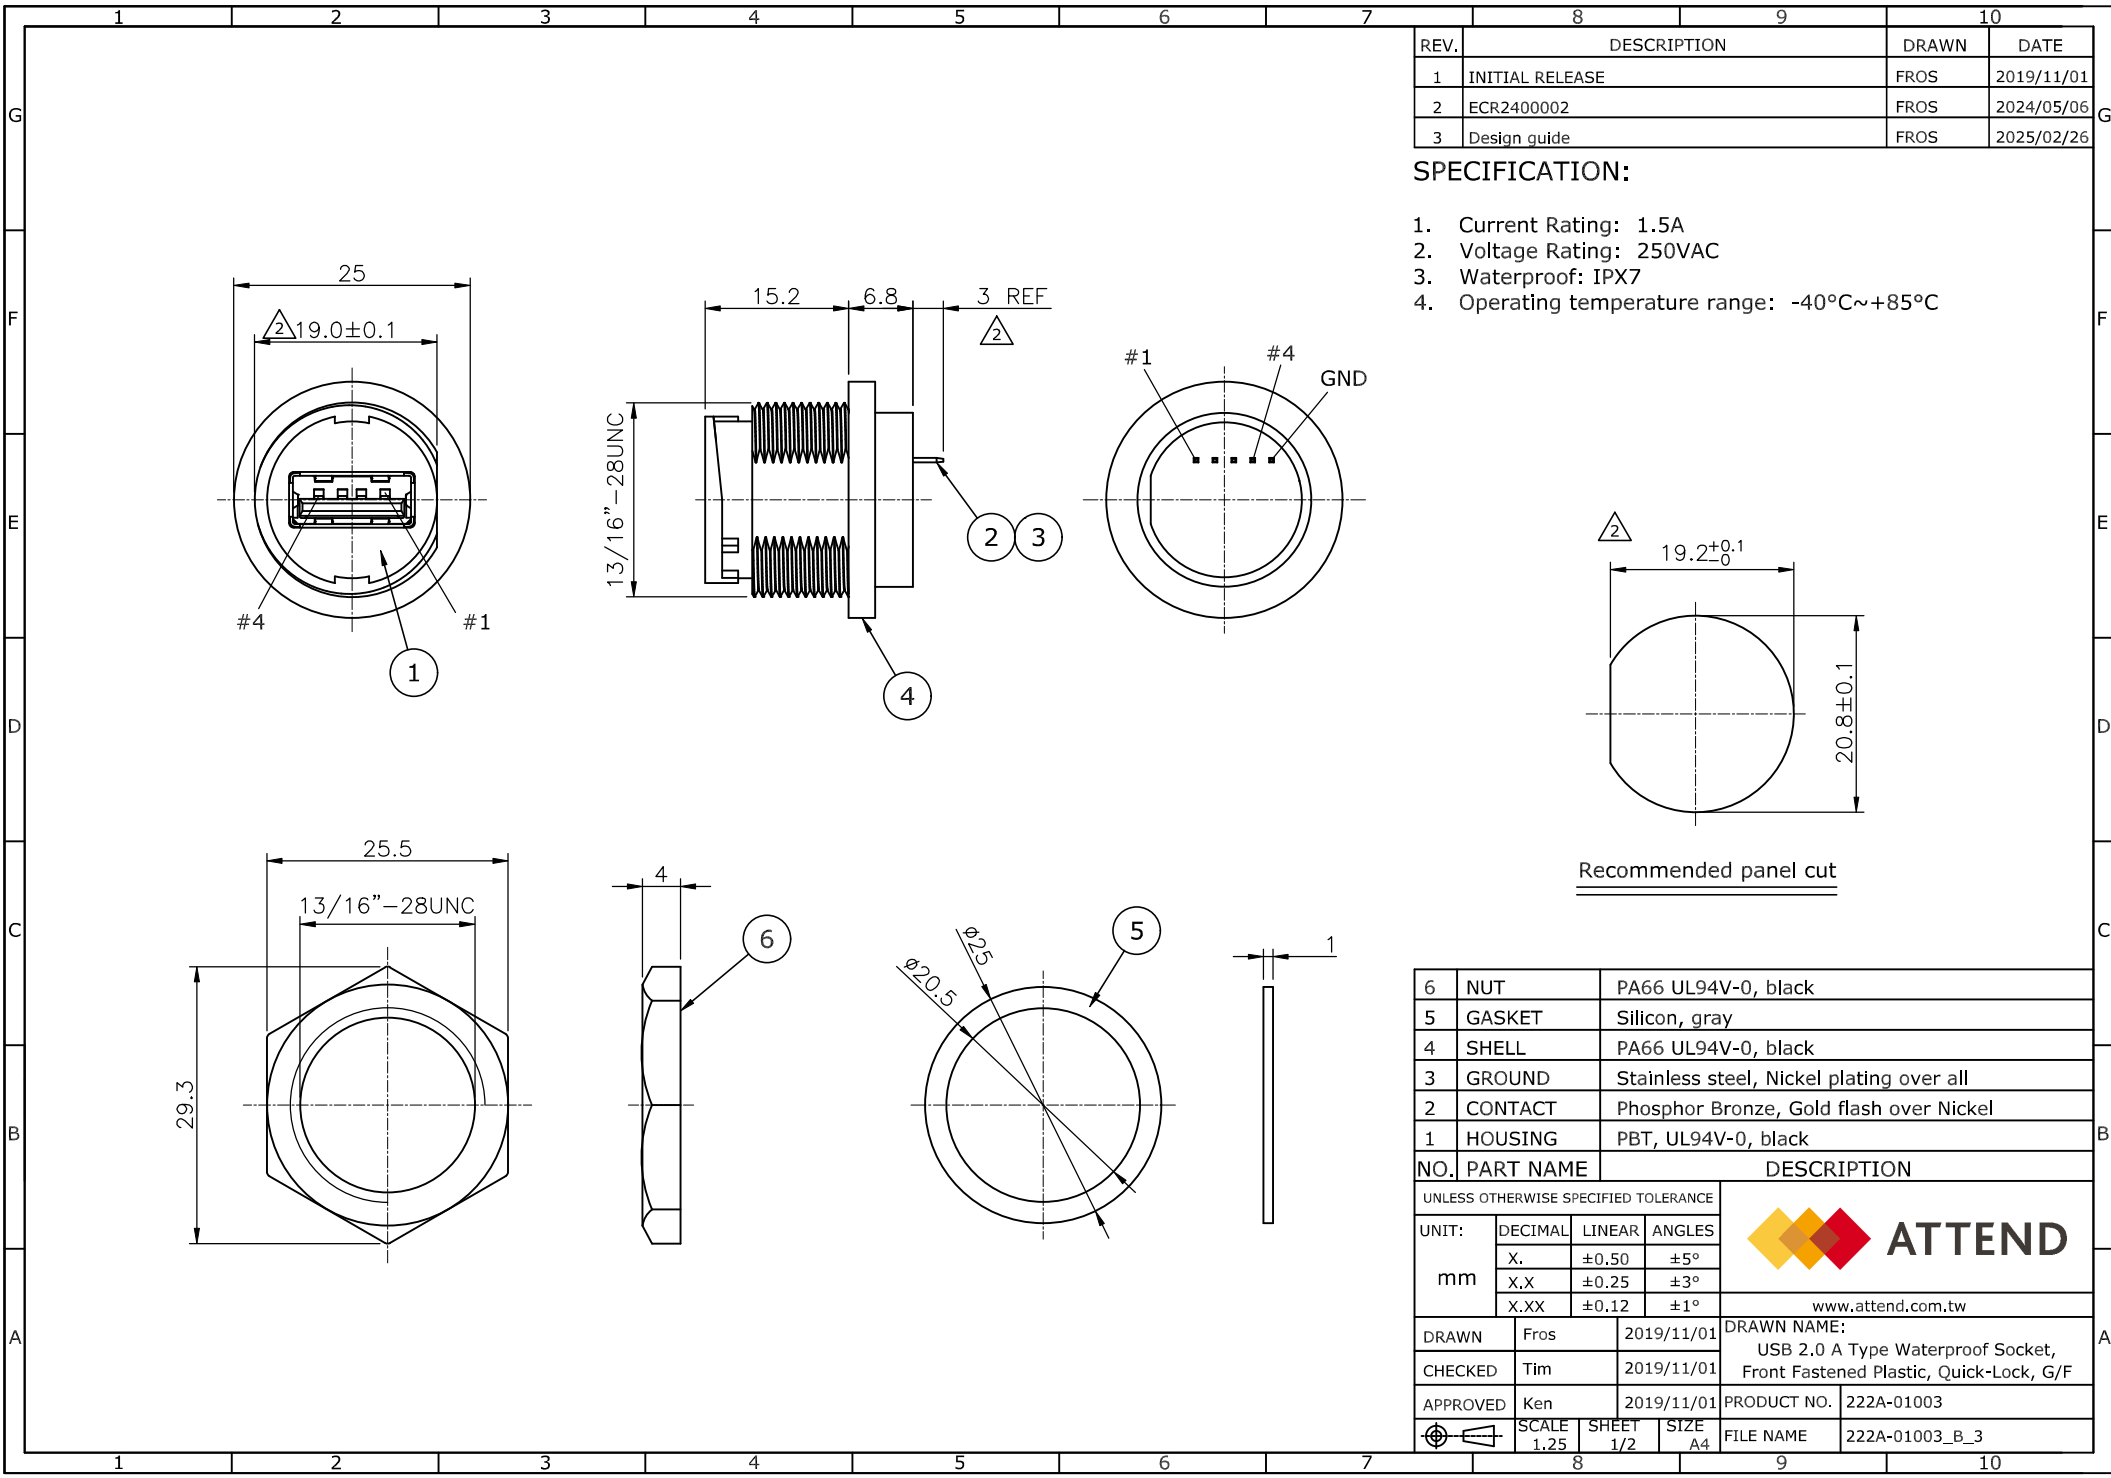

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2019/11/01
2	ECR2400002	FROS	2024/05/06
3	Design guide	FROS	2025/02/26

SPECIFICATION:

- 1. Current Rating: 1.5A
- 2. Voltage Rating: 250VAC
- 3. Waterproof: IPX7
- 4. Operating temperature range: -40°C~+85°C



Recommended panel cut

6	NUT	PA66 UL94V-0, black
5	GASKET	Silicon, gray
4	SHELL	PA66 UL94V-0, black
3	GROUND	Stainless steel, Nickel plating over all
2	CONTACT	Phosphor Bronze, Gold flash over Nickel
1	HOUSING	PBT, UL94V-0, black


NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
mm					
				www.attend.com.tw	
DRAWN	Fros		2019/11/01		
CHECKED	Tim		2019/11/01		
APPROVED	Ken		2019/11/01		
	SCALE	SHEET	SIZE	PRODUCT NO.	
	1.25	1/2	A4	222A-01003	
				FILE NAME	
			222A-01003_B_3		




www.attend.com.tw

DESIGN GUIDE


Panel assembly
1 welding wire

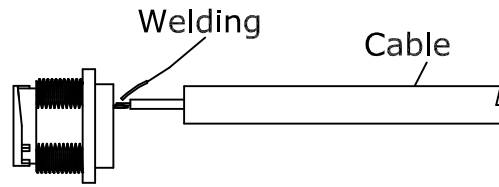


2 assembly inner molding

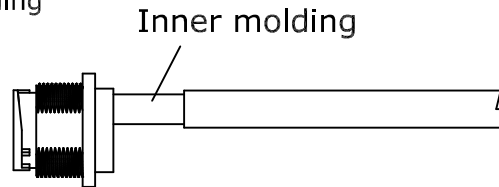


3 assembly

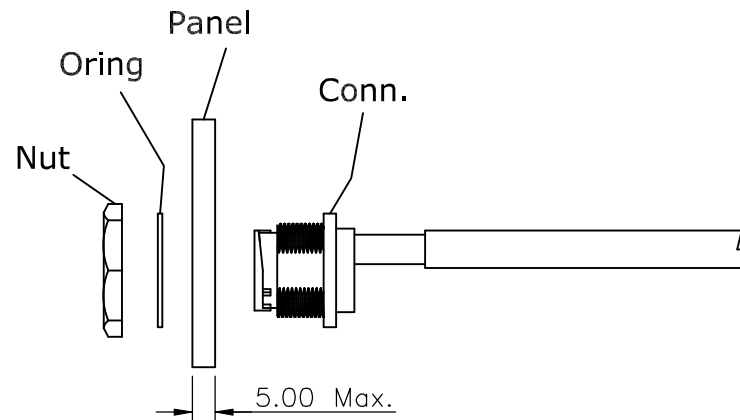


4 completion

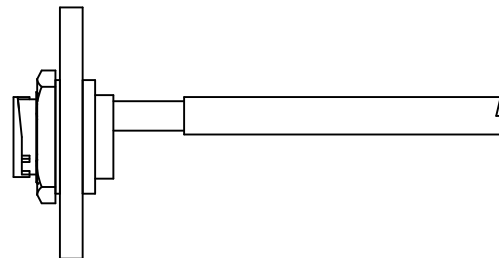


Cable assembly
1 welding wire

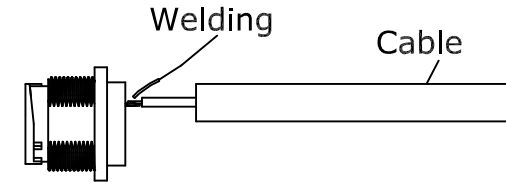

2 assembly inner molding

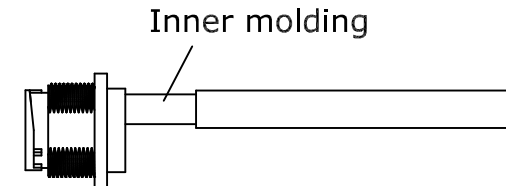

3 completion

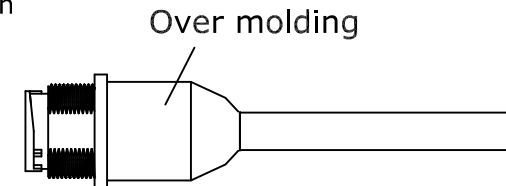

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND			
UNIT: mm	DECIMAL	LINEAR	ANGLES			www.attend.com.tw	
	X.	±0.50	±5°				
	X,X	±0.25	±3°				
	X,XX	±0.12	±1°				
DRAWN		Fros	2019/11/01	DRAWN NAME: USB 2.0 A Type Waterproof Socket, Front Fastened Plastic, Quick-Lock, G/F			
CHECKED		Tim	2019/11/01				
APPROVED		Ken	2019/11/01	PRODUCT NO.	222A-01003		
	SCALE 1:25	SHEET 2/2	SIZE A4	FILE NAME	222A-01003_B_3		