


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/09/19
2	DESIGN GUIDE	Fros	2025/02/26

SPECIFICATION:

- 1.1 Current Rating: 2A per pin
- 1.2 Voltage Rating: 250V AC/DC
- 1.3 Water Proof: IPX7
- 1.4 Operation Temperature: -40°C to +85°C

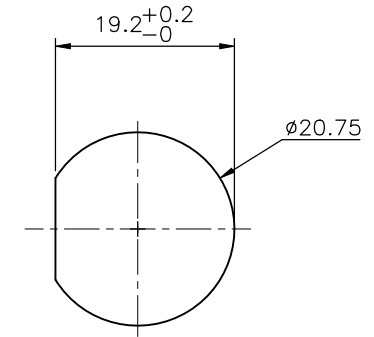


Recommended Panel Cut Out

7	EPOXY BASE	EF400A&EF400B, Black
6	NUT	Brass, Nickel plating
5	O-RING	EPDM, Black
4	GROUND	SUS301, Nickel plating
3	SHELL	Zn Alloy, Nickel plating
2	CONTACT	Phosphor Bronze, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black




NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
WWW.ATTEND.COM.TW					
DRAWN	Tim	2016/09/19		DRAWN NAME: RJ45 8P8C Water Proof Socket	
CHECKED	Fros	2016/09/19			
APPROVED	Ken	2016/09/19		PRODUCT NO.	222A-03001
	SCALE 1.25	SHEET 1/2	SIZE A4	FILE NAME	222A-03001_B_2




WWW.ATTEND.COM.TW

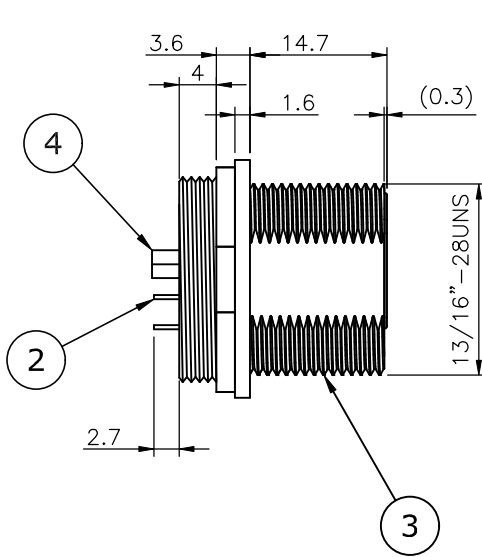

Recommended Layout (top veiw)
General Tolerance: ±0.10mm

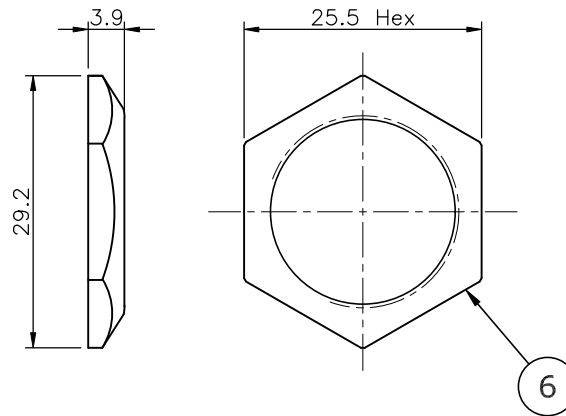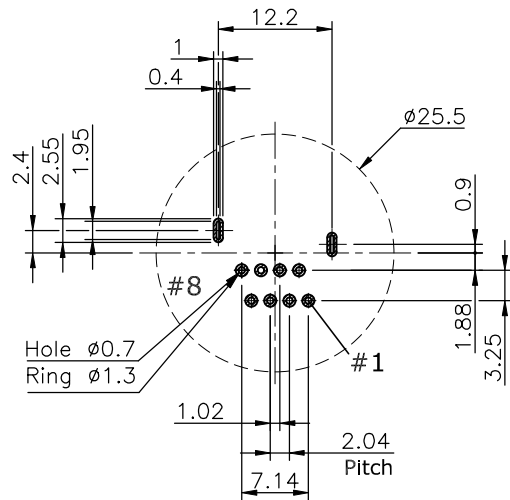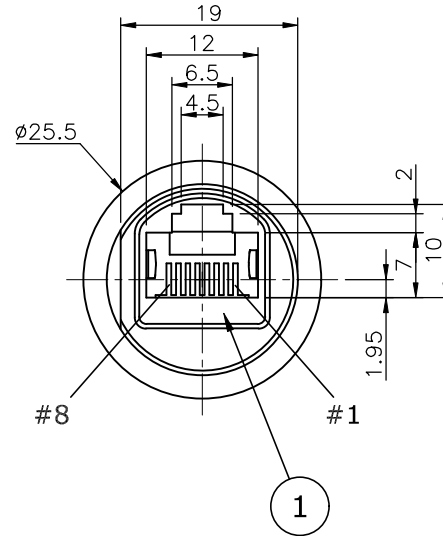

Nut

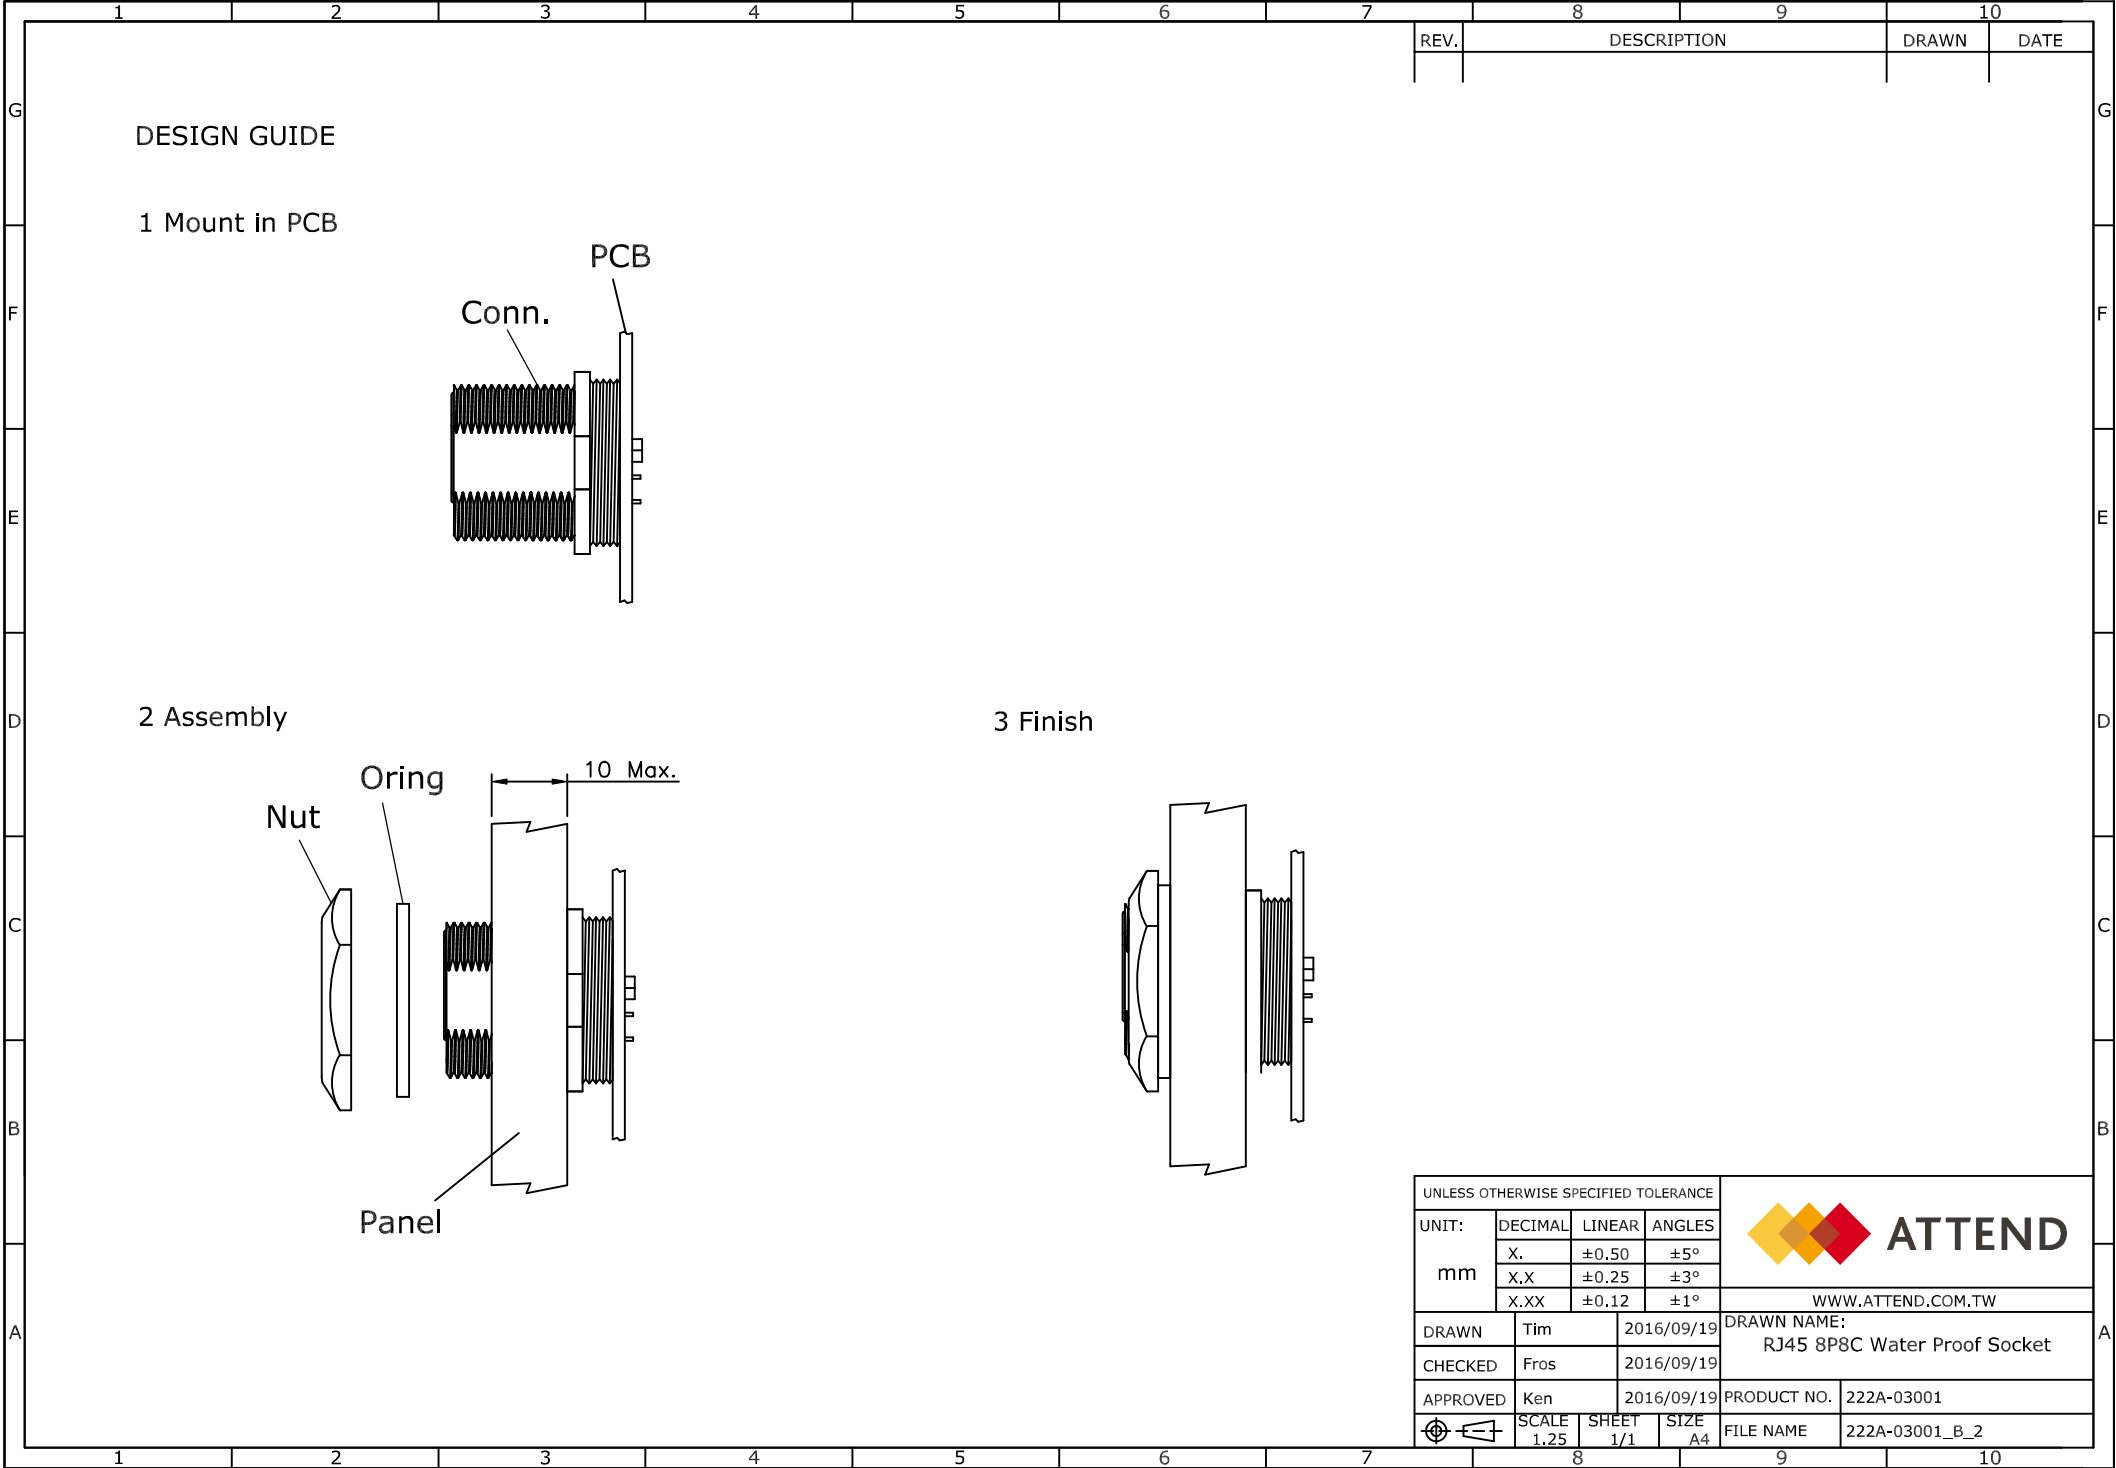

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
mm				WWW.ATTEND.COM.TW	
DRAWN		Tim	2016/09/19	DRAWN NAME: RJ45 8P8C Water Proof Socket	
CHECKED		Fros	2016/09/19		
APPROVED		Ken	2016/09/19	PRODUCT NO.	222A-03001
	SCALE 1.25	SHEET 1/1	SIZE A4	FILE NAME	222A-03001_B_2