


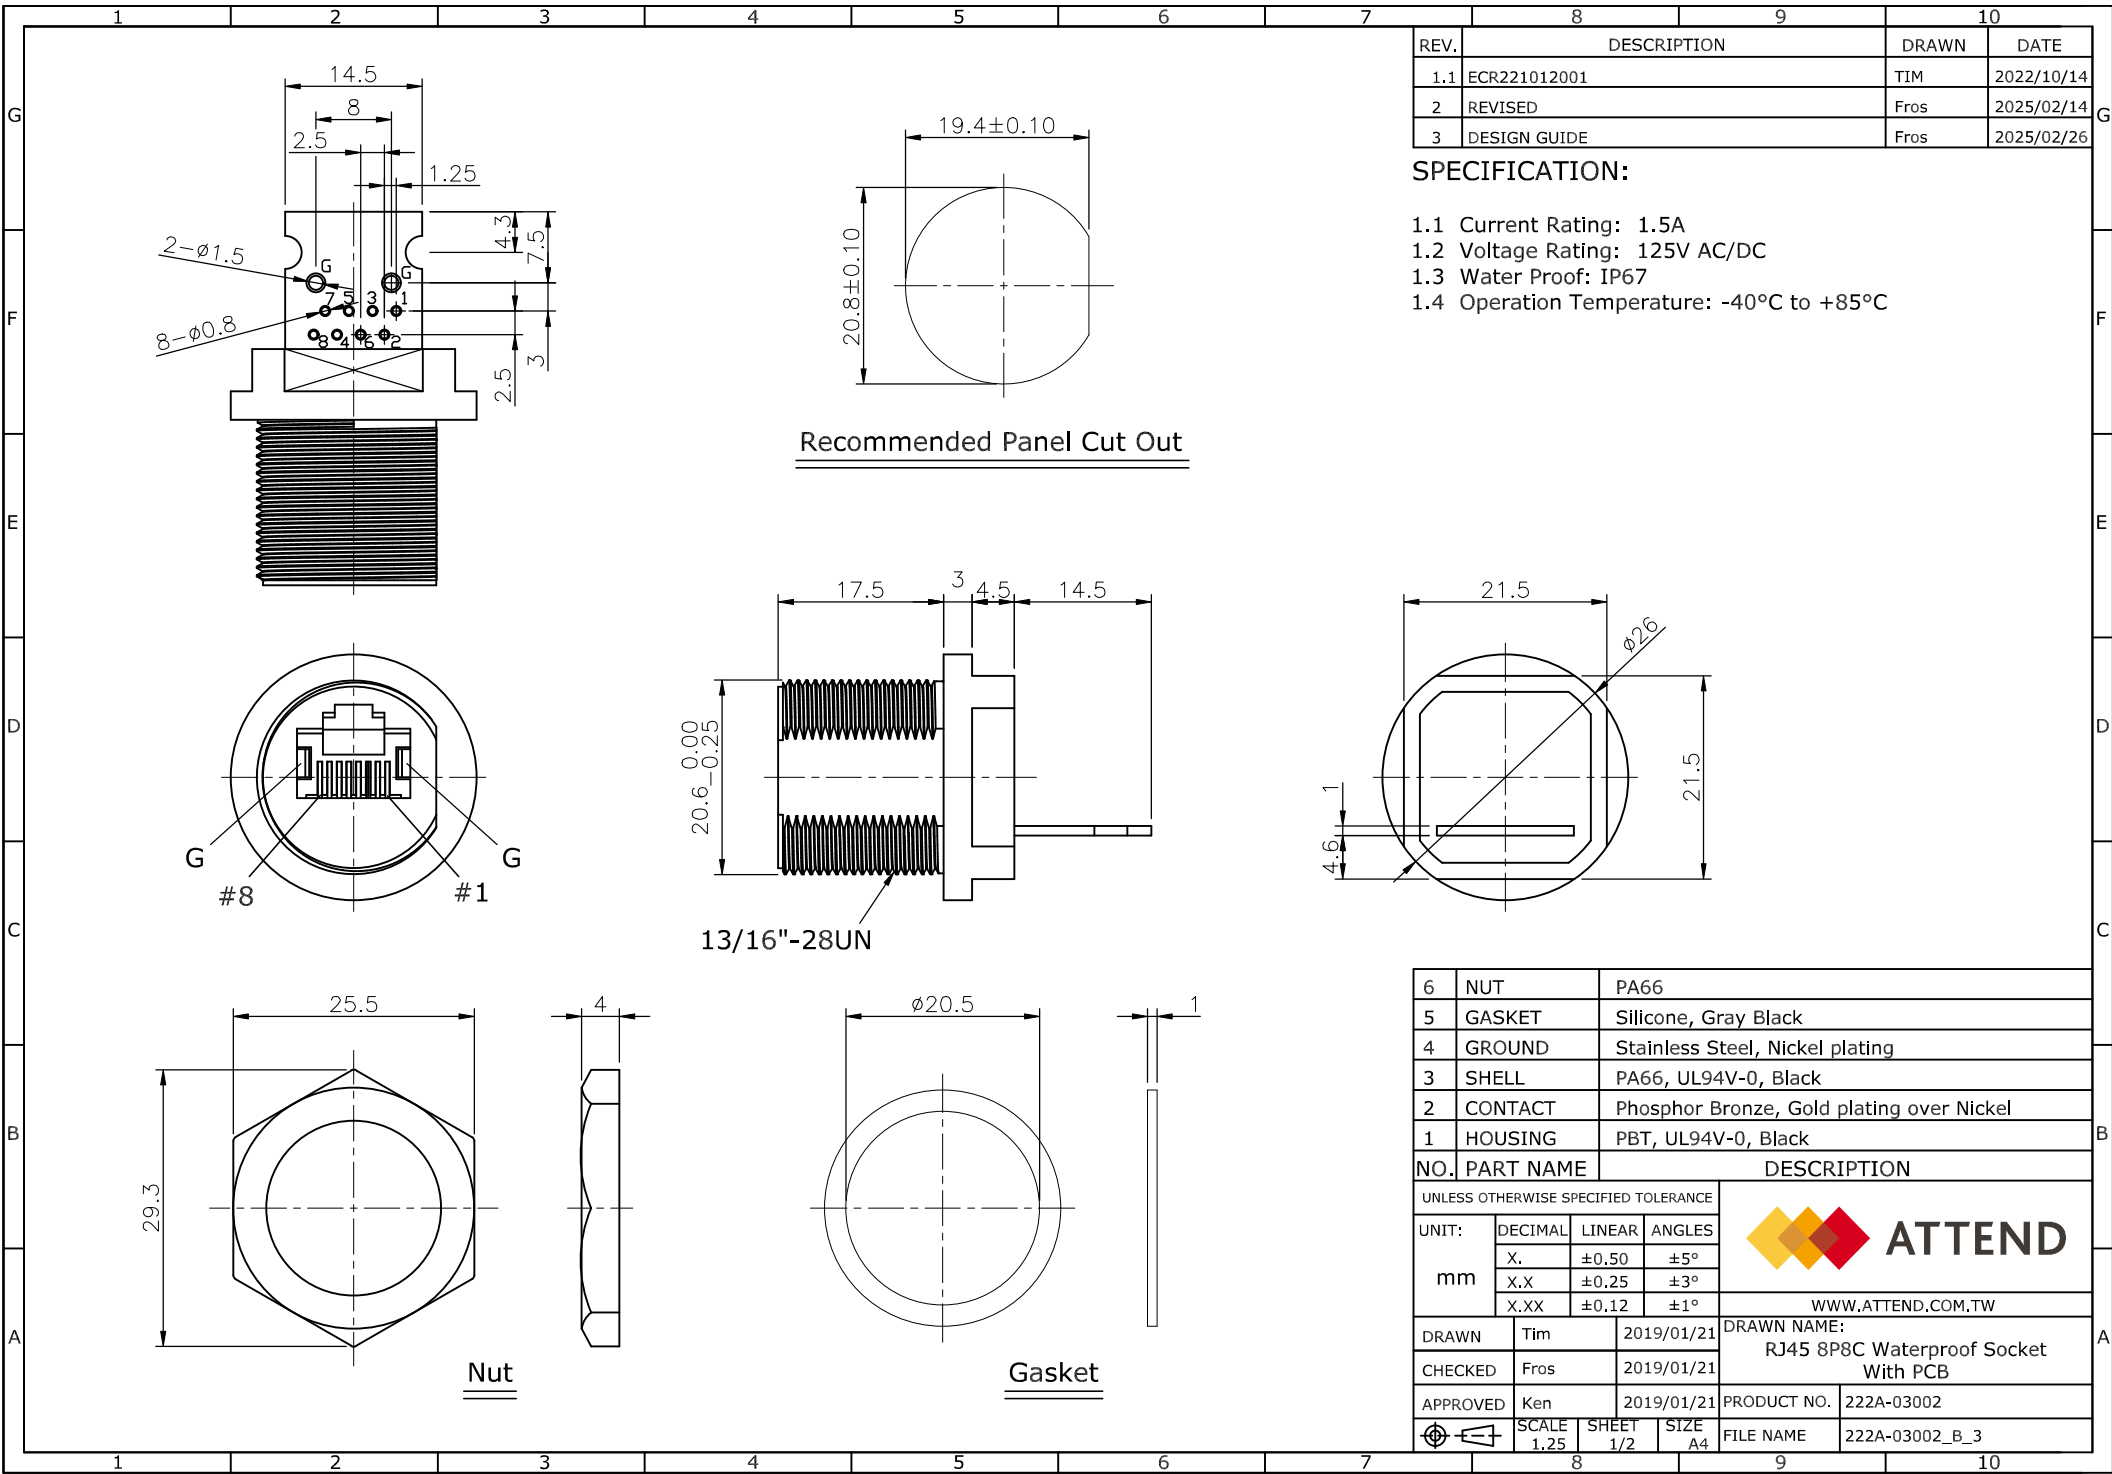

REV.	DESCRIPTION	DRAWN	DATE
1.1	ECR221012001	TIM	2022/10/14
2	REVISED	Fros	2025/02/14
3	DESIGN GUIDE	Fros	2025/02/26


SPECIFICATION:

- 1.1 Current Rating: 1.5A
- 1.2 Voltage Rating: 125V AC/DC
- 1.3 Water Proof: IP67
- 1.4 Operation Temperature: -40°C to +85°C


6	NUT	PA66		
5	GASKET	Silicone, Gray Black		
4	GROUND	Stainless Steel, Nickel plating		
3	SHELL	PA66, UL94V-0, Black		
2	CONTACT	Phosphor Bronze, Gold plating over Nickel		
1	HOUSING	PBT, UL94V-0, Black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT: mm	DECIMAL	LINEAR	ANGLES	
	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
			 ATTEND WWW.ATTEND.COM,TW	
DRAWN	Tim	2019/01/21	DRAWN NAME: RJ45 8P8C Waterproof Socket With PCB	
CHECKED	Fros	2019/01/21		
APPROVED	Ken	2019/01/21	PRODUCT NO.	222A-03002
	SCALE	SHEET	SIZE	FILE NAME
	1.25	1/2	A4	
			222A-03002_B_3	

DESIGN GUIDE


1 Welding wire

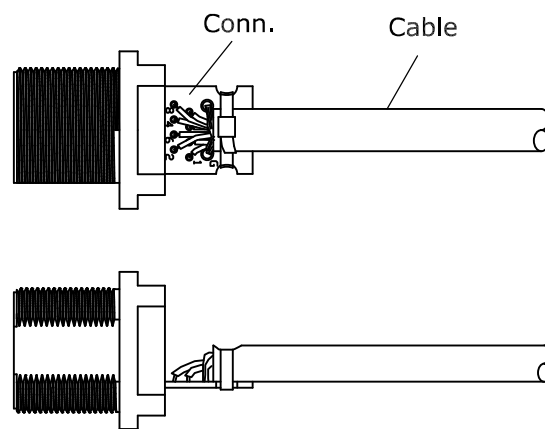

2 Assembly

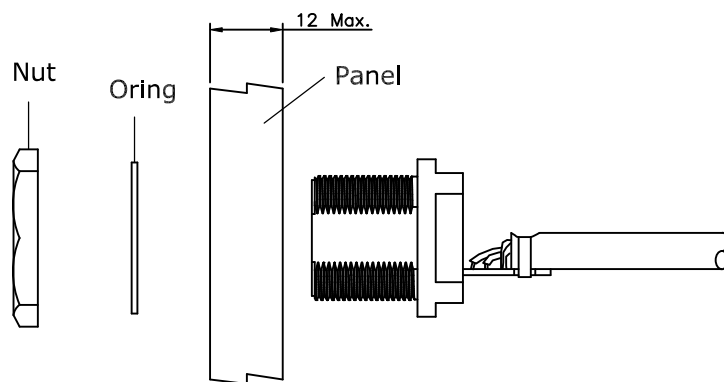

3 Finish

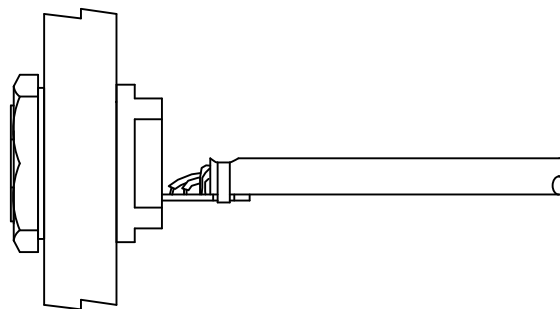

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				WWW.ATTEND.COM,TW	
DRAWN	Tim	2019/01/21	DRAWN NAME: RJ45 8P8C Waterproof Socket With PCB		
CHECKED	Fros	2019/01/21			
APPROVED	Ken	2019/01/21	PRODUCT NO.	222A-03002	
	SCALE	SHEET	SIZE	FILE NAME	
	1.25	2/2	A4	222A-03002_B_3	