


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/09/05
2	DESIGN GUIDE	Fros	2025/02/27

SPECIFICATION:

1. CURRENT RATING: 1A
2. VOLTAGE: 30V
3. WATER PROOF: IP67

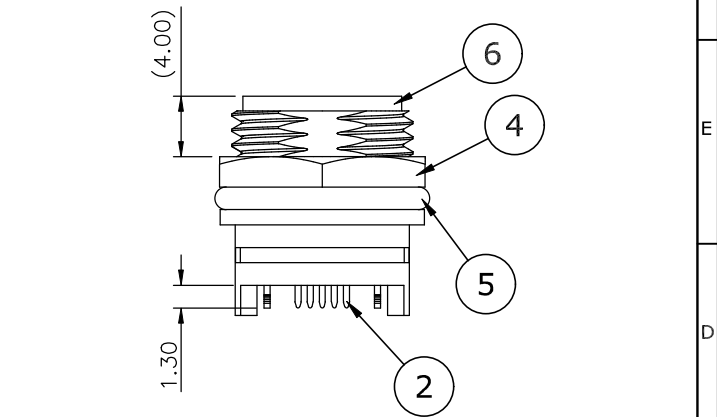


7	EPOXY BASE	
6	BODY	PBT, UL94V-0,Black
5	O-RING	EPDM,Black
4	NUT	PBT, UL94V-0,Black
3	SHELL	Brass, Nickel plating
2	CONTACT	Phosphor Bronze, Gold plating on contact area, Tin plating on solder tail,under plated Nickel
1	HOUSING	LCP, UL94V-0,Black
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN	Tim	2016/09/05	DRAWN NAME:
CHECKED	Fros	2016/09/05	MINI USB Type Waterproof Socket
APPROVED	Ken	2016/09/05	PRODUCT NO.
SCALE	1/1	SHEET	1/2
SIZE	A4	FILE NAME	222A-04001_B_2







WWW.ATTEND.COM.TW

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.10mm

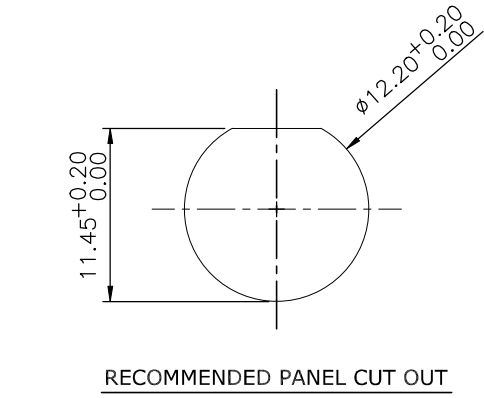

NUT

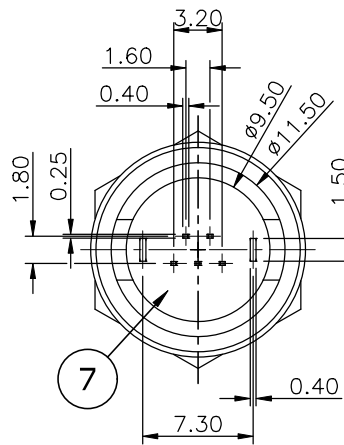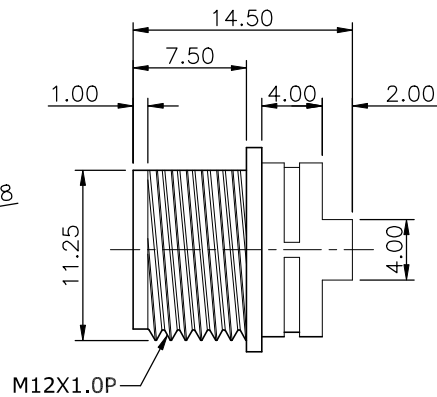

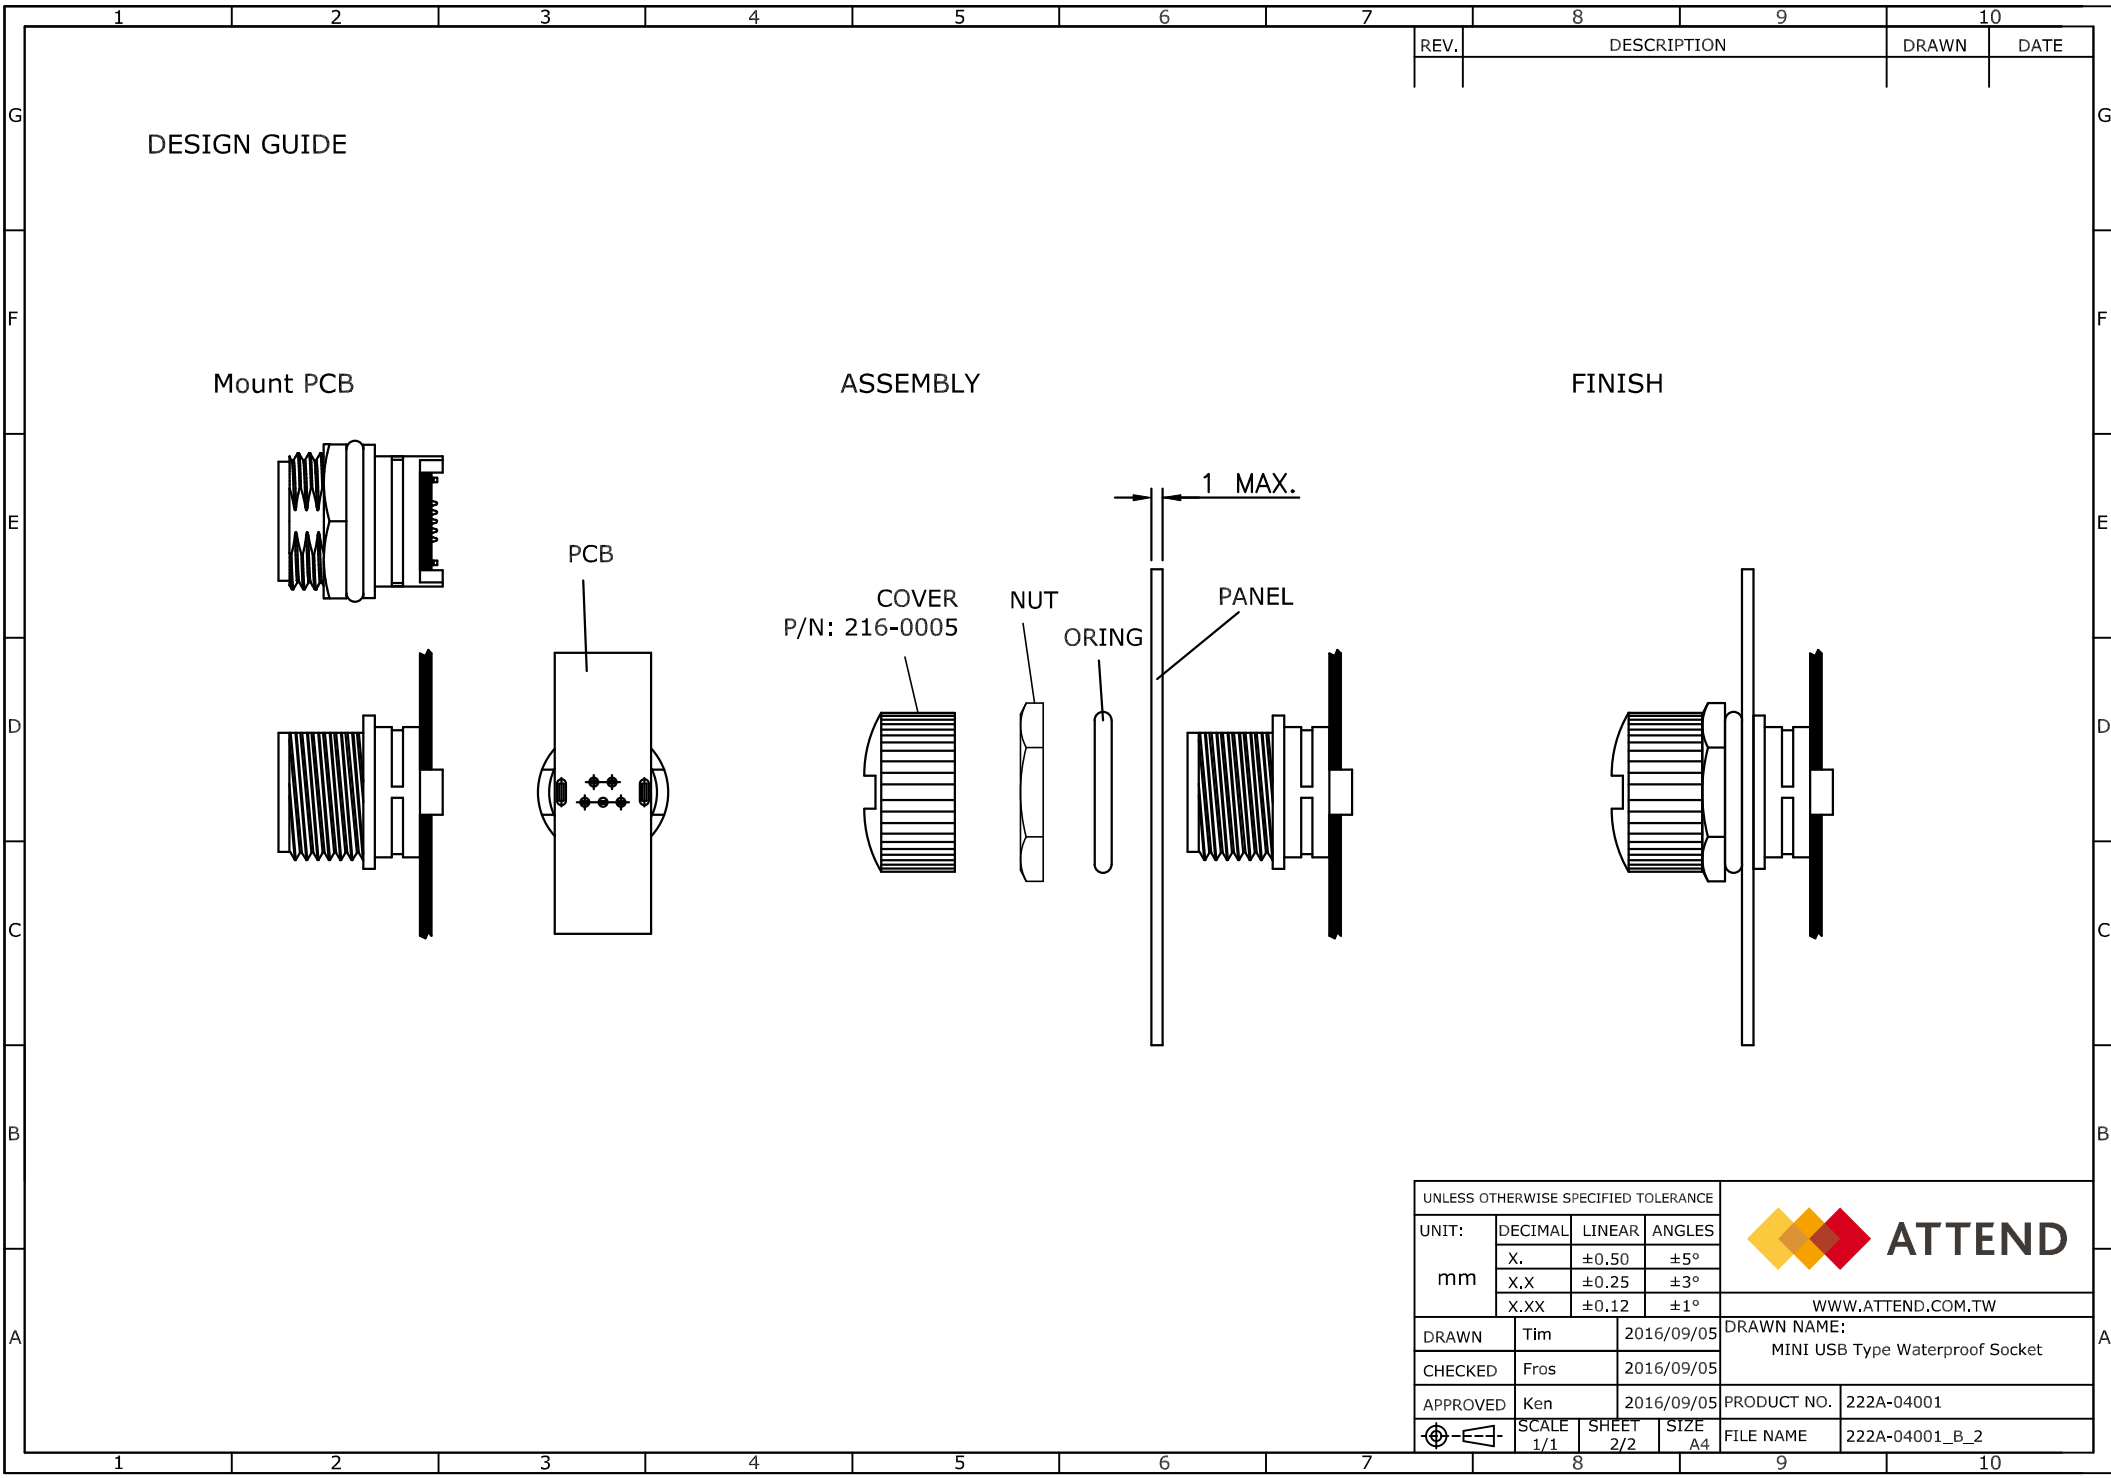

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
WWW.ATTEND.COM.TW					
DRAWN	Tim	2016/09/05	DRAWN NAME: MINI USB Type Waterproof Socket		
CHECKED	Fros	2016/09/05			
APPROVED	Ken	2016/09/05	PRODUCT NO.	222A-04001	
	SCALE 1/1	SHEET 2/2	SIZE A4	FILE NAME	222A-04001_B_2