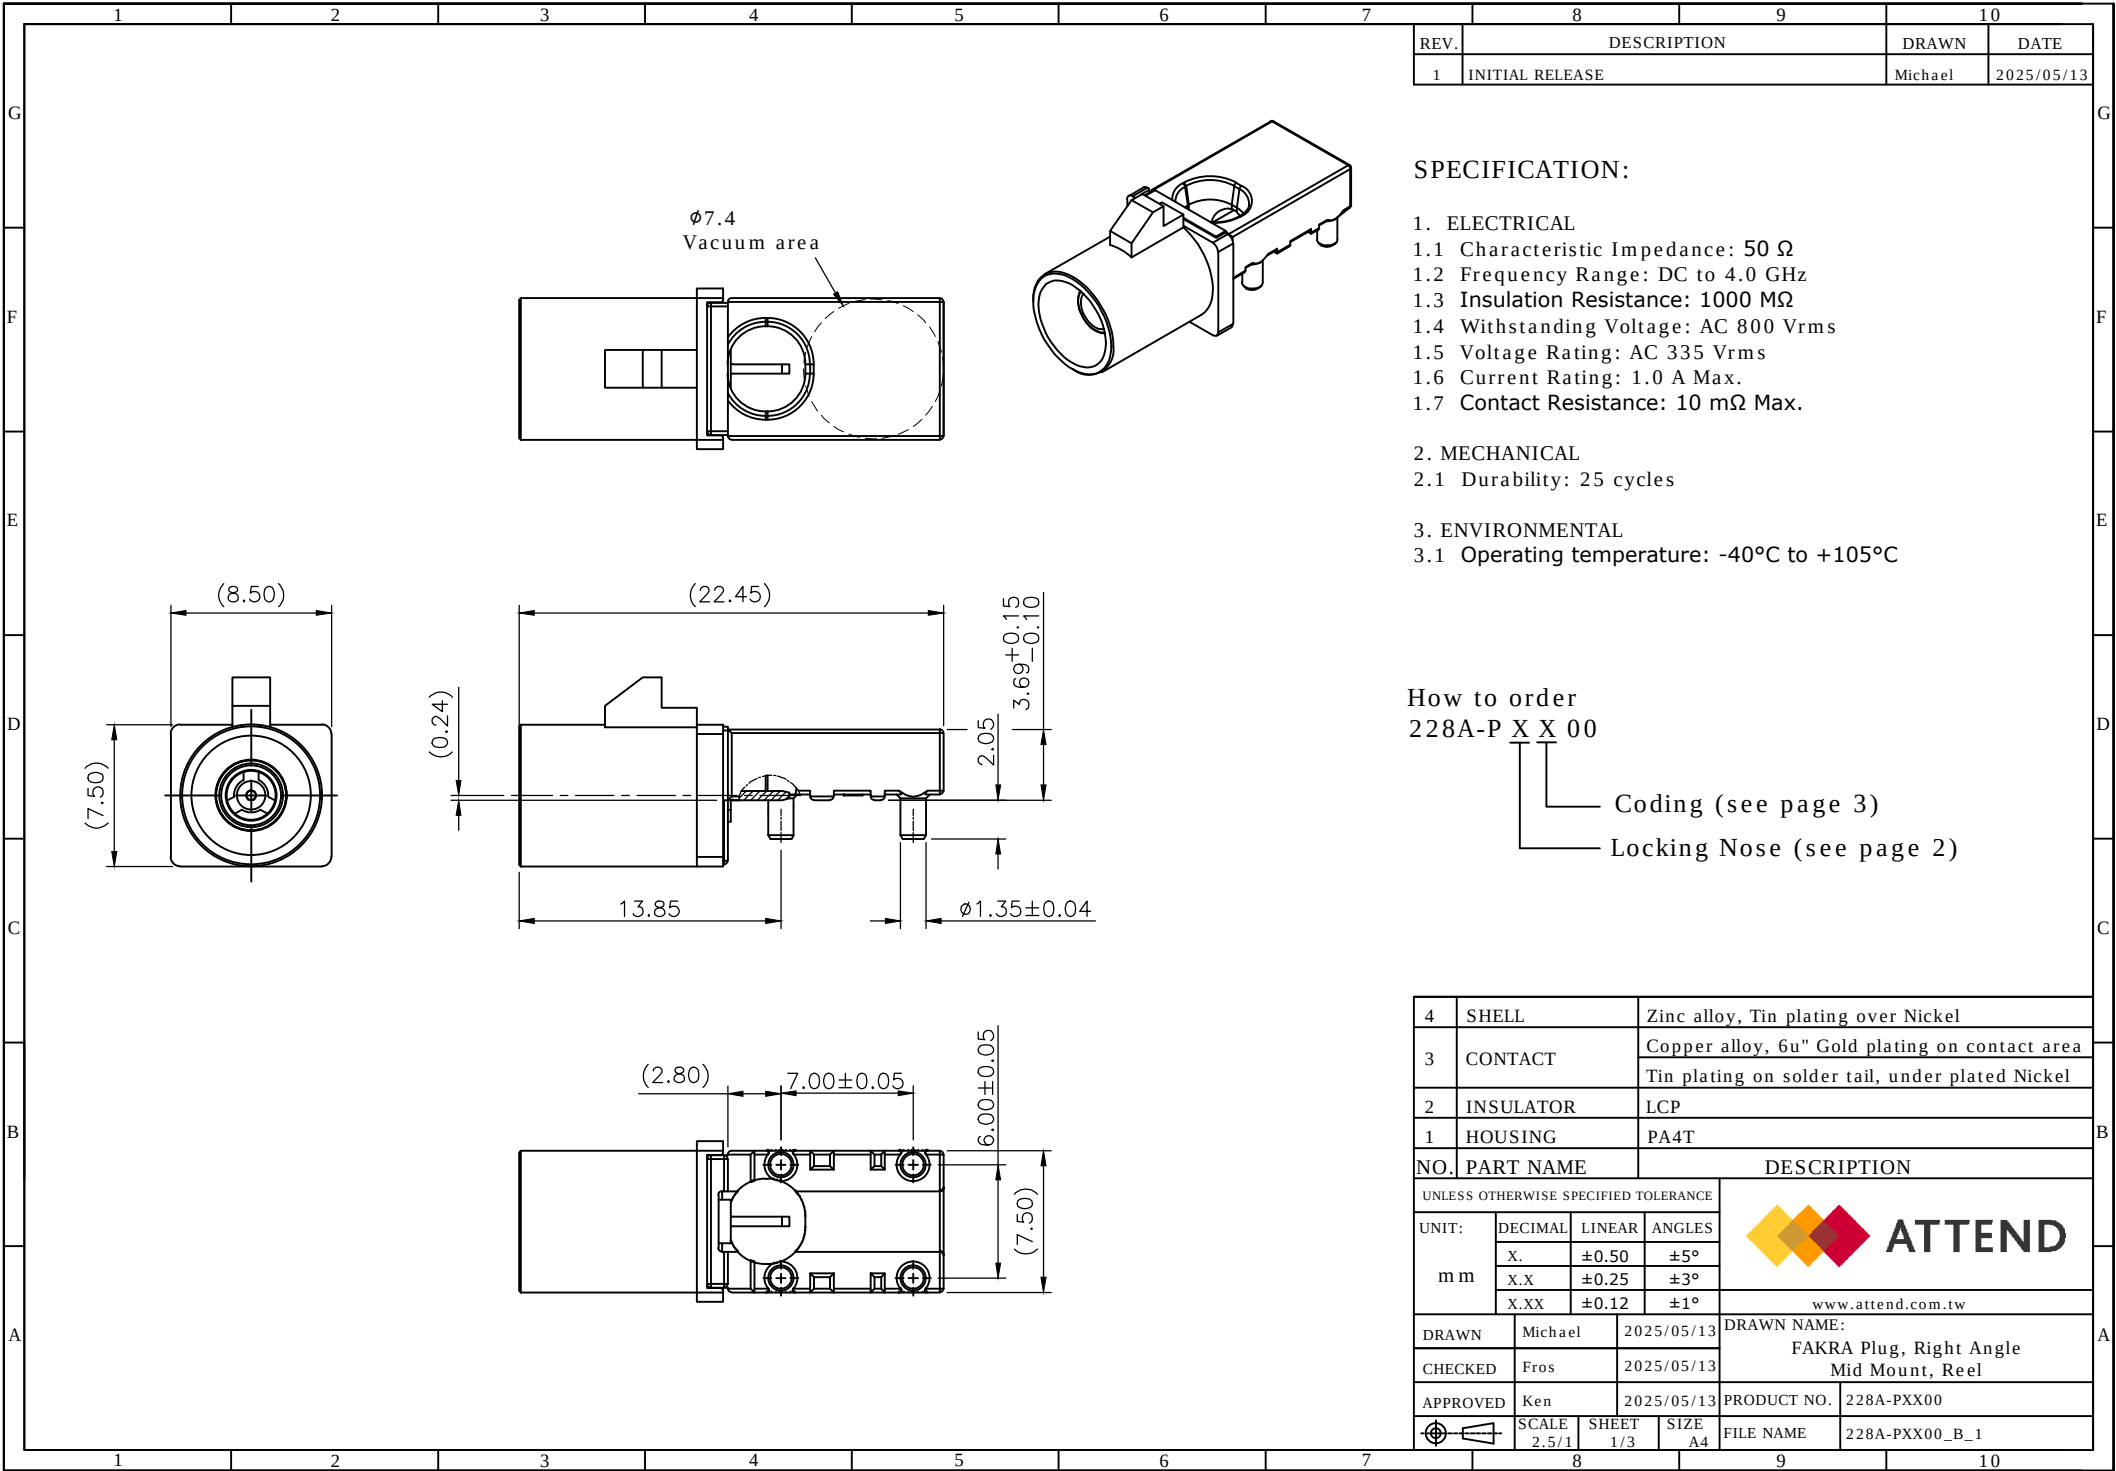




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/05/13

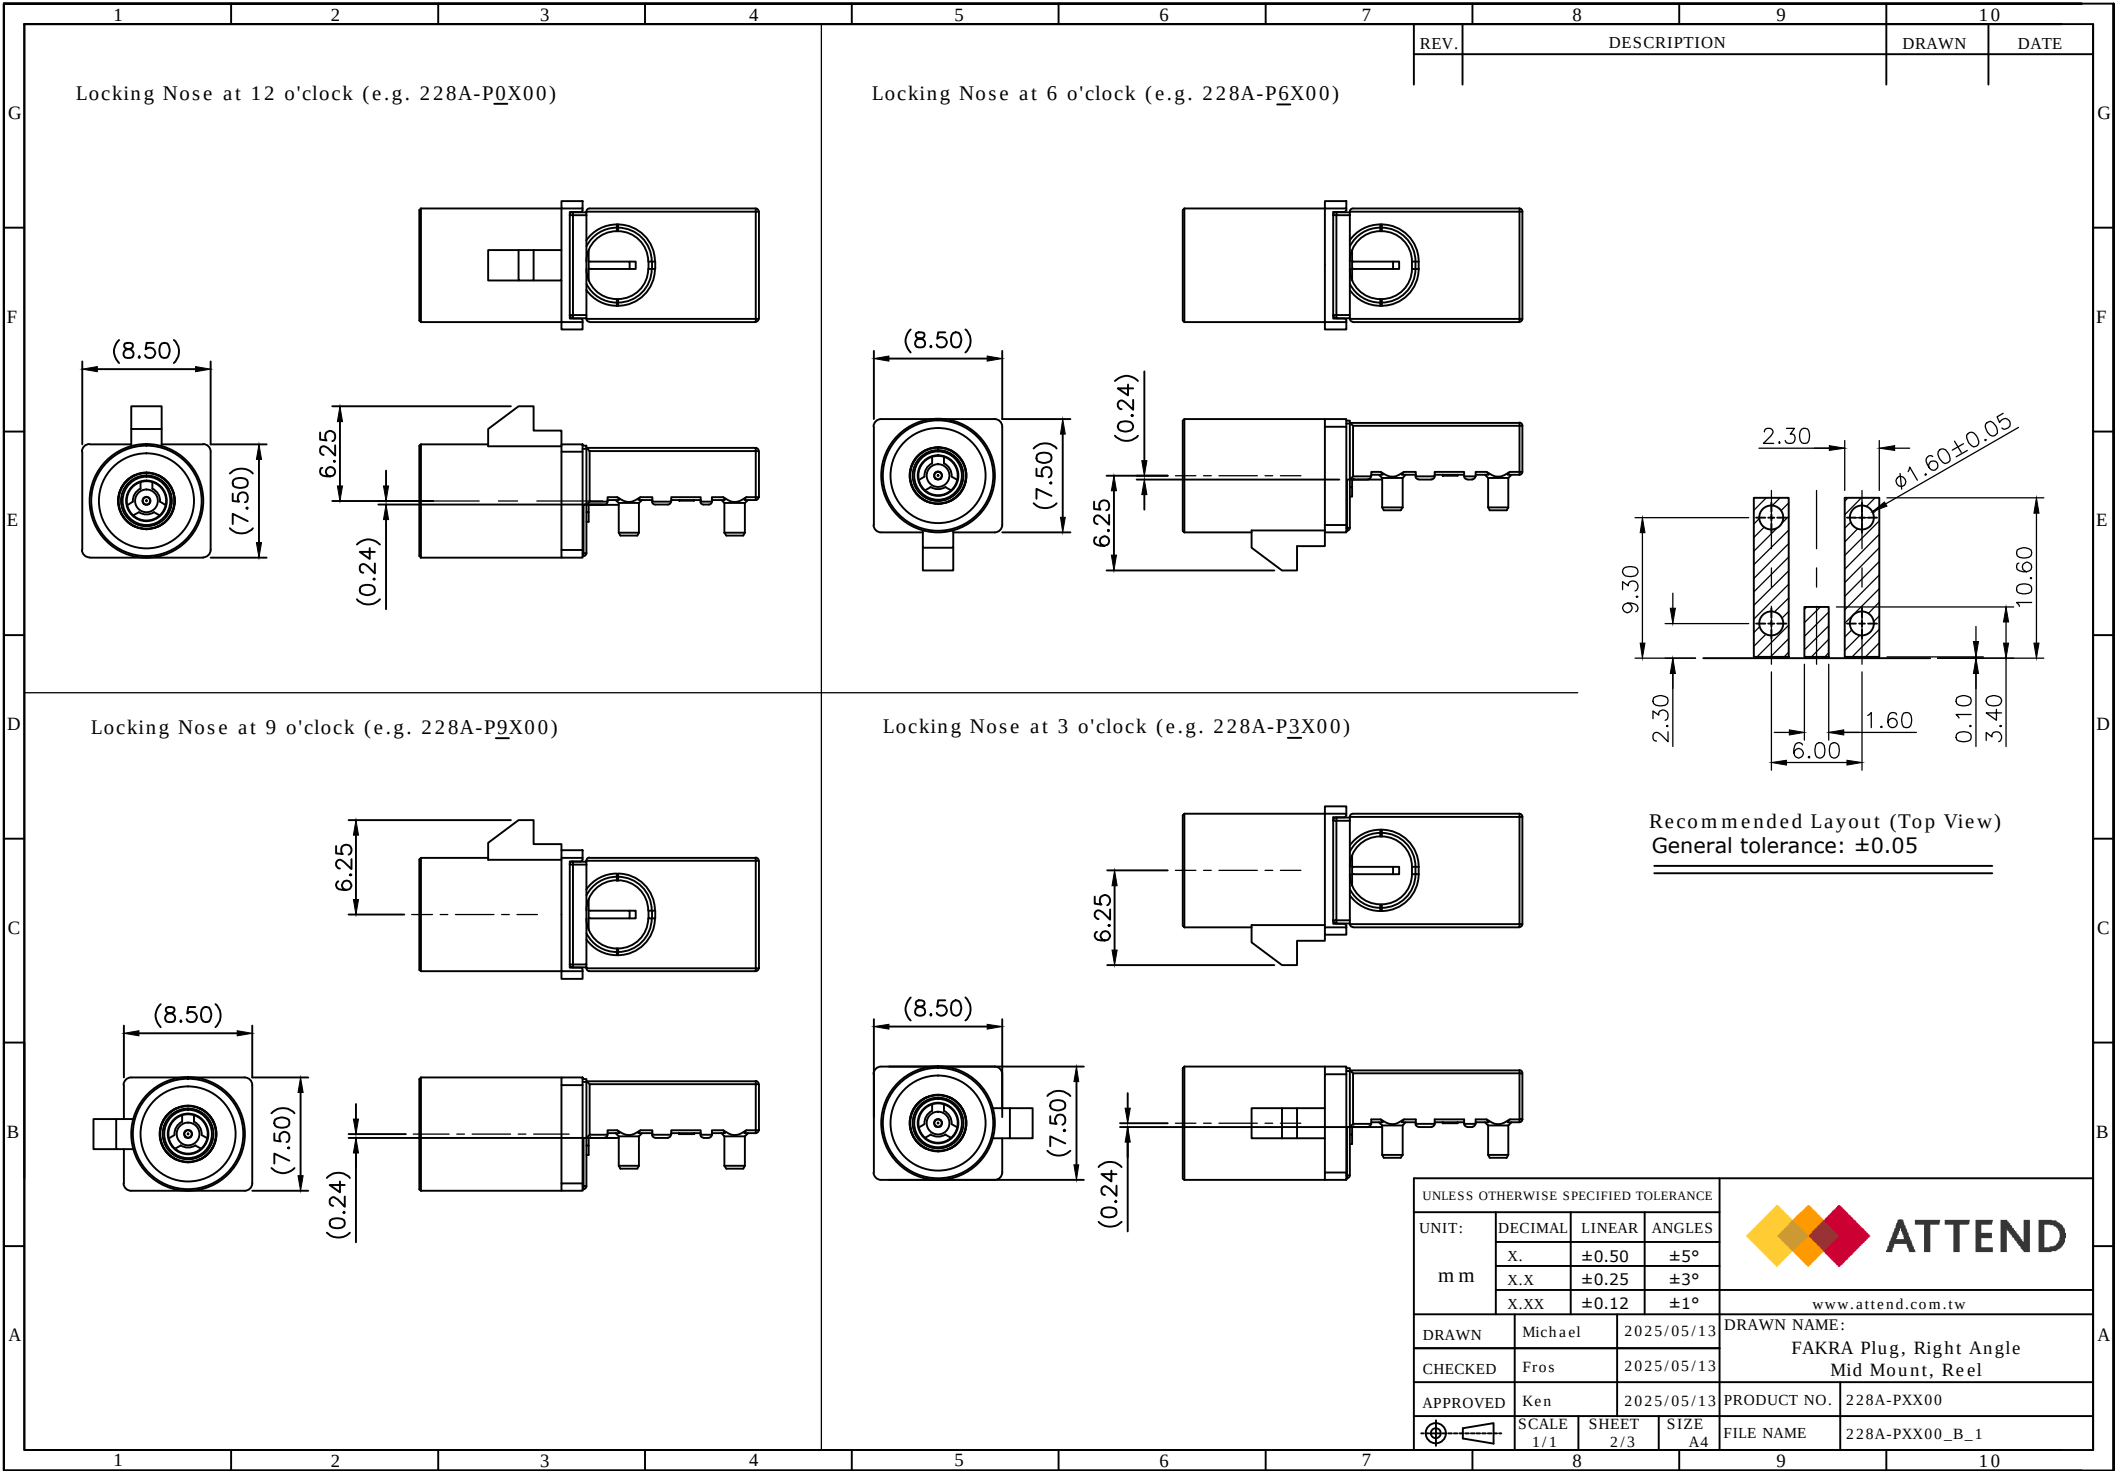
SPECIFICATION:

- ELECTRICAL
 - Characteristic Impedance: 50 Ω
 - Frequency Range: DC to 4.0 GHz
 - Insulation Resistance: 1000 MΩ
 - Withstanding Voltage: AC 800 Vrms
 - Voltage Rating: AC 335 Vrms
 - Current Rating: 1.0 A Max.
 - Contact Resistance: 10 mΩ Max.
- MECHANICAL
 - Durability: 25 cycles
- ENVIRONMENTAL
 - Operating temperature: -40°C to +105°C

How to order
228A-P X X 00

Coding (see page 3)
Locking Nose (see page 2)

4	SHELL	Zinc alloy, Tin plating over Nickel	
3	CONTACT	Copper alloy, 6u" Gold plating on contact area Tin plating on solder tail, under plated Nickel	
2	INSULATOR	LCP	
1	HOUSING	PA4T	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
m m			 ATTEND www.attend.com.tw
DRAWN	Michael	2025/05/13	DRAWN NAME: FAKRA Plug, Right Angle Mid Mount, Reel
CHECKED	Fros	2025/05/13	
APPROVED	Ken	2025/05/13	PRODUCT NO. 228A-PXX00
	SCALE 2.5/1	SHEET 1/3	SIZE A4
FILE NAME		228A-PXX00_B_1	



UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
m m	X.	± 0.50	$\pm 5^\circ$
	X.X	± 0.25	$\pm 3^\circ$
	X.XX	± 0.12	$\pm 1^\circ$
DRAWN	Michael	2025/05/13	
CHECKED	Fros	2025/05/13	
APPROVED	Ken	2025/05/13	
	SCALE 1/1	SHEET 2/3	SIZE A4

















www.attend.com.tw

DRAWN NAME:
FAKRA Plug, Right Angle
Mid Mount, Reel

PRODUCT NO. 228A-PXX00

FILE NAME 228A-PXX00_B_1

Coding Information

CODING	A	B	C	D	E	F	G
COLOR	BLACK SIMILAR RAL.9005	WHITE SIMILAR RAL.9001	BLUE SIMILAR RAL.5005	BORDEAUX VIOLET SIMILAR RAL.4004	GREEN SIMILAR RAL.6002	BROWN SIMILAR RAL.8011	GREY SIMILAR RAL.7031
PLUG							
CODING	H	I	K	L	M	N	Z
COLOR	VIOLET SIMILAR RAL.4003	BEIGE SIMILAR RAL.1001	CURRY SIMILAR RAL.1027	CARMINE RED SIMILAR RAL.3002	PASTEL ORANGE SIMILAR RAL.2003	PASTEL GREEN SIMILAR RAL.6019	WATER BLUE SIMILAR RAL.5021
PLUG							

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
m m				www.attend.com.tw	
DRAWN	Michael	2025/05/13	DRAWN NAME: FAKRA Plug, Right Angle Mid Mount, Reel		
CHECKED	Fros	2025/05/13			
APPROVED	Ken	2025/05/13	PRODUCT NO.	228A-PXX00	
	SCALE N/A	SHEET 3/3	SIZE A4	FILE NAME	228A-PXX00_B_1