
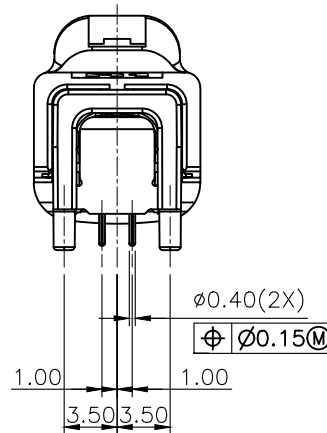
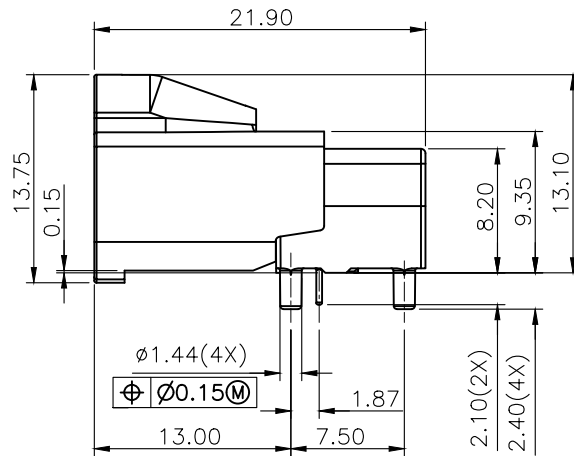




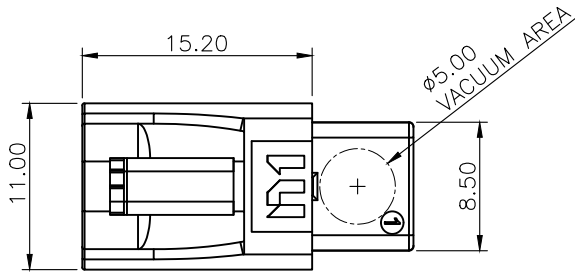

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/08/12

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 1.5A per pin
- 1.2 Voltage Rating: 60V AC/DC
- 1.3 Contact Resistance: 10mΩ
- 1.4 Insulation Resistance: 100MΩ
- 1.5 Dielectric Withstanding Voltage: 250VAC
- 1.6 Impedance: 100Ω
- 1.7 Frequency: 10 GHz

2. MECHANICAL

- 2.1 Durability: 25 Cycle

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+105°C
- 3.2 Storage temperature range: -40°C~+105°C

4. SOLDER ABILITY

- 4.1 Recommended Wave Soldering Temperature: 260°

How to order

232A- P 0 Z 00


- Z: Z Code
- 0: Right angel 0 o'clock
- P: Plug

5	GROUND PIN	Copper alloy, tin plating over nickel
4	OUTER-CNT	Zinc alloy, tin plating over nickel
3	CONTACT	Copper alloy, 6u" gold on contact area, tin plating on solder tails, under plating nickel over all
2	INNER-HSG	Thermoplastic, black
1	HOUSING	PA, UL94V-0, Black

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN		Fros	2025/08/12
CHECKED		Tim	2025/08/12
APPROVED		Ken	2025/08/12
SCALE		2/1	SHEET 1/3
SIZE		A4	FILE NAME
DRAWN NAME:		HS-MTP Plug, 1x1 Port, Right Angle	
PRODUCT NO.		232A-P0X00	
FILE NAME		232A-P0X00_B_1	




www.attend.com.tw



							REV.	DESCRIPTION		DRAWN	DATE

	A	B	C	D	E	F	G
CODING							
	H	J	K	L	M	O	Z
CODING							

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				www.attend.com.tw	
DRAWN	Fros		2025/08/12	DRAWN NAME: HS-MTP Plug, 1x1 Port, Right Angle	
CHECKED	Tim		2025/08/12		
APPROVED	Ken		2025/08/12	PRODUCT NO.	232A-P0X00
	SCALE 2.5/1	SHEET 3/3	SIZE A4	FILE NAME	232A-P0X00_B_1

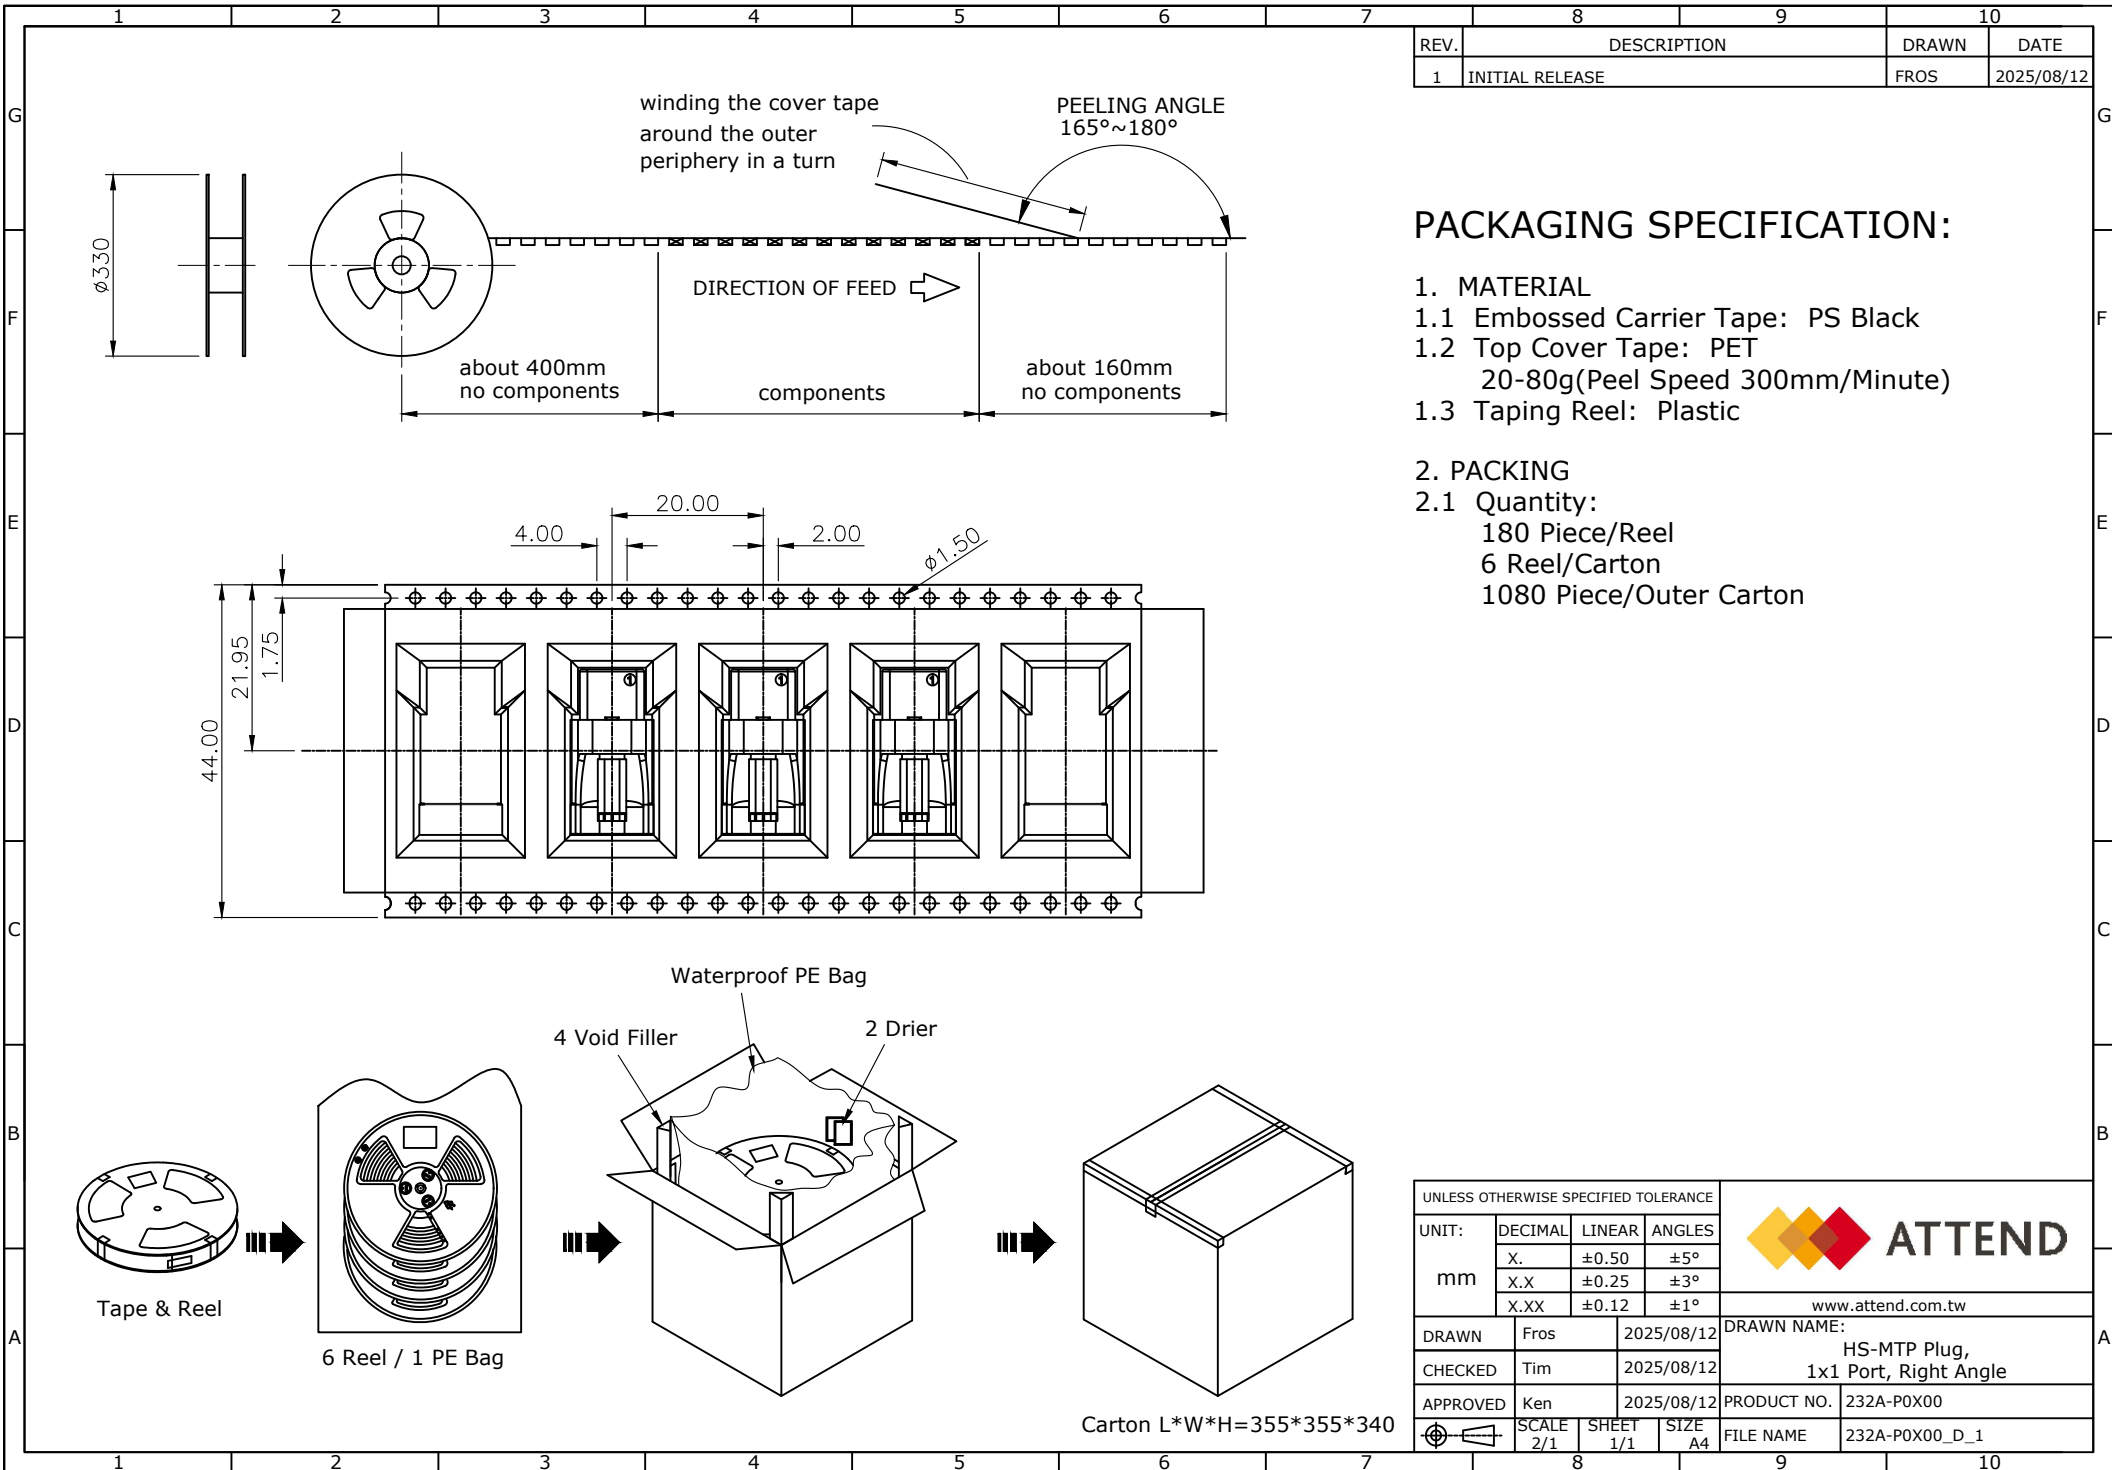

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/08/12

PACKAGING SPECIFICATION:

1. MATERIAL
- 1.1 Embossed Carrier Tape: PS Black
 - 1.2 Top Cover Tape: PET
20-80g(Peel Speed 300mm/Minute)
 - 1.3 Taping Reel: Plastic
2. PACKING
- 2.1 Quantity:
180 Piece/Reel
6 Reel/Carton
1080 Piece/Outer Carton

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
					www.attend.com.tw	
DRAWN		Fros		2025/08/12	DRAWN NAME: HS-MTP Plug, 1x1 Port, Right Angle	
CHECKED		Tim		2025/08/12		
APPROVED		Ken		2025/08/12	PRODUCT NO. 232A-P0X00	
		SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 232A-P0X00_D_1	