


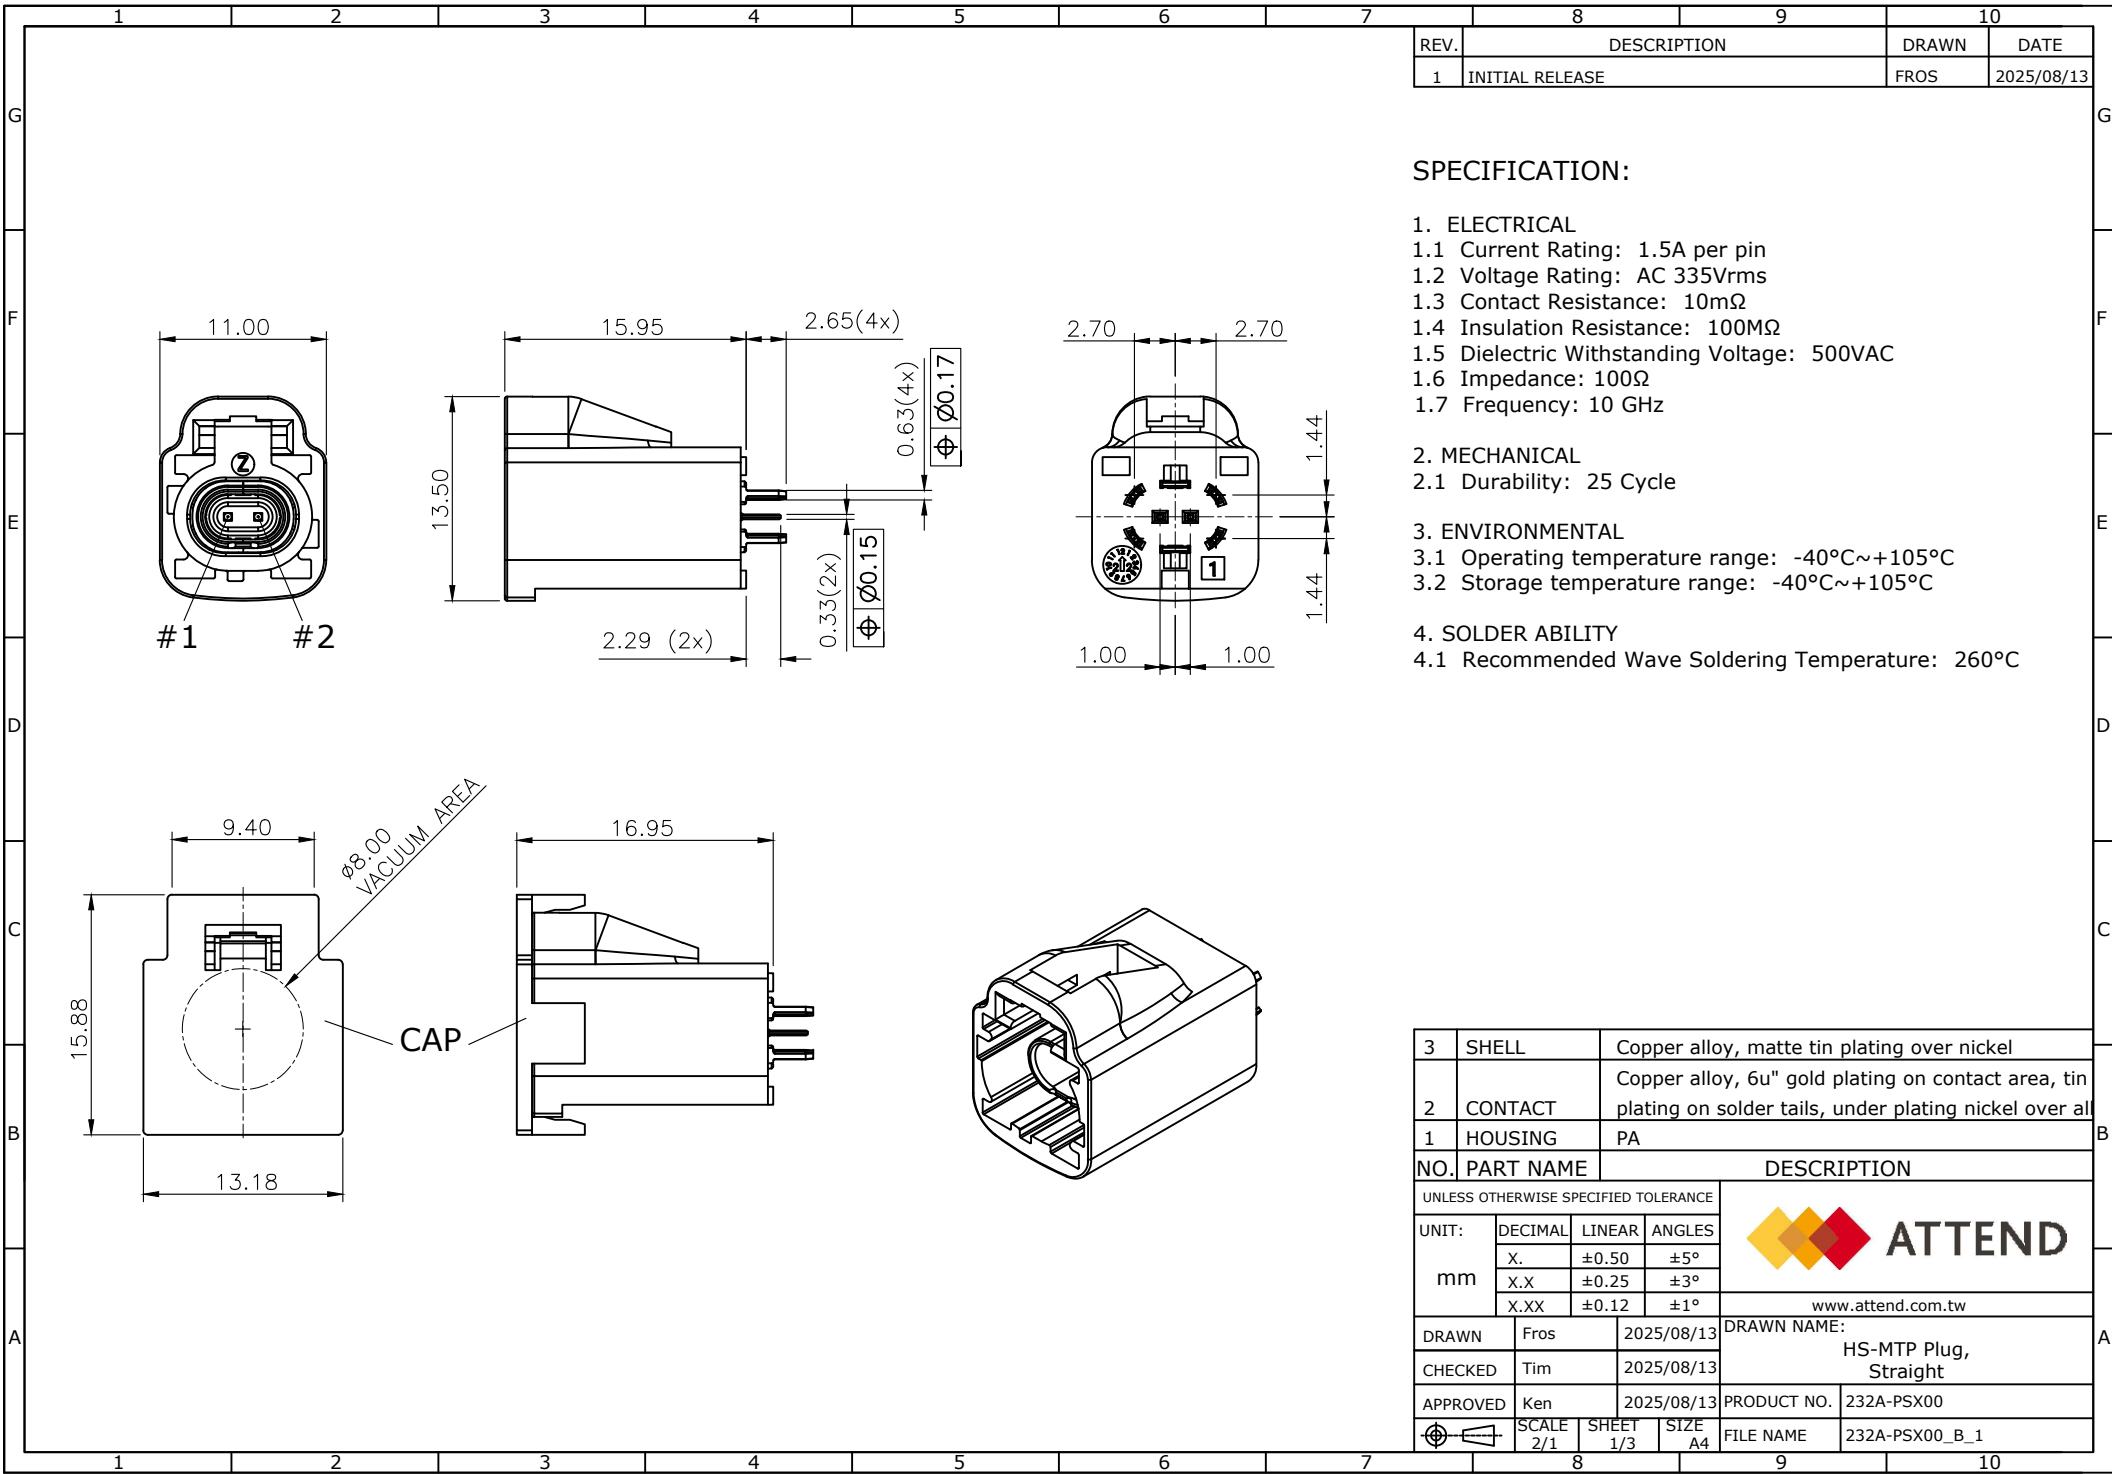


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/08/13

SPECIFICATION:

- ELECTRICAL
 - Current Rating: 1.5A per pin
 - Voltage Rating: AC 335Vrms
 - Contact Resistance: 10m Ω
 - Insulation Resistance: 100M Ω
 - Dielectric Withstanding Voltage: 500VAC
 - Impedance: 100 Ω
 - Frequency: 10 GHz
- MECHANICAL
 - Durability: 25 Cycle
- ENVIRONMENTAL
 - Operating temperature range: -40°C~+105°C
 - Storage temperature range: -40°C~+105°C
- SOLDER ABILITY
 - Recommended Wave Soldering Temperature: 260°C

3	SHELL	Copper alloy, matte tin plating over nickel	
2	CONTACT	Copper alloy, 6u" gold plating on contact area, tin plating on solder tails, under plating nickel over all	
1	HOUSING	PA	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT: mm	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			www.attend.com.tw
DRAWN	Fros	2025/08/13	DRAWN NAME: HS-MTP Plug, Straight
CHECKED	Tim	2025/08/13	
APPROVED	Ken	2025/08/13	PRODUCT NO. 232A-PSX00
	SCALE	SHEET	SIZE
	2/1	1/3	A4
FILE NAME		232A-PSX00_B_1	

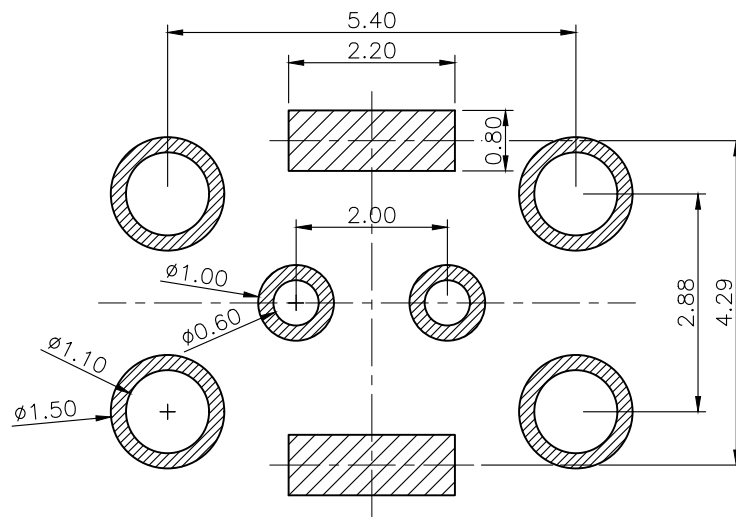

Recommended Layout (top view)
General Tolerance: $\pm 0.05\text{mm}$

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
					www.attend.com.tw	
DRAWN	Fros		2025/08/13	DRAWN NAME: HS-MTP Plug, Straight		
CHECKED	Tim		2025/08/13			
APPROVED	Ken		2025/08/13	PRODUCT NO.	232A-PSX00	
	SCALE 10/1	SHEET 2/3	SIZE A4	FILE NAME	232A-PSX00_B_1	

							REV.	DESCRIPTION		DRAWN	DATE

