

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/08/07

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 1.5A per pin
- 1.2 Voltage Rating: 60V AC/DC
- 1.3 Contact Resistance: 10mΩ
- 1.4 Insulation Resistance: 100MΩ
- 1.5 Dielectric Withstanding Voltage: 250VAC
- 1.6 Impedance: 100Ω
- 1.7 Frequency: 10 GHz

2. MECHANICAL

- 2.1 Durability: 25 Cycle

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+105°C
- 3.2 Storage temperature range: -40°C~+105°C

4. SOLDER ABILITY





- 4.1 Recommended Wave Soldering Temperature: 260°


How to order

232D- P 0 Z 00

Z: Z Code
0: Right angel 0 o'clock
P: Plug


5	GROUND PIN	Copper alloy, tin plating over nickel			
4	OUTER-CNT	Zinc alloy, tin plating over nickel			
3	CONTACT	Copper alloy, 6u" gold on contact area, tin plating on solder tails, under plating nickel over all			
2	INNER-HSG	Thermoplastic, black			
1	HOUSING	PA, UL94V-0, Black			
NO. PART NAME		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		ATTEND www.attend.com.tw			
UNIT: mm	DECIMAL			LINEAR	ANGLES
	X.			±0.50	±5°
	X.X			±0.25	±3°
	X.XX			±0.12	±1°
DRAWN	Fros	2025/08/07	DRAWN NAME:		
CHECKED	Tim	2025/08/07	HS-MTP Plug, 2x3 Port, Right Angle		
APPROVED	Ken	2025/08/07	PRODUCT NO.	232D-P0X00	
	SCALE 1.6/1	SHEET 1/3	SIZE A4	FILE NAME	232D-P0X00_B_1

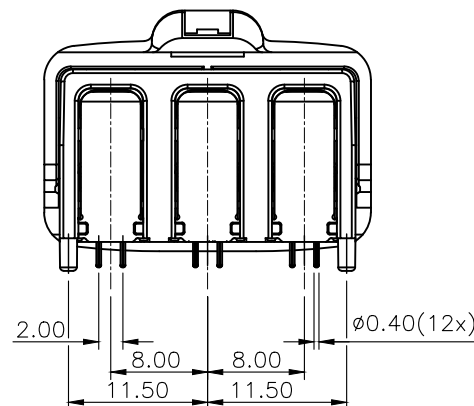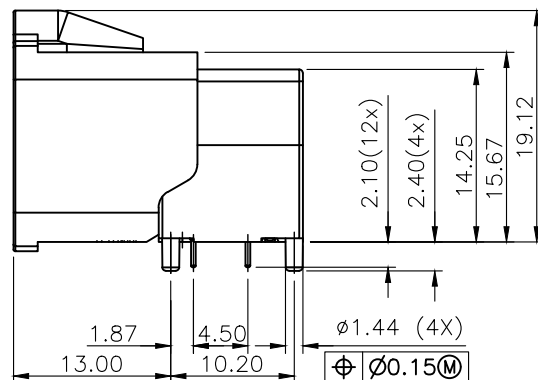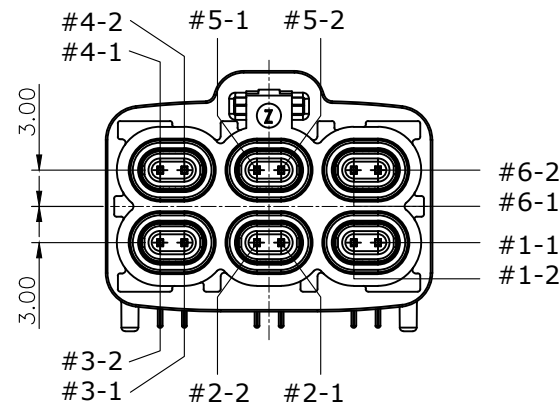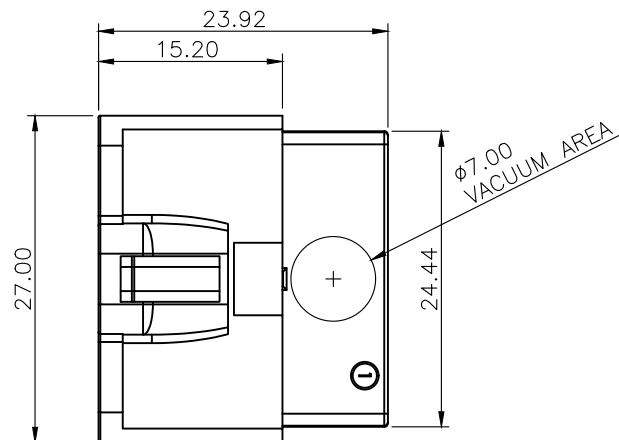

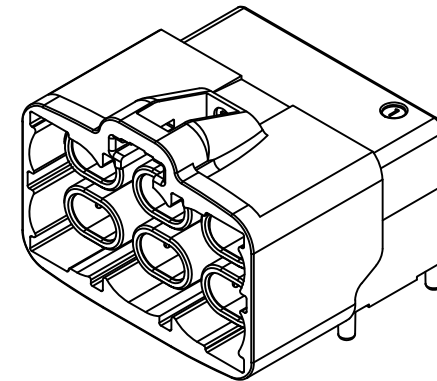[illegible]

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw		
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Fros	2025/08/07	DRAWN NAME: HS-MTP Plug, 2x3 Port, Right Angle			
CHECKED	Tim	2025/08/07				
APPROVED	Ken	2025/08/07				
		SCALE 4/1	SHEET 2/3	SIZE A4	PRODUCT NO. 232D-P0X00	
				FILE NAME	232D-P0X00_B_1	

							REV.	DESCRIPTION		DRAWN	DATE
CODING	A	B	C	D	E	F	G				
CODING	H	J	K	L	M	O	Z				

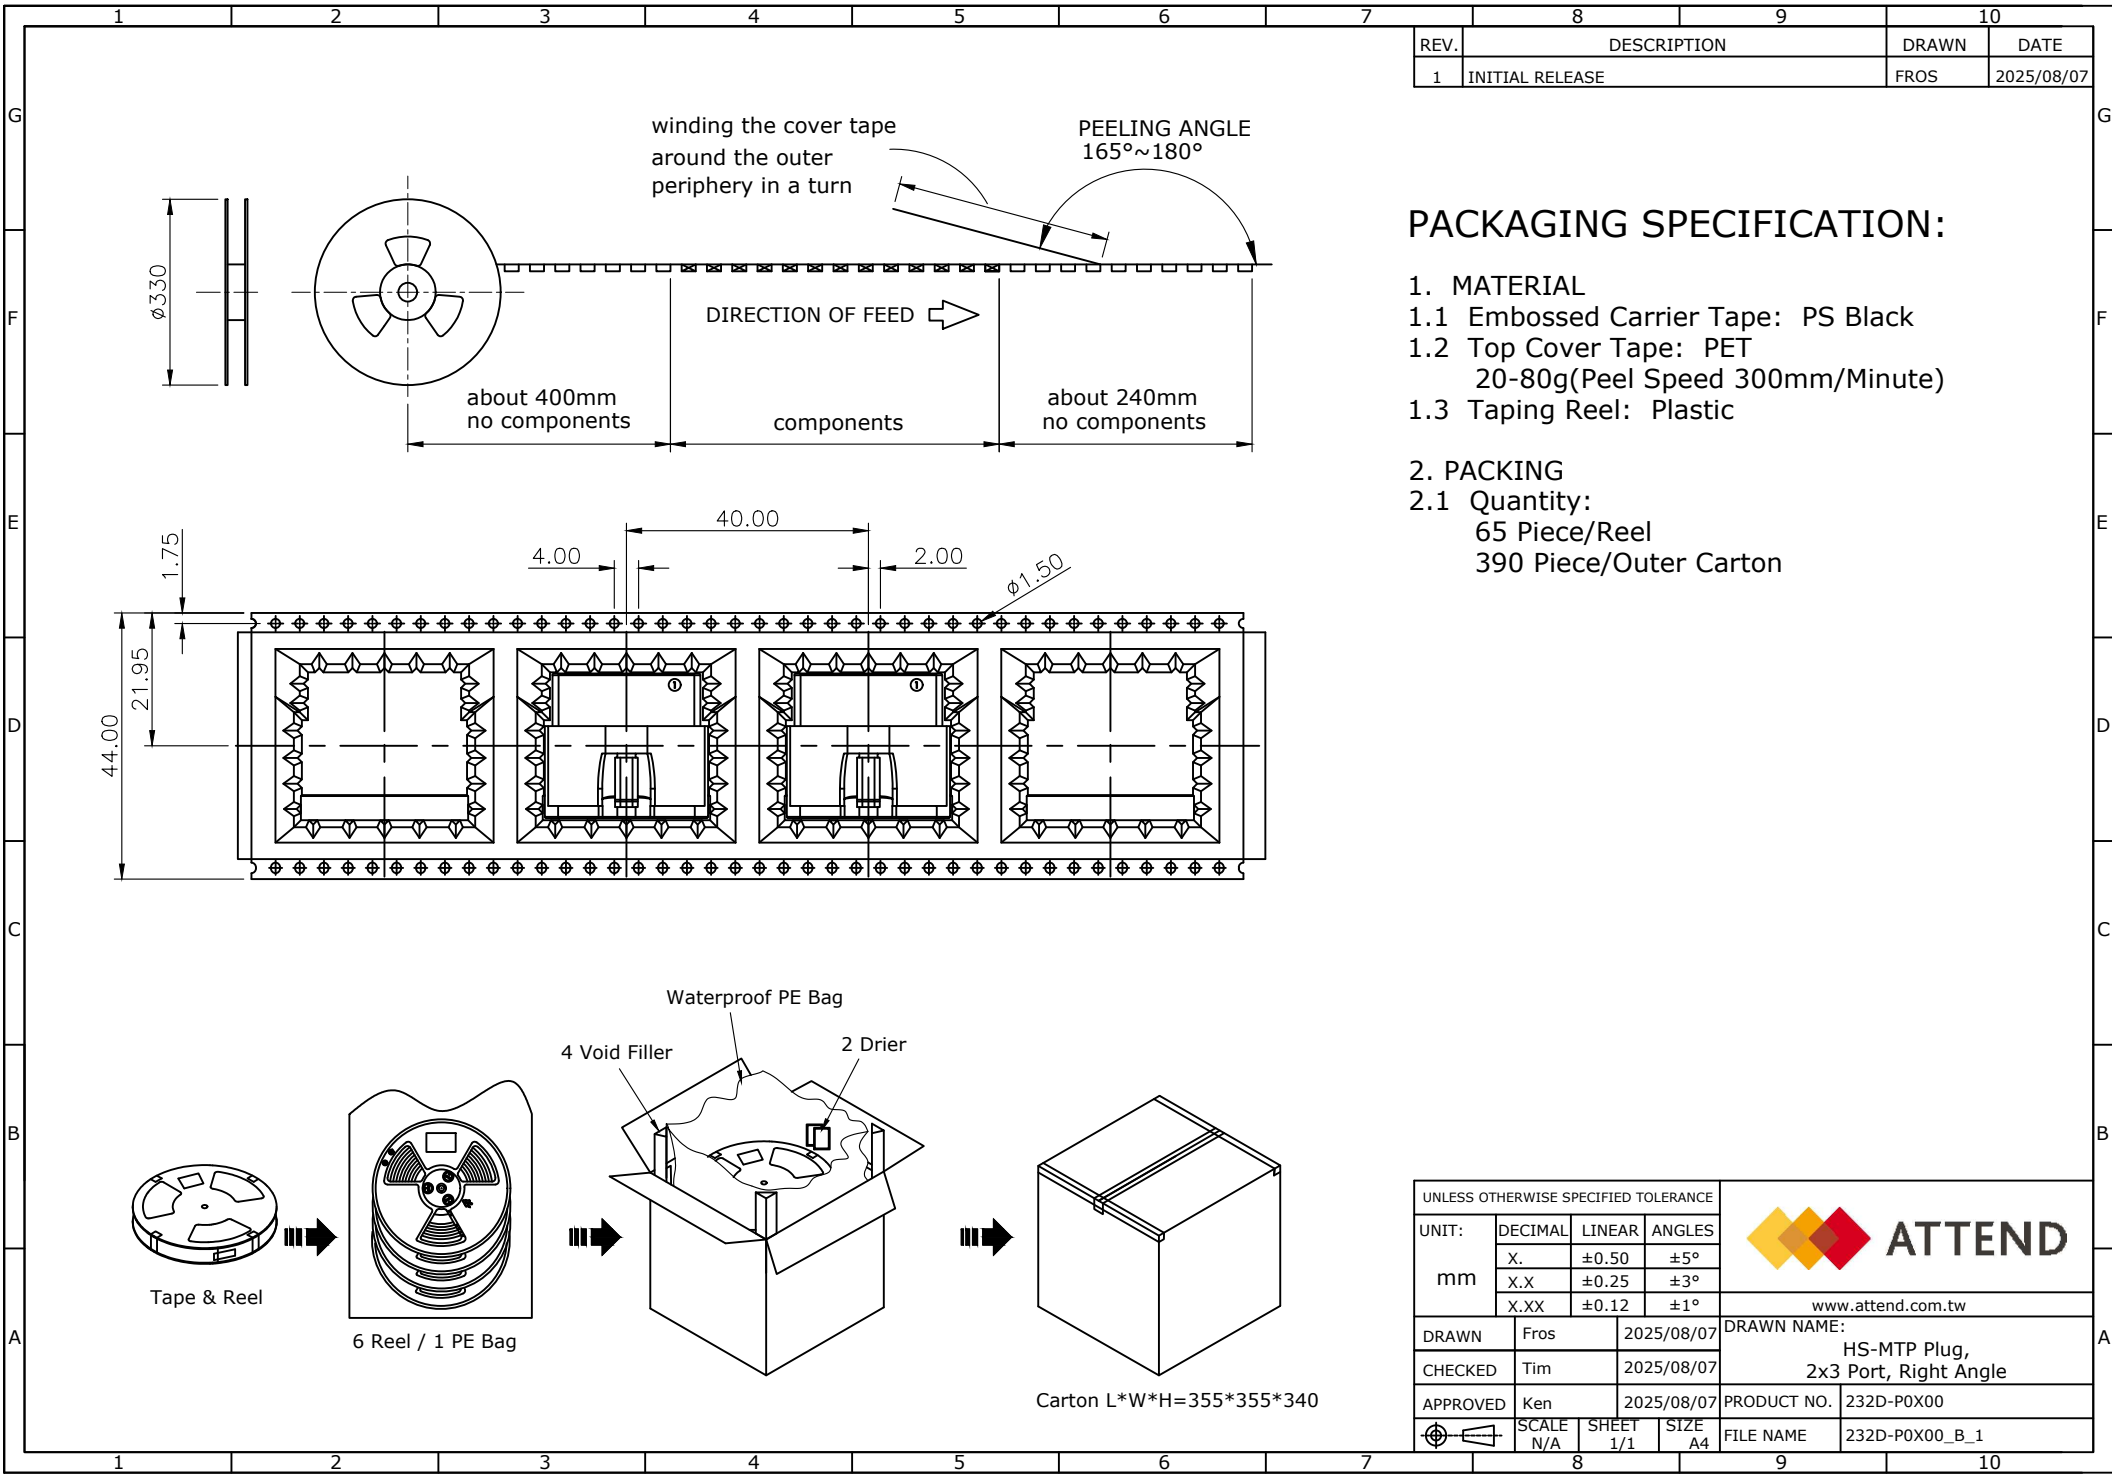

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/08/07

PACKAGING SPECIFICATION:

1. MATERIAL
- 1.1 Embossed Carrier Tape: PS Black
 - 1.2 Top Cover Tape: PET 20-80g(Peel Speed 300mm/Minute)
 - 1.3 Taping Reel: Plastic
2. PACKING
- 2.1 Quantity: 65 Piece/Reel 390 Piece/Outer Carton

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
					www.attend.com.tw	
DRAWN		Fros	2025/08/07		DRAWN NAME: HS-MTP Plug, 2x3 Port, Right Angle	
CHECKED		Tim	2025/08/07			
APPROVED		Ken	2025/08/07		PRODUCT NO. 232D-P0X00	
	SCALE N/A	SHEET 1/1	SIZE A4		FILE NAME 232D-P0X00_B_1	