

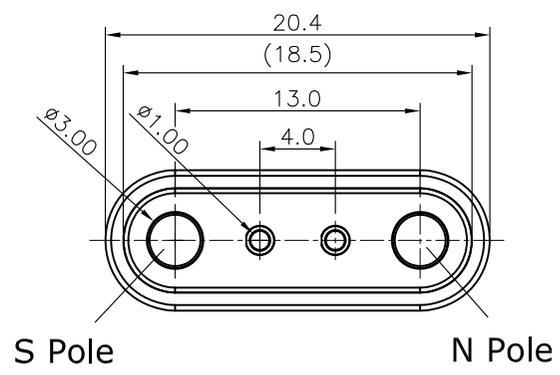
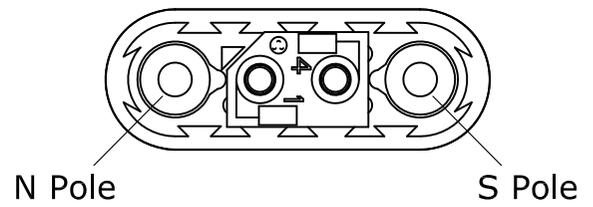


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2022/07/18



**SPECIFICATION:**

1. ELECTRICAL
  - 1.1 Current Rating: 2A
  - 1.2 Voltage Rating: 12VDC
  - 1.3 Contact Resistance: 30mΩ
  - 1.4 When the current is more than 1A, then need to add a delay circuit 3 second
2. MECHANICAL
  - 2.1 Durability: 50,000 Cycle
  - 2.2 Pogo pin contact force: 50g±15g at 1.0mm work stroke, full stroke 1.2mm
3. ENVIRONMENTAL
  - 3.1 Operating temperature range: -30°C~+60°C

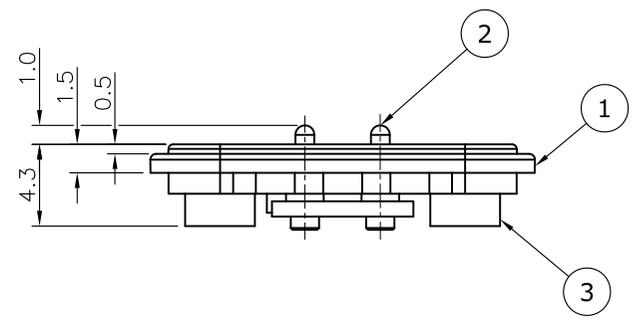

4	GLUE	LSR-67						
3	MAGNET	N52 NdFeB, Ni-Cu-Ni plating						
2	POGO PIN	Brass, 10u" gold plating						
1	HOUSING	PC RAL9003, White						
NO. PART NAME		DESCRIPTION						
UNLESS OTHERWISE SPECIFIED TOLERANCE								
UNIT:	DECIMAL	LINEAR	ANGLES					
mm	X.	±0.50	±5°					
	X.X	±0.25	±3°					
	X.XX	±0.12	±1°					
DRAWN		Tim	2022/07/18	DRAWN NAME: Pogo Pin, Magnet Type, 2Pin H5.3 Pitch 4.0, 10u", White				
CHECKED		Fros	2022/07/18					
APPROVED		Ken	2022/07/18	PRODUCT NO. 303C-281220-40-02				
SCALE		1/1	SHEET	1/1	SIZE	A4	FILE NAME	303C-281220-40-02_B_1



www.attend.com.tw