



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2022/03/10
2	ECR2500007	TIM	2025/07/09




SPECIFICATION:

1. Contact Resistance: 50mΩ
2. Contact Force: 70g±20g at 1.0 working stroke
3. Durability: 50,000 Cycle Min.
4. Operating Temperature Range: -30°C~+60°C
3. Soldering by manual only



303D-L380F04	2A	12VDC	200g
Match P/N	Current	Voltage	Magnetic Adsorption Force

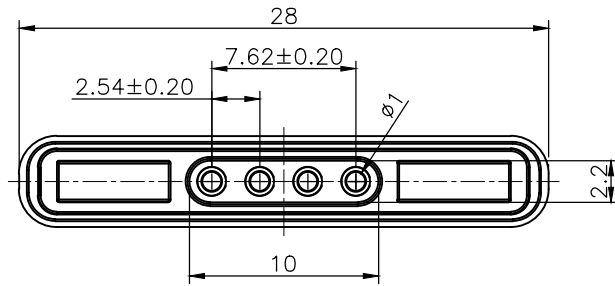

fluttering of pin axis

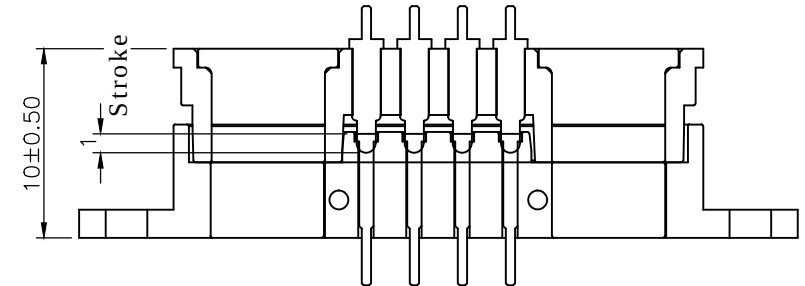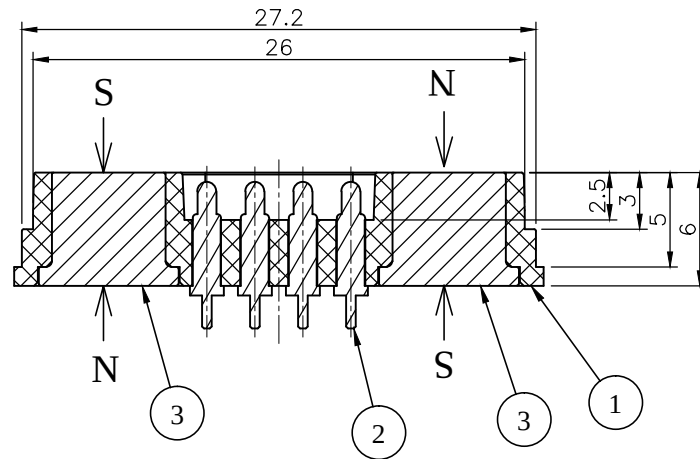

ASSEMBLY

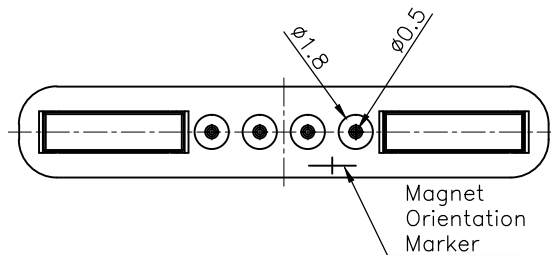

Recommended layout
General tolerance: ±0.05mm

4	GLUE	LSR-67			
3	MAGNET	N52 NdFeB, Nickel plating			
2	POGO PIN	Lead Free Brass, 5u" Gold plating over Nickel			
1	HOUSING	HTN, UL94V-0, Black			
NO. PART NAME		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
 ATTEND			www.attend.com.tw		
DRAWN	Fros	2022/03/10	DRAWN NAME: Pogo Pin Magnetic, 4 Pin 28.0x4.8x6h, 5u", 500g, 2A, Black		
CHECKED	Tim	2022/03/10			
APPROVED	Ken	2022/03/10			
	SCALE 2.5	SHEET 1/1	SIZE A4	PRODUCT NO.	303D-L280M04
				FILE NAME	303D-L280M04_B_2



www.attend.com.tw