


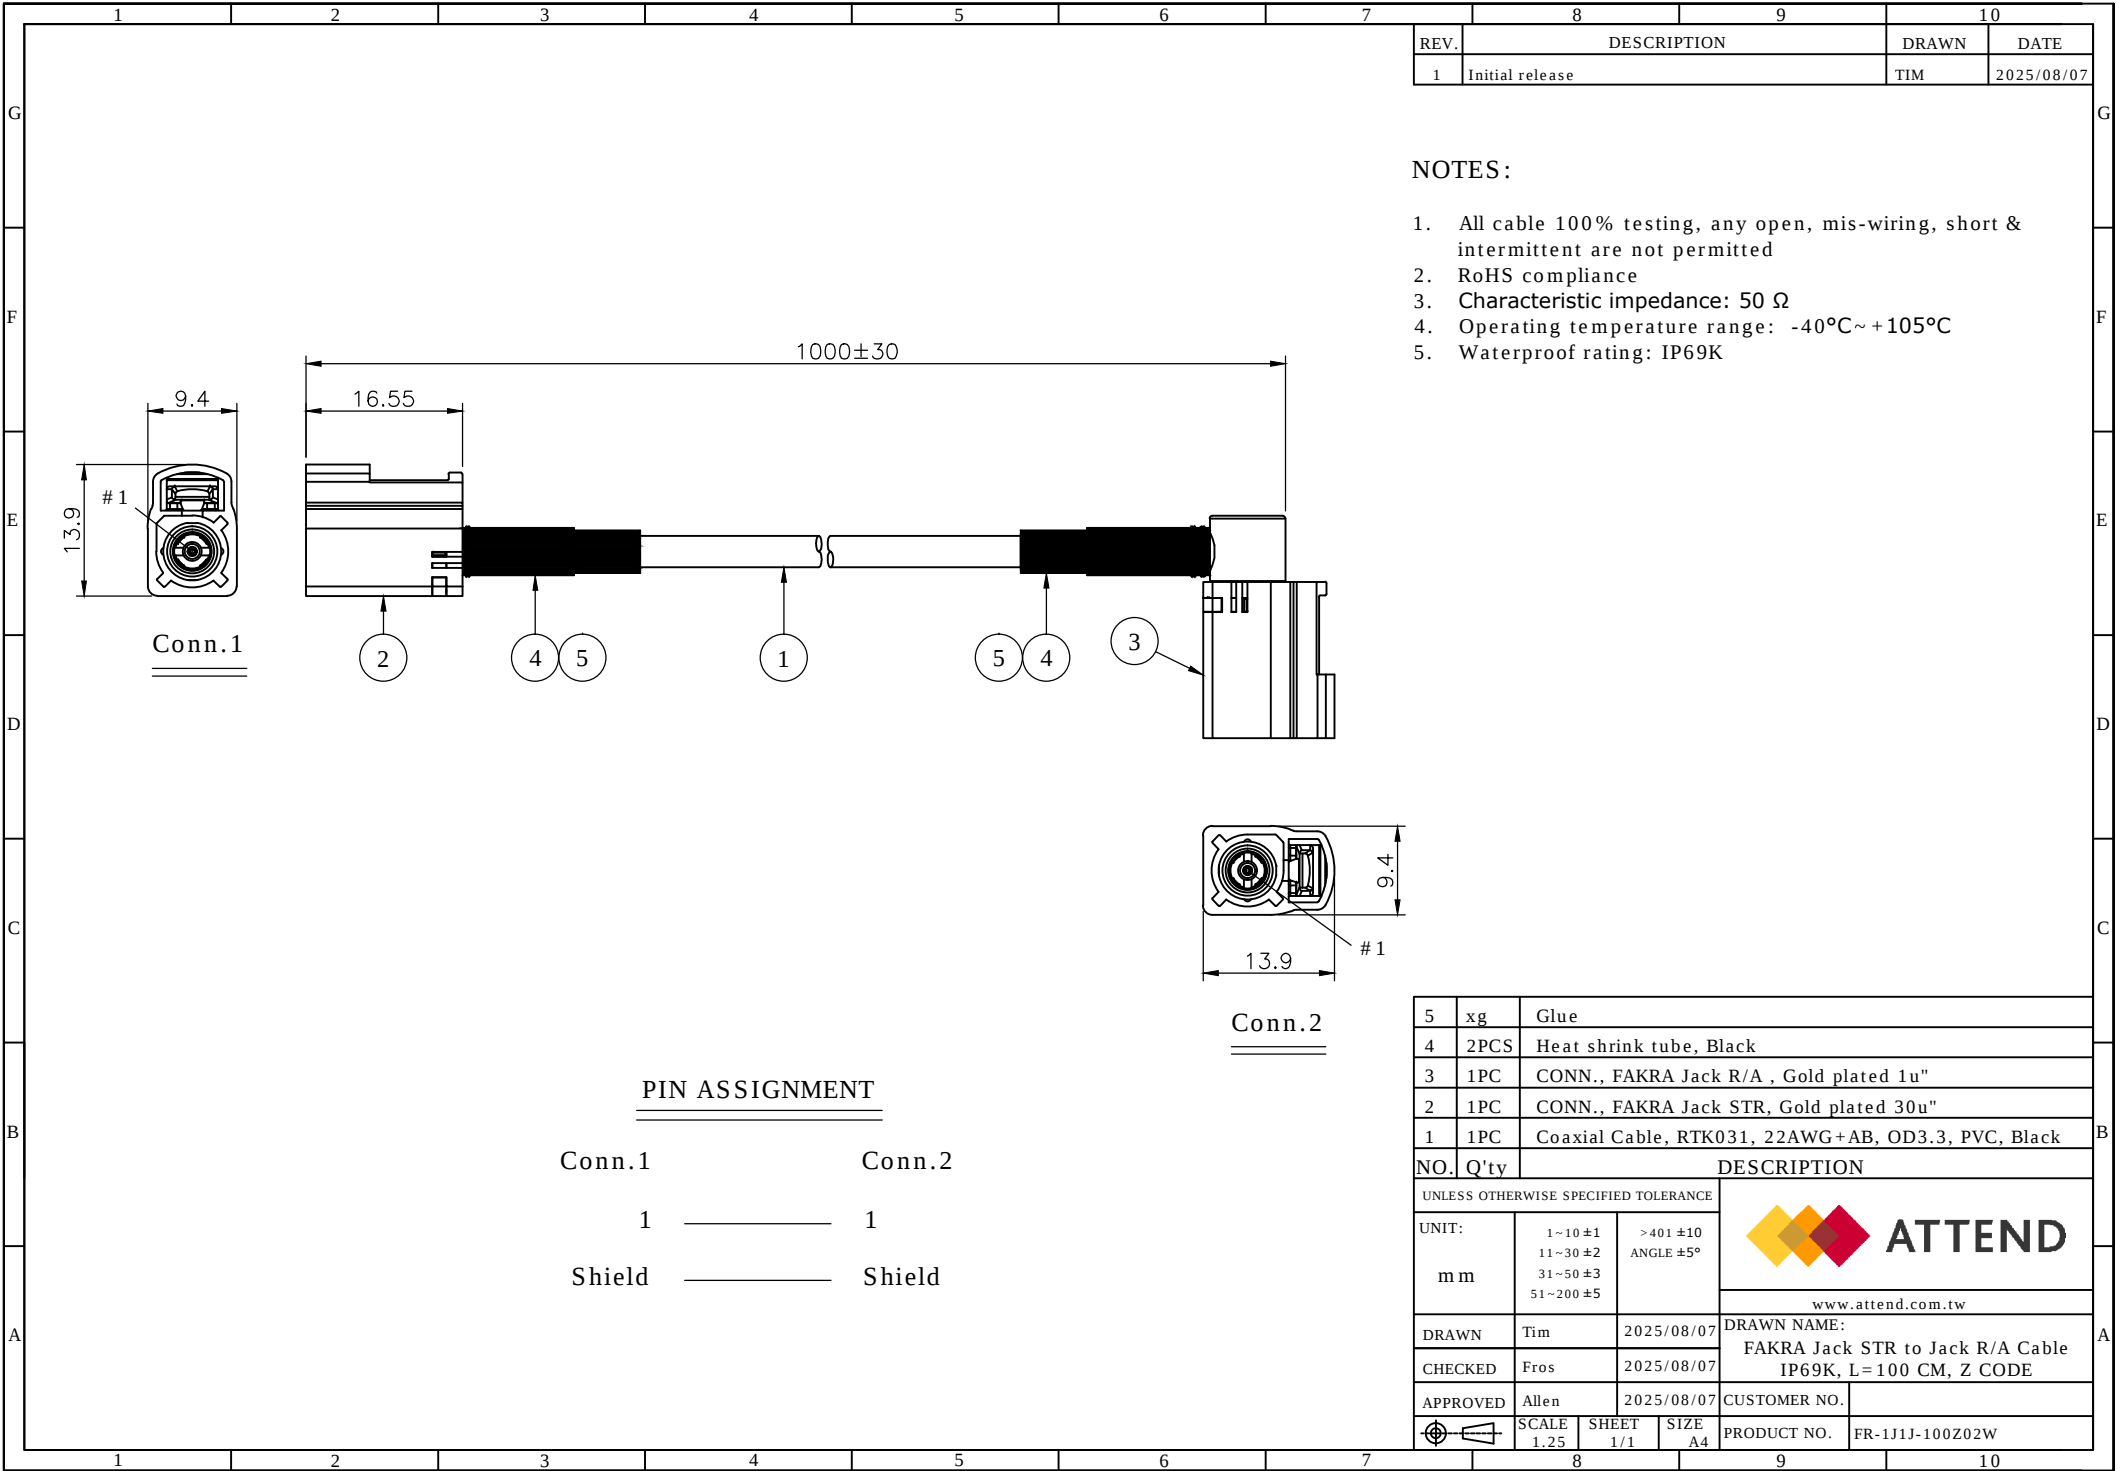

REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/08/07

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. Characteristic impedance: 50 Ω
4. Operating temperature range: -40°C~+105°C
5. Waterproof rating: IP69K

5	xg	Glue
4	2PCS	Heat shrink tube, Black
3	1PC	CONN., FAKRA Jack R/A , Gold plated 1u"
2	1PC	CONN., FAKRA Jack STR, Gold plated 30u"
1	1PC	Coaxial Cable, RTK031, 22AWG+AB, OD3.3, PVC, Black
NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°
m m		
DRAWN	Tim	2025/08/07
CHECKED	Fros	2025/08/07
APPROVED	Allen	2025/08/07
SCALE	1.25	SHEET 1/1
SIZE	A4	
DRAWN NAME:		FAKRA Jack STR to Jack R/A Cable
		IP69K, L=100 CM, Z CODE
CUSTOMER NO.		
PRODUCT NO.		FR-1J1J-100Z02W