


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	Fros	2025/05/08
2	Revised wire spec, open end	Fros	2025/06/19

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

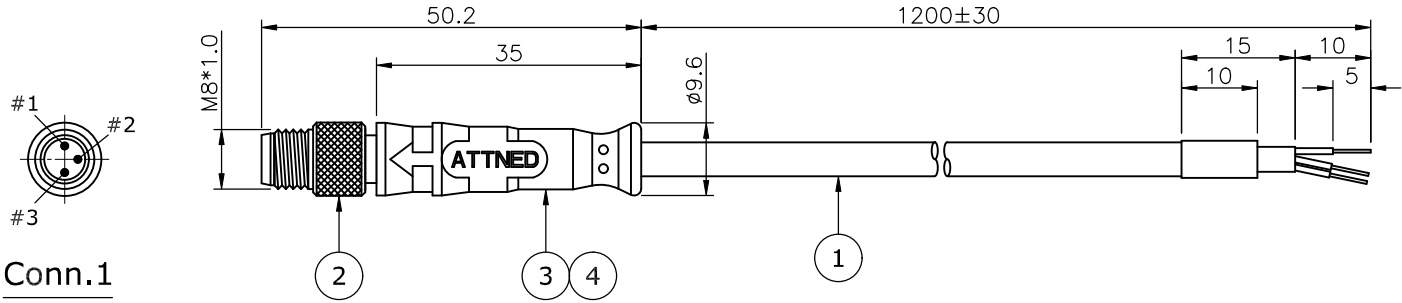

PIN ASSIGNMENT

Conn.1	
1	Red
2	Black
3	Yellow

4	xg	Over Mold, PVC 50P, Black, T/N:HY-HX-0302
3	xg	Inner Mold, PE, T/N:HY-HX-0301
2	1PC	CONN., M8-A Code 3Pin Male, P/N: 219A-03M00
1	1PC	Cable, UL2464 #22AWG x 4C+AL PVC JACKET, OD:4.5, Black
NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°
mm		
DRAWN	Fros	2025/05/08
CHECKED	Allen	2025/05/08
APPROVED	Ken	2025/05/08
SCALE	1/1	SHEET 1/1
SIZE	A4	PRODUCT NO. M8-3P00-12001



www.attend.com.tw

DRAWN NAME:
M8 A-code 3pin male to open end
L=120 CM

CUSTOMER NO.