


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	Fros	2025/05/08
2	Revised wire spec, open end	Fros	2025/06/19

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

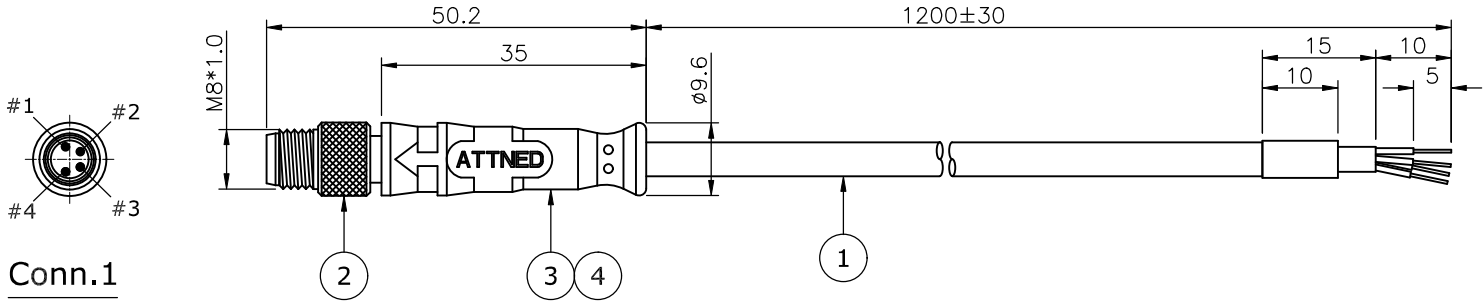

PIN ASSIGNMENT

Conn.1

- | | |
|---|--------|
| 1 | Red |
| 2 | Black |
| 3 | Yellow |
| 4 | Green |

4	xg	Over Mold, PVC 50P, Black, T/N:HY-HX-0302			
3	xg	Inner Mold, PE, T/N:HY-HX-0301			
2	1PC	CONN., M8-A Code 4Pin Male, P/N: 219A-04MO0			
1	1PC	Cable, UL2464 #22AWG x 4C+AL PVC JACKET, OD:4.5, Black			
NO. Q'ty		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:		ATTEND www.attend.com.tw			
mm	1~10 ±1				>401 ±10 ANGLE ±5°
	11~30 ±2				
	31~50 ±3				
	51~200 ±5				
DRAWN	Fros	2025/05/08	DRAWN NAME:		
CHECKED	Allen	2025/05/08	M8 A-code 4pin male to open end L=120 CM		
APPROVED	Ken	2025/05/08	CUSTOMER NO.		
	SCALE	SHEET	SIZE	PRODUCT NO.	
	1/1	1/1	A4		
			M8-4P00-12001		