


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	Fros	2025/05/08
2	Revised wire spec, open end	Fros	2025/06/19

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

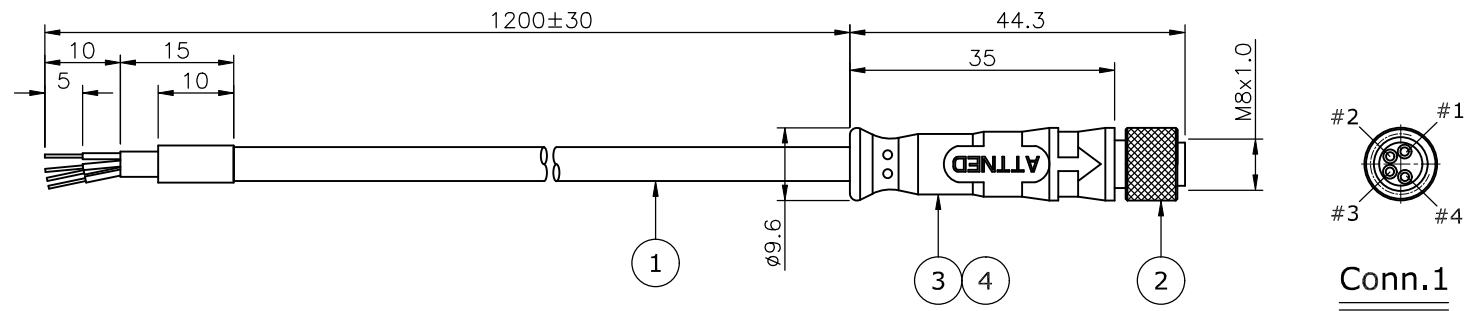

PIN ASSIGNMENT

Conn.1

- | | |
|---|--------|
| 1 | Red |
| 2 | Black |
| 3 | Yellow |
| 4 | Green |

4	xg	Over Mold, PVC 50P, Black, T/N:HY-HX-0304			
3	xg	Inner Mold, PE, T/N:HY-HX-0303			
2	1PC	CONN., M8-A Code 4Pin Female, P/N: 219A-04FO0			
1	1PC	Cable, UL2464 #22AWG x 4C+AL PVC JACKET, OD:4.5, Black			
NO. Q'ty		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		ATTEND www.attend.com.tw			
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5				
mm	>401 ±10 ANGLE ±5°				
DRAWN	Fros	2025/05/08	DRAWN NAME: M8 A-code 4pin Female to open end L=120 CM		
CHECKED	Allen	2025/05/08			
APPROVED	Ken	2025/05/08	CUSTOMER NO.		
	SCALE N/A	SHEET 1/1	SIZE A4	PRODUCT NO.	M8-4R00-12001