




| REV. | DESCRIPTION     | DRAWN | DATE       |
|------|-----------------|-------|------------|
| 1    | Initial release | TIM   | 2025/08/07 |

#### NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. Characteristic impedance: 100  $\Omega$
4. Operating temperature range: -40°C~+105°C

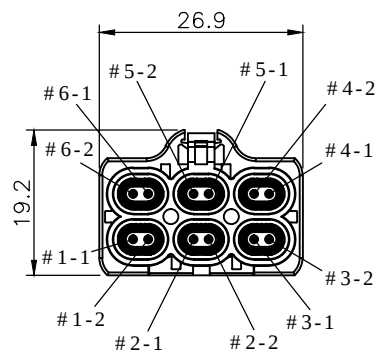

Conn.1

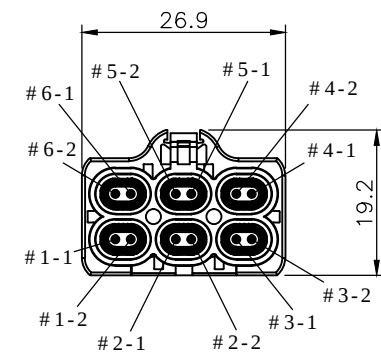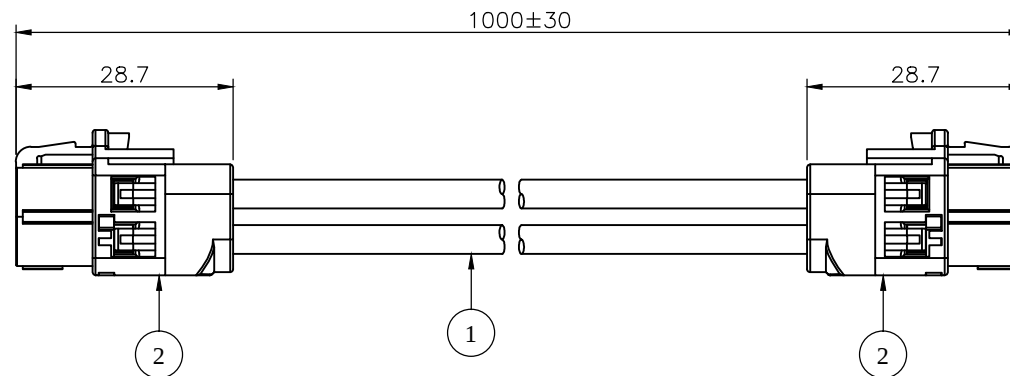

Conn.2

#### PIN ASSIGNMENT

| Conn.1 |       | Conn.2 |
|--------|-------|--------|
| 1-1    | _____ | 1-1    |
| 1-2    | _____ | 1-2    |
| 2-1    | _____ | 2-1    |
| 2-2    | _____ | 2-2    |
| 3-1    | _____ | 3-1    |
| 3-2    | _____ | 3-2    |
| 4-1    | _____ | 4-1    |
| 4-2    | _____ | 4-2    |
| 5-1    | _____ | 5-1    |
| 5-2    | _____ | 5-2    |
| 6-1    | _____ | 6-1    |
| 6-2    | _____ | 6-2    |
| Shield | _____ | Shield |

|                                                                                       |                                          |                                                                                                                                            |                                                                        |                      |
|---------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|----------------------|
| 2                                                                                     | 2PCS                                     | CONN., HS-MTP Straight Jack(2x3), Gold plated 30u"                                                                                         |                                                                        |                      |
| 1                                                                                     | 6PCS                                     | Coaxial Cable, 26AWGx2C+AB, OD3.8, Black                                                                                                   |                                                                        |                      |
| NO.                                                                                   | Q'ty                                     | DESCRIPTION                                                                                                                                |                                                                        |                      |
| UNLESS OTHERWISE SPECIFIED TOLERANCE                                                  |                                          | <div><b>ATTEND</b></div> <div>www.attend.com.tw</div> |                                                                        |                      |
| UNIT:                                                                                 | 1~10±1<br>11~30±2<br>31~50±3<br>51~200±5 |                                                                                                                                            |                                                                        | >401±10<br>ANGLE ±5° |
| m m                                                                                   |                                          |                                                                                                                                            |                                                                        |                      |
|                                                                                       |                                          |                                                                                                                                            |                                                                        |                      |
| DRAWN                                                                                 | Tim                                      | 2025/08/07                                                                                                                                 | DRAWN NAME:<br>HS-MTP Jack(2x3) to Jack(2x3) Cable<br>L=100 CM, Z CODE |                      |
| CHECKED                                                                               | Fros                                     | 2025/08/07                                                                                                                                 |                                                                        |                      |
| APPROVED                                                                              | Allen                                    | 2025/08/07                                                                                                                                 | CUSTOMER NO.                                                           |                      |
|  | SCALE<br>0.8                             | SHEET<br>1/1                                                                                                                               | SIZE<br>A4                                                             |                      |
| PRODUCT NO.                                                                           |                                          | MTP-1J1J-100Z05                                                                                                                            |                                                                        |                      |