


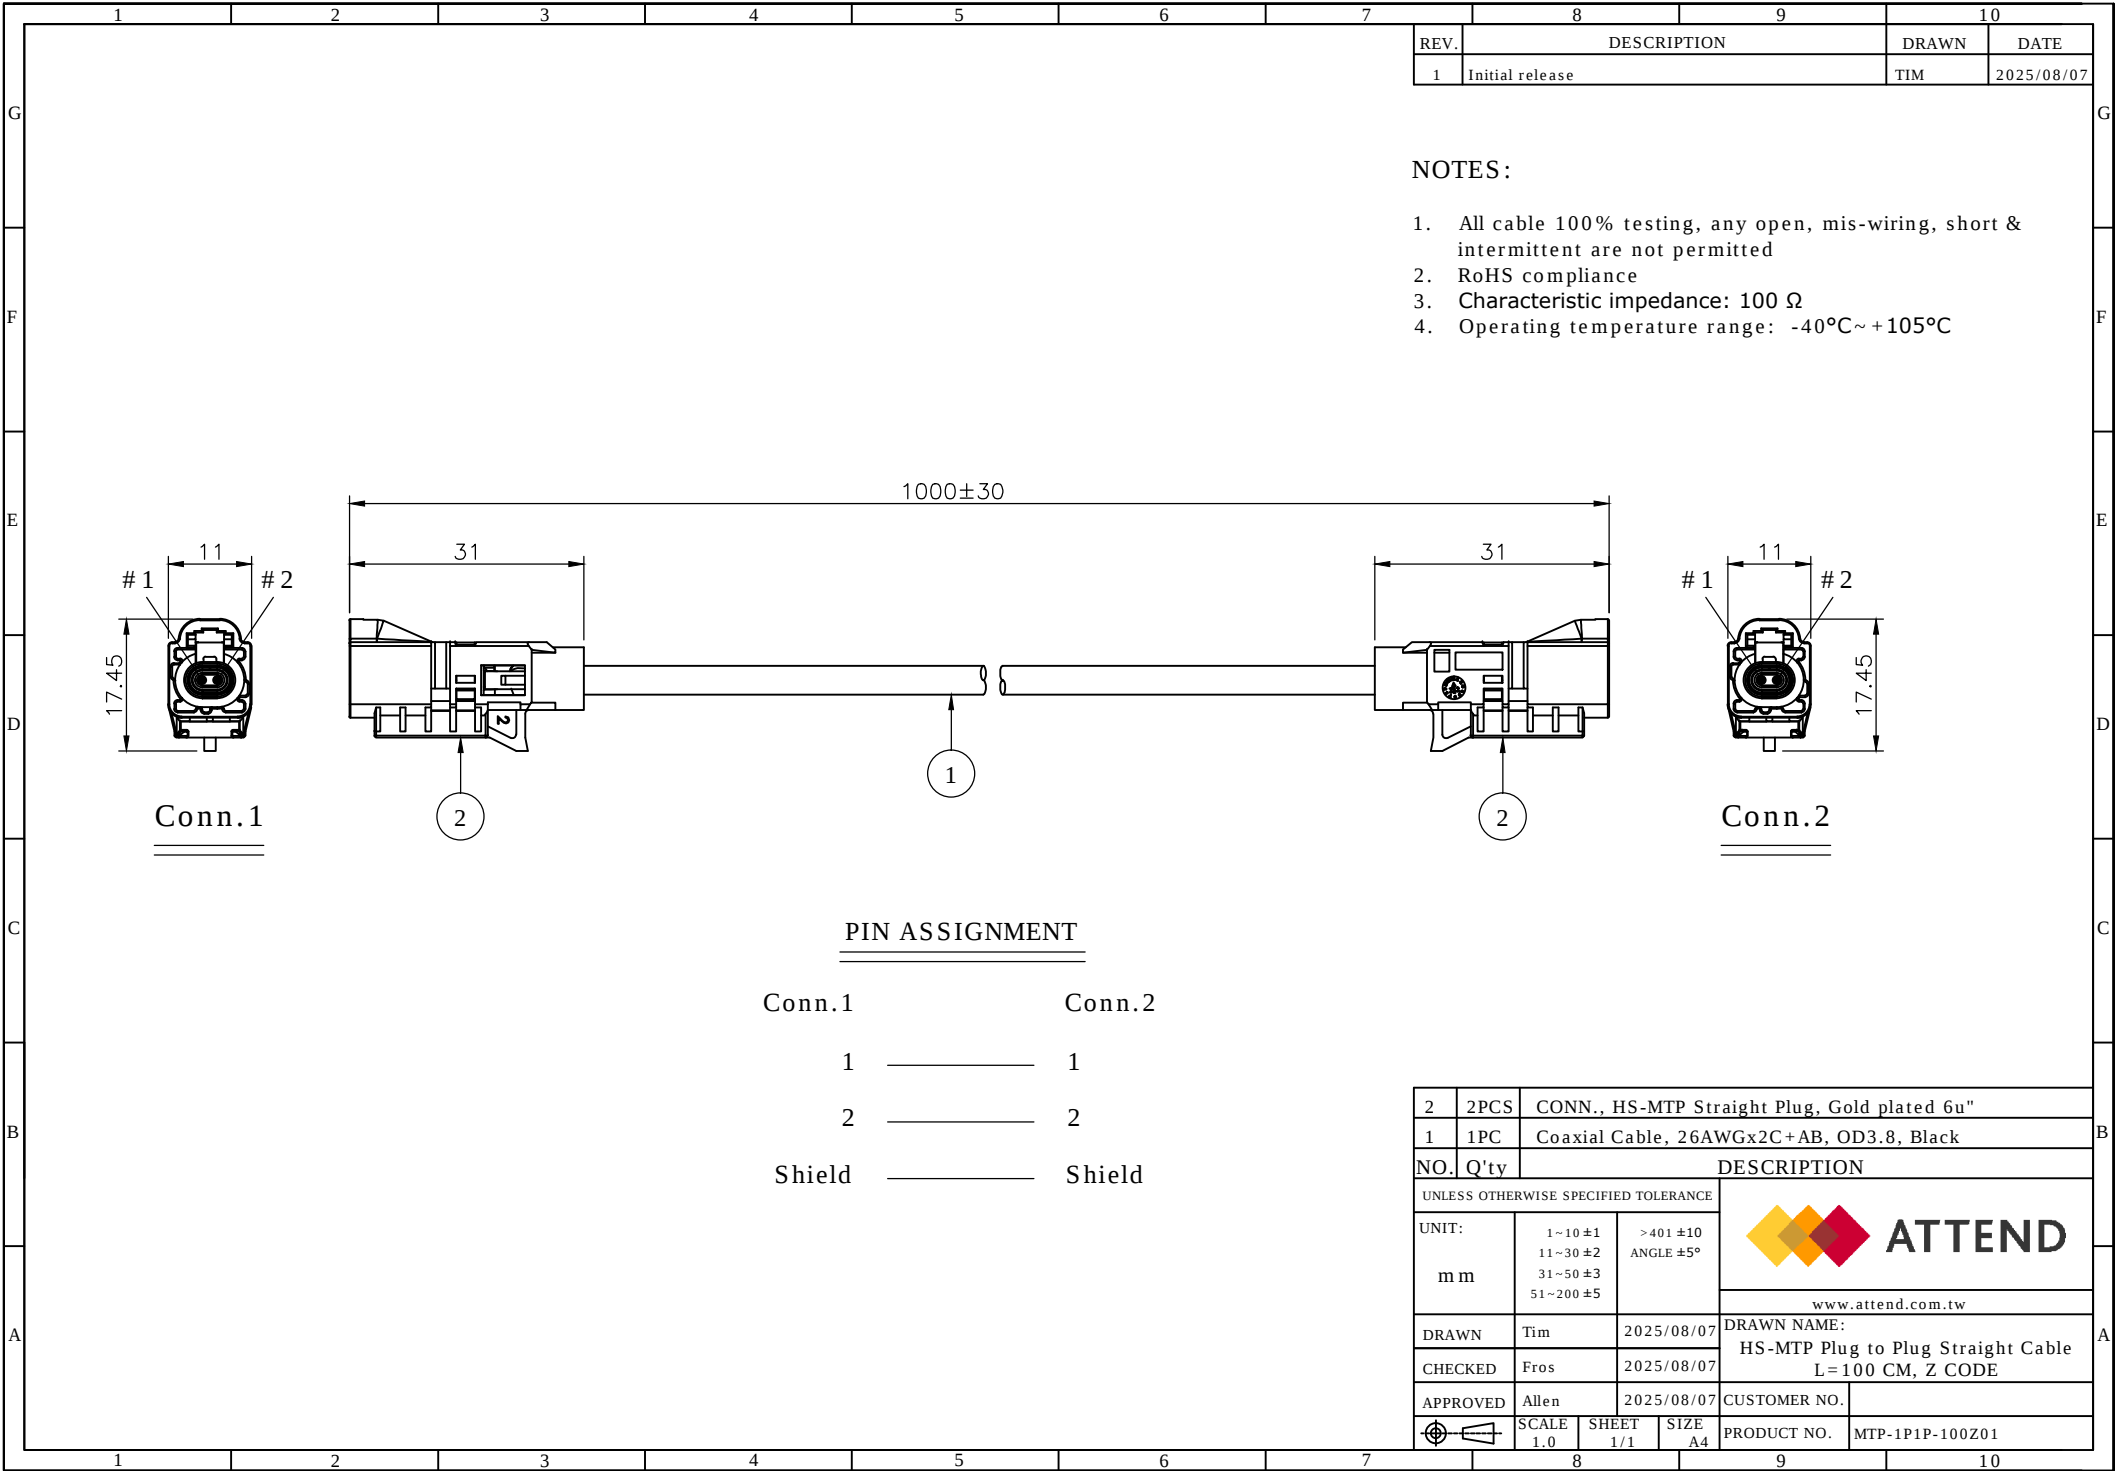

REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/08/07

- NOTES:
1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
 2. RoHS compliance
 3. Characteristic impedance: 100 Ω
 4. Operating temperature range: -40°C~+105°C