


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/04/25

NOTES:

- 1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
- 2. RoHS compliance

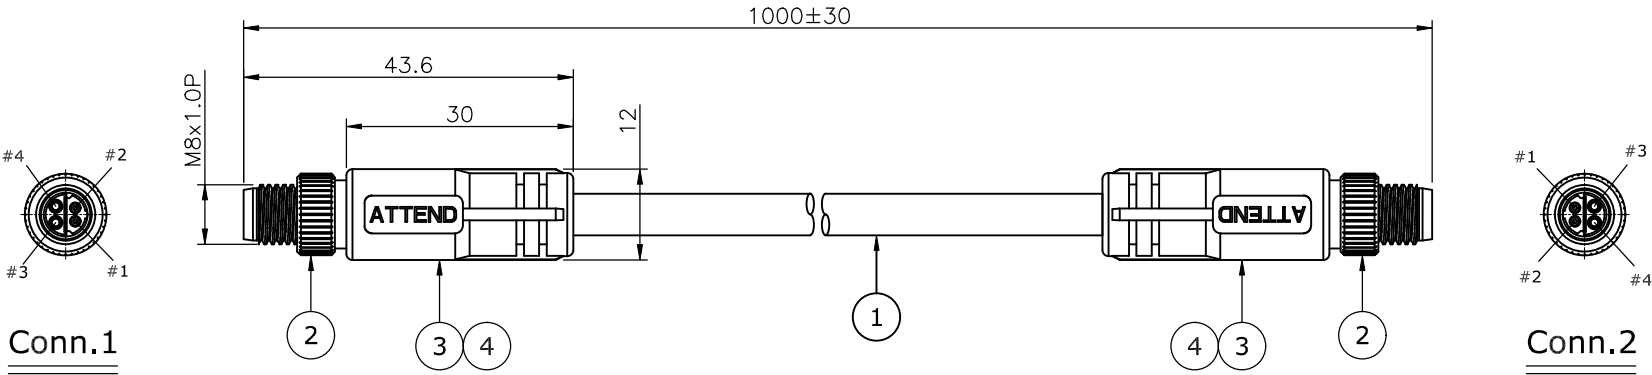

PIN ASSIGNMENT			
Conn.1		Conn.2	
1	Blue	1	
2	White	2	
3	Red	3	
4	Black	4	
SHELL	Drain	SHELL	

4	xg	Over Mold, TPU 50P, Black, T/N:HY-HX-0310		
3	xg	Inner Mold, PE, T/N:HY-HX-0309		
2	2PCS	CONN., SPE M8 4Pin Male, P/N: 229B-04MS01		
1	1PC	Cable, 26AWG*2C+AS+18AWG*2C, TPU Green		
NO. Q'ty		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:		1~10 ±1	 ATTEND	
mm		11~30 ±2		
		31~50 ±3		
		51~200 ±5		
		www.attend.com.tw		
DRAWN	Tim	2025/04/25	DRAWN NAME: M8 SPE Hybrid Male to Male CABLE L=1M	
CHECKED	Allen	2025/04/25		
APPROVED	Ken	2025/04/25	CUSTOMER NO.	
	SCALE	SHEET	SIZE	PRODUCT NO. SPE-1P1P-10001
	N/A	1/1	A4	