




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2020/10/22

Conn.1




CONDUCTOR:
(41/0.08UEW+250D)*2C



JACKET: black TPE OD:2.8mm

PIN ASSIGNMENT

Conn.1	Conn.2
1	1 VCC
2	
3	
4	2 GND

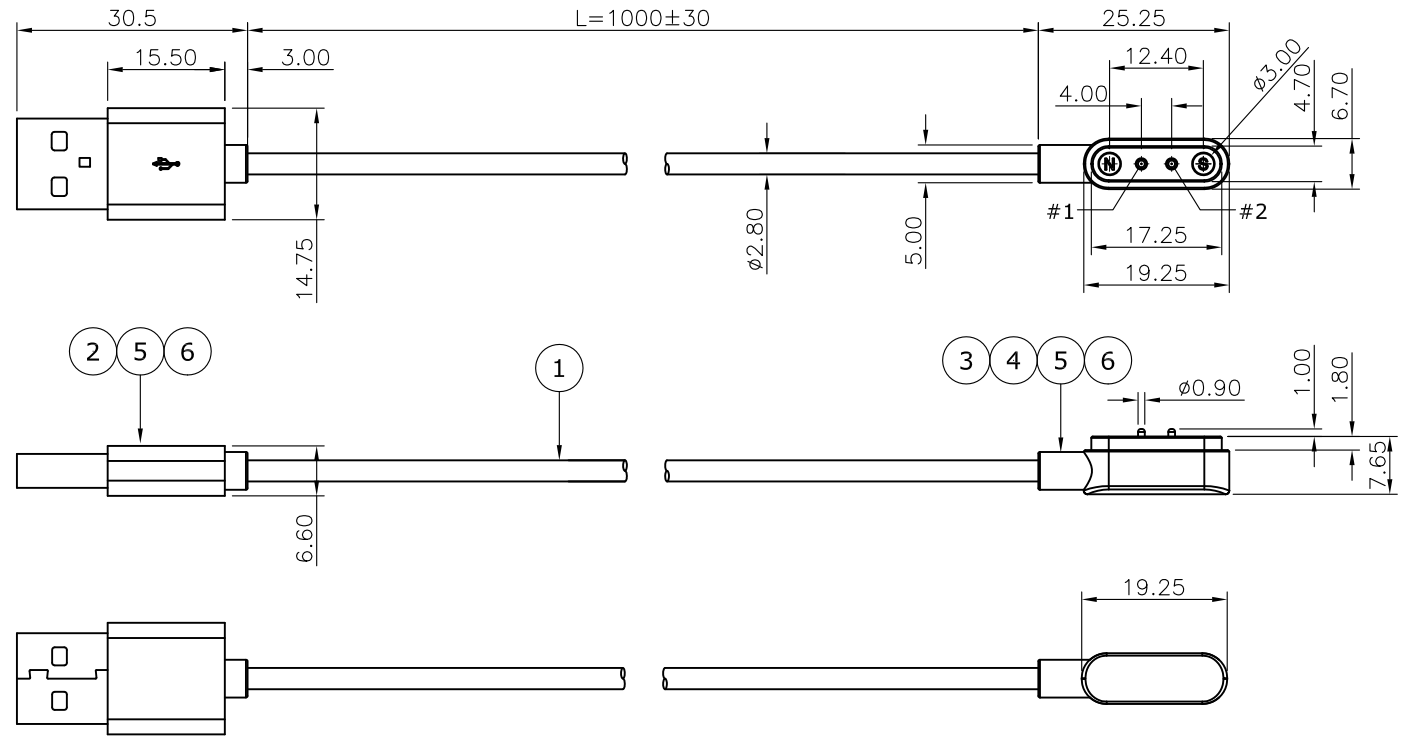


Conn.2

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance
3. CONN.2 pogo pin, contact force 60gf max. at 1mm stroke, durability 10,000 cycles min. , magnetic force 4.5N±1N
4. Operating temperature: -30°C to +85°C
5. Rating: 5 Volts/ 2 Amp

6		Over mold, TPE 90A black
5		Inner mold, LD-PE transparent
4	1PC	PCB, 2Layer FR4, 16.1*4.4*0.6t
3	1PC	Conn.2: Pogo Pin, 2P with N52 Magnet, 3u", PA46, black
2	1PC	Conn.1: USB A male, white
1	1PC	Cable, #24(41/0.08UEW+250D)*2C, TPE black, OD:2.8
NO.	Q'ty	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	1~10 ±1	>401 ±10	 www.attend.com.tw
mm	11~30 ±2	ANGLE ±5°	
	31~50 ±3		
	51~200 ±5		
DRAWN	Fros	2020/05/27	DRAWN NAME: USB 2.0 A to Pogo magnet, L=1M, black
CHECKED	Novia	2020/05/27	
APPROVED	Ken	2020/05/27	CUSTOMER NO.
SCALE	1/1	SHEET	1/1
		SIZE	A4
		PRODUCT NO.	US-4P2P-2022008-01