


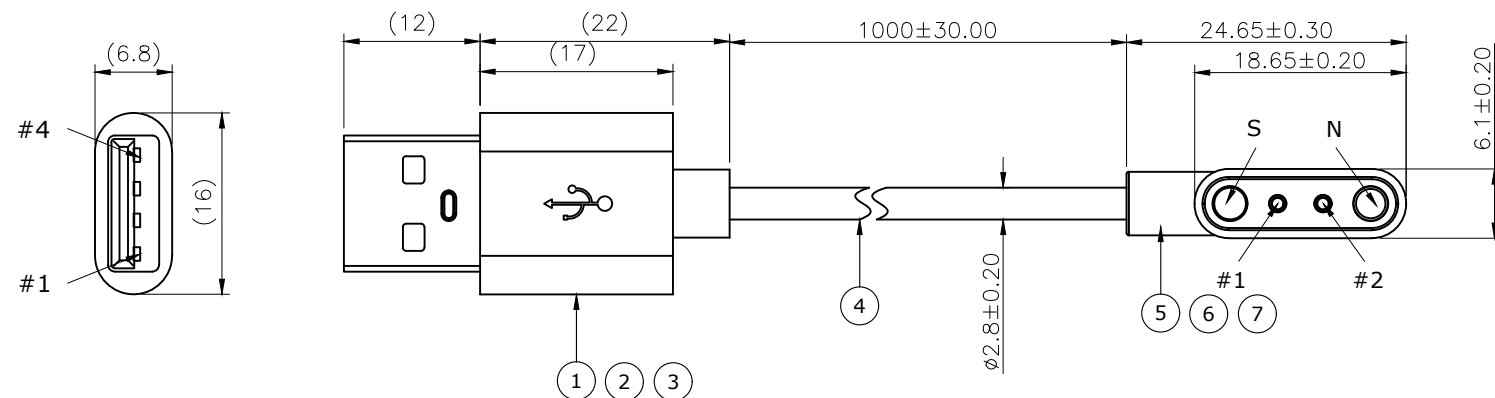

USB	→ Wire	→ Connector
1	→ Red	→ #1
4	→ Black	→ #2

NOTE :

Pogo pin Mechanical

1. Spring force: 60±20g at 1.10mm working stroke (per pin)
2. Life test: 20,000 cycles
3. Pogo pin Electrical: Rated voltage & current: 24V , 3A per pin.
4. Single pin contact resistance: 50 milliohm Max.
5. When the current is more than 1A ,then need to add a delay circuit(3 second)
6. 100% open & short test.

Environment performance

.Operating Temp:-30 to +60℃

All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted

RoHS compliance

7	1PC	Black Jacket TPE 95A		
6	1PC	Lucency PE		
5	1PC	Magnet Connector(Black PA9T+Magnet N52 NdFeB		
		Ni plating+PCB+Pogo pin(Plating 10u" Au)		
4	1PC	NO UL 43/0.08UEW*4C+250D OD3.2 TPE		
		70A black 1040mm		
3	1PC	Black Jacket TPE 80A		
2	1PC	Lucency PE		
1	1PC	USB/AM black		
NO. Q'ty		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT: mm	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°		
	 ATTEND www.attend.com.tw			
DRAWN	Michael	2025/05/21	DRAWN NAME: USB A to Pogo pin Cable, 2 pin black L=1M	
CHECKED	Fros	2025/05/21		
APPROVED	Ken	2025/05/21	CUSTOMER NO.	US-AP2P-10001
	SCALE 1 5/1	SHEET 1/1	SIZE A4	PRODUCT NO. US-AP2P-10001_B_1