



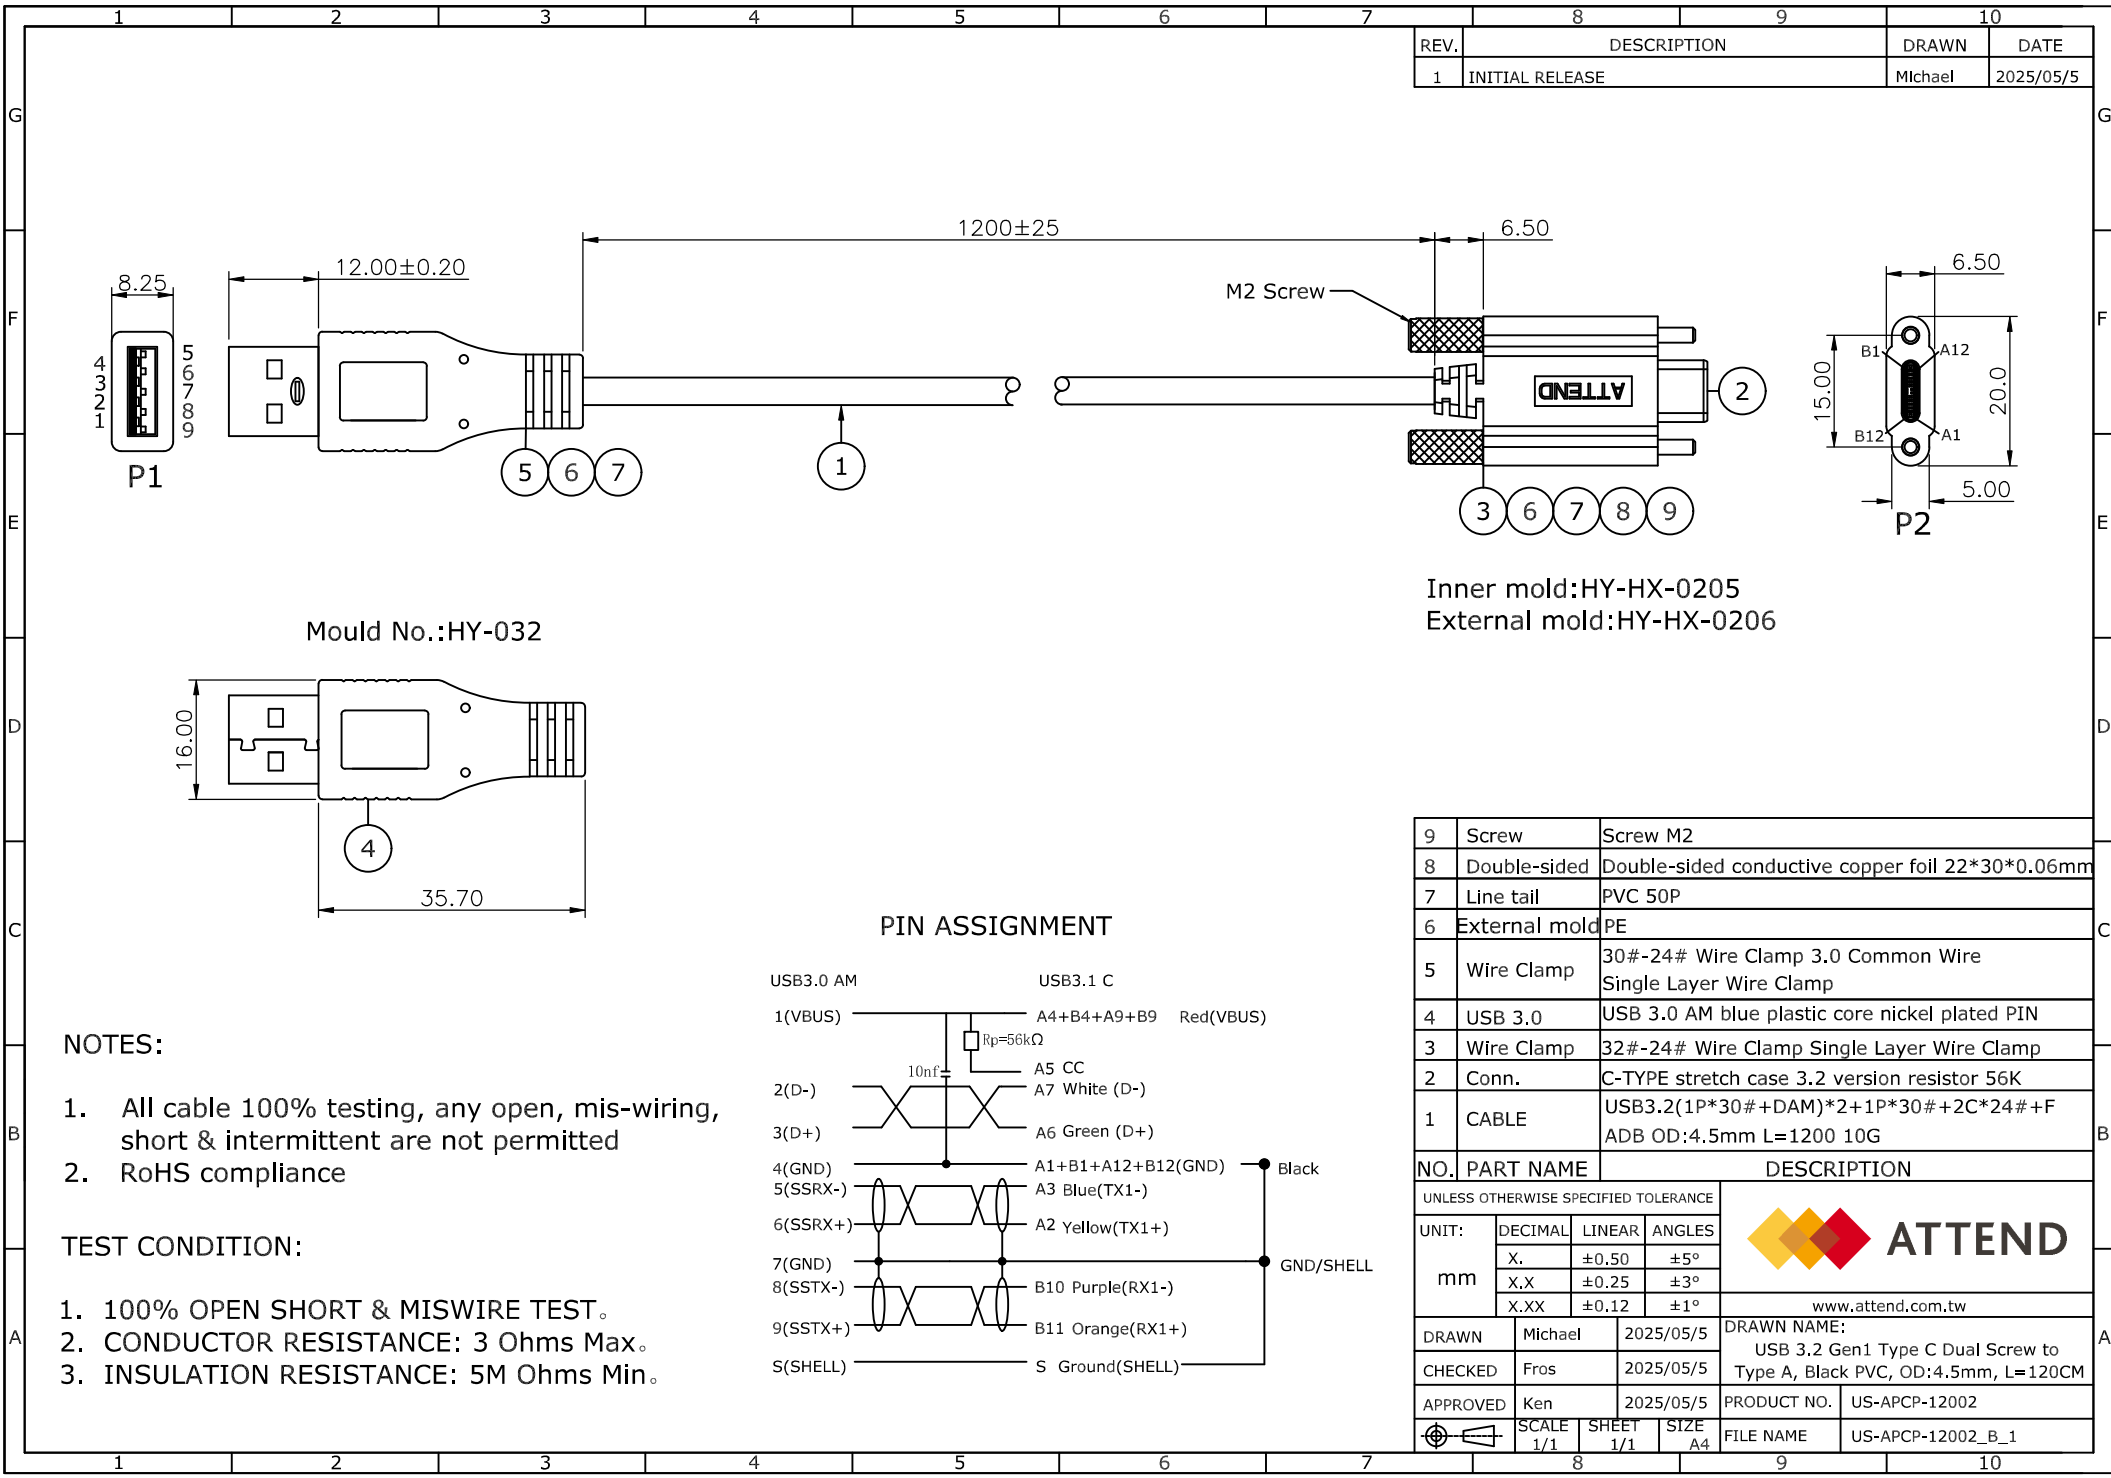

Inner mold:HY-HX-0205  
External mold:HY-HX-0206

PIN ASSIGNMENT

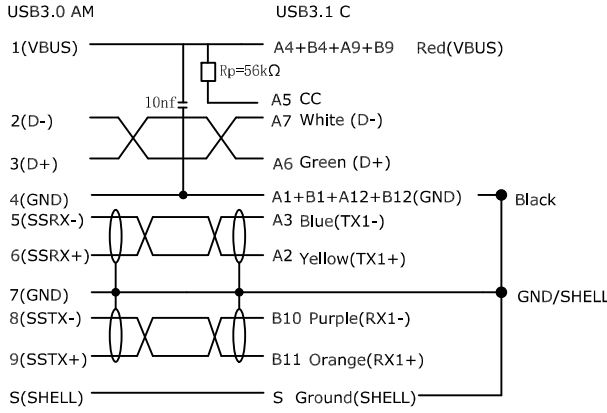

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

TEST CONDITION:

1. 100% OPEN SHORT & MISWIRE TEST.
2. CONDUCTOR RESISTANCE: 3 Ohms Max.
3. INSULATION RESISTANCE: 5M Ohms Min.

|   |               |                                                              |
|---|---------------|--------------------------------------------------------------|
| 9 | Screw         | Screw M2                                                     |
| 8 | Double-sided  | Double-sided conductive copper foil 22*30*0.06mm             |
| 7 | Line tail     | PVC 50P                                                      |
| 6 | External mold | PE                                                           |
| 5 | Wire Clamp    | 30#-24# Wire Clamp 3.0 Common Wire Single Layer Wire Clamp   |
| 4 | USB 3.0       | USB 3.0 AM blue plastic core nickel plated PIN               |
| 3 | Wire Clamp    | 32#-24# Wire Clamp Single Layer Wire Clamp                   |
| 2 | Conn.         | C-TYPE stretch case 3.2 version resistor 56K                 |
| 1 | CABLE         | USB3.2(1P*30#+DAM)*2+1P*30#+2C*24#+F ADB OD:4.5mm L=1200 10G |

| NO.                                  | PART NAME | DESCRIPTION |
|--------------------------------------|-----------|-------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCE |           |             |
| UNIT:                                | DECIMAL   | LINEAR      |
|                                      | mm        | mm          |
|                                      | X.        | ±0.50       |
|                                      | X.X       | ±0.25       |
| mm                                   | X.XX      | ±0.12       |
|                                      |           | ±1°         |
| www.attend.com.tw                    |           |             |
| DRAWN                                | Michael   | 2025/05/5   |
| CHECKED                              | Fros      | 2025/05/5   |
| APPROVED                             | Ken       | 2025/05/5   |
| SCALE                                | 1/1       | SHEET 1/1   |
| SIZE                                 | A4        | FILE NAME   |
| US-APCP-12002_B_1                    |           |             |



www.attend.com.tw

DRAWN NAME:  
USB 3.2 Gen1 Type C Dual Screw to  
Type A, Black PVC, OD:4.5mm, L=120CM

PRODUCT NO. US-APCP-12002

FILE NAME US-APCP-12002\_B\_1