

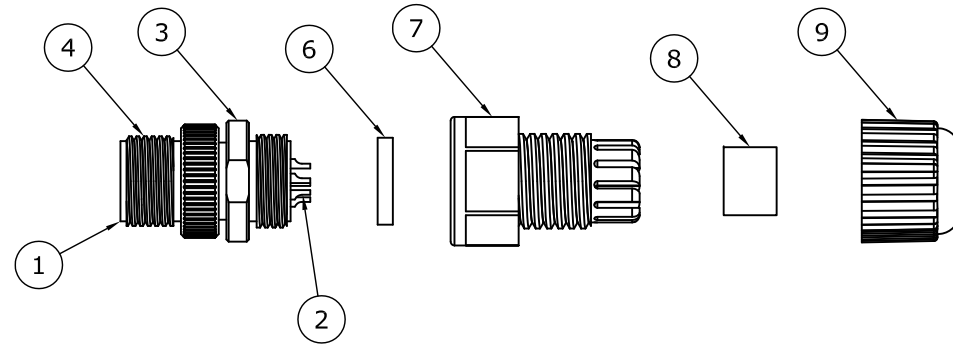




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2023/10/23

SPECIFICATION:

1. Current Rating: 2A
2. Voltage Rating: 30V
3. Waterproof: IPX7 or IP67
4. Operating temperature range: -40°C~+85°C



Recommend cable OD=5.0~6.8mm

9	SEALING NUT	PA66
8	SEAL	Silicone, gray
7	CLAMP RING	PA66
6	GASKET	Silicone, gray
5	EPOXY	black
4	NUT	Aluminum alloy, sating nickel plated
3	SHELL	Brass, nickel plated
2	CONTACT	Brass, gold flash plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN		Fros	2023/10/23
CHECKED		Tim	2023/10/23
APPROVED		Ken	2023/10/23
SCALE		1/1	SHEET 1/1
SIZE		A4	
DRAWN NAME:		M12 A- Code Plug for Cable, 8 Pin Male For Field Installable, Plastic, G/F	
PRODUCT NO.		216A-08MF1	
FILE NAME		216A-08MF1_B_1	



www.attend.com.tw