


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2016/02/22
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

Specification:

1. Current Rating: 0.5A
2. Voltage Rating: 50 V AC / 60 V DC
3. Water Proof: IPX7
4. Operation Temperature: -40°C to +85°C

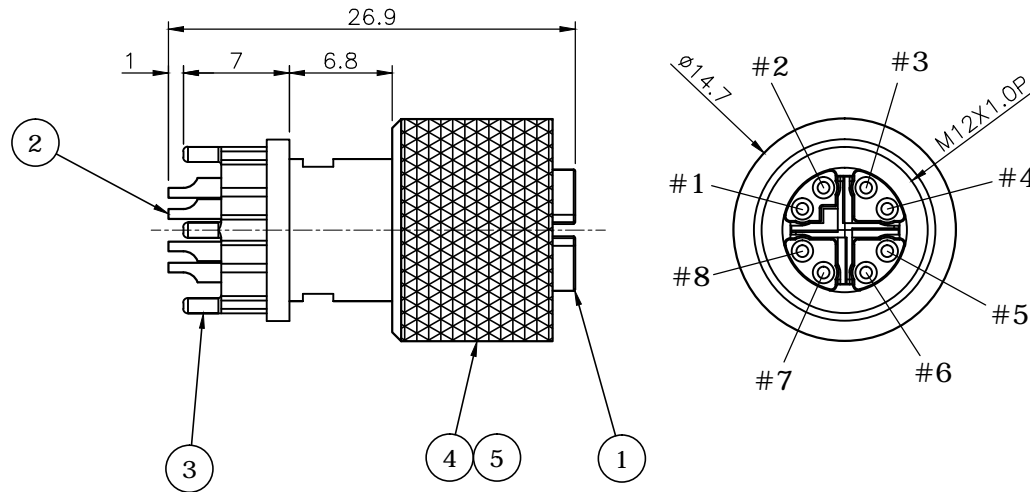

5	O-Ring	EPDM
4	Nut	Brass, Nickel Plating
3	X-Shell	Zn alloy, Nickel Plating
2	Contact	Brass, 10u" Gold under Nickel Plating
1	Housing	PA66, UL94V-0, Black
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN	Fros	2016/02/22	DRAWN NAME:	M12 X- Code Plug
CHECKED	Amy	2016/02/22		8Pin Female for Cable Overmold Type
APPROVED	Ken	2016/02/22	PRODUCT NO.	216X-08FO0
	SCALE	SHEET	SIZE	FILE NAME
	2/1	1/1	A4	216X-08FO0_B_2