



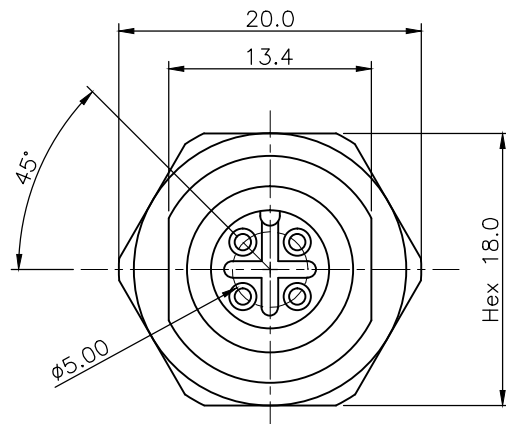
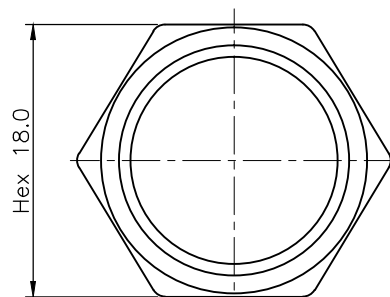


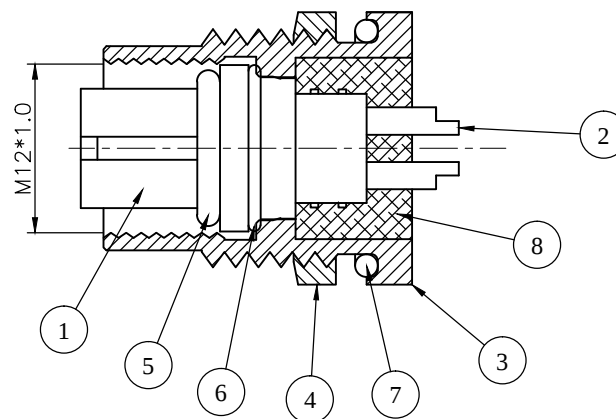

CUT OUT

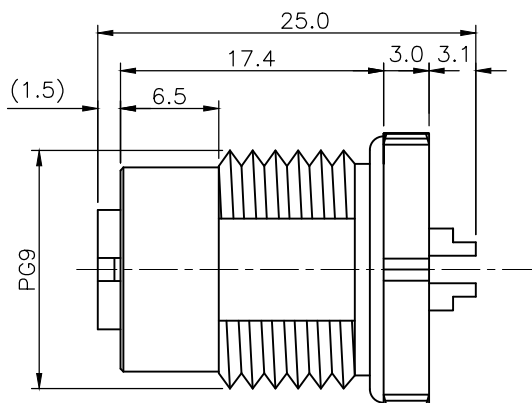

NUT

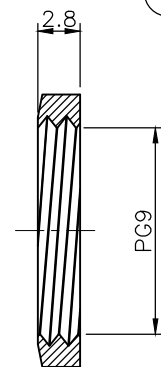

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2017/06/30
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C


8	EPOXY	EF400A & EF400B, Black
7	O-RING	EPDM
6	O-RING	EPDM
5	O-RING	EPDM
4	NUT	Brass, Nickel plating
3	SHELL	Brass, Nickel plating
2	CONTACT	Brass, 10u" Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
m m				WWW.ATTEND.COM.TW	
DRAWN		Fros	2017/06/30	DRAWN NAME: M12 A- Code Receptacle, 4Pin Female Straight Solder Type Front Fastened	
CHECKED		Tim	2017/06/30		
APPROVED		Ken	2017/06/30	PRODUCT NO. 216A-04FAF	
		SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 216A-04FAF_B_2




WWW.ATTEND.COM.TW


1. Wire Processing

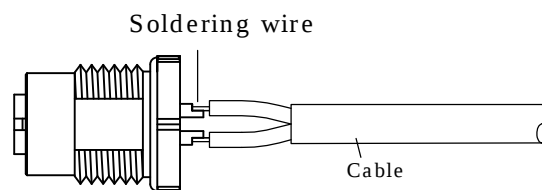

2. Installation Direction

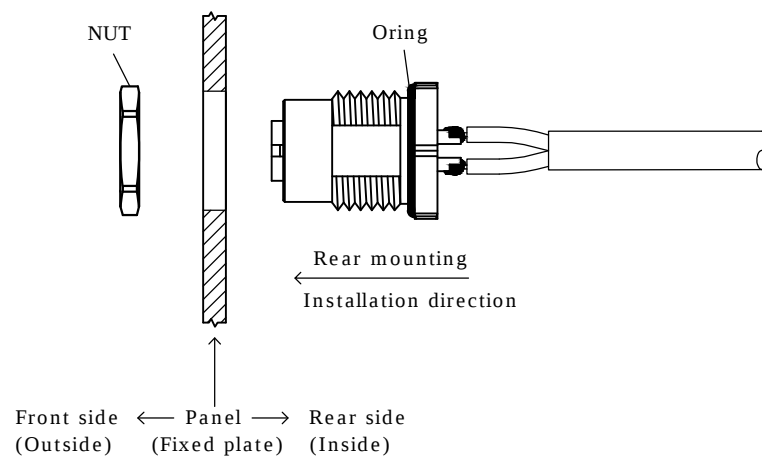

3. Connector Mated to Panel Mount

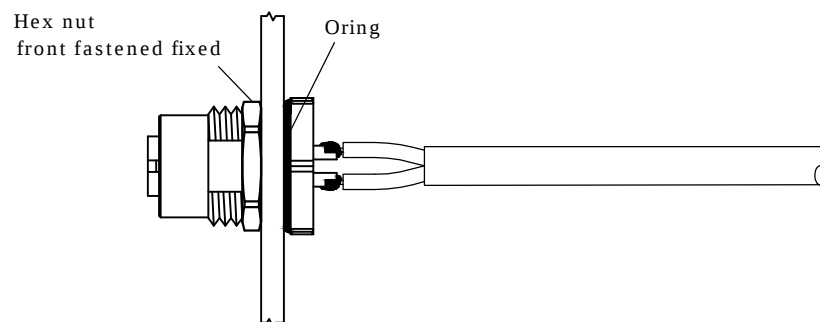

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Female Solder Type Front Fastener Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FAF_DG