


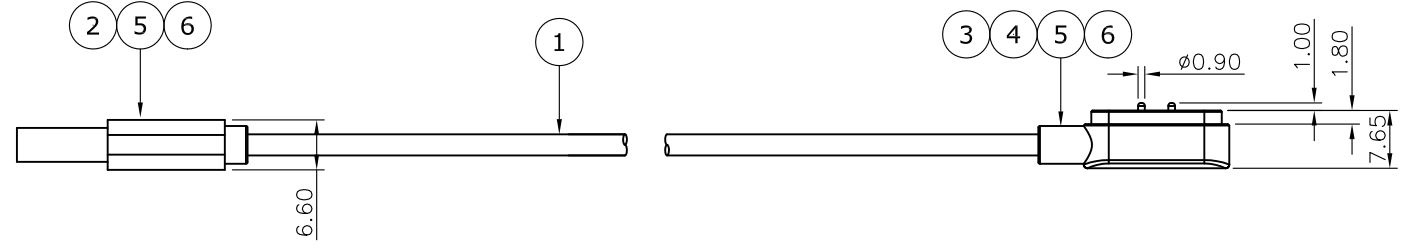


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2020/05/27


Conn.1



Conn.2

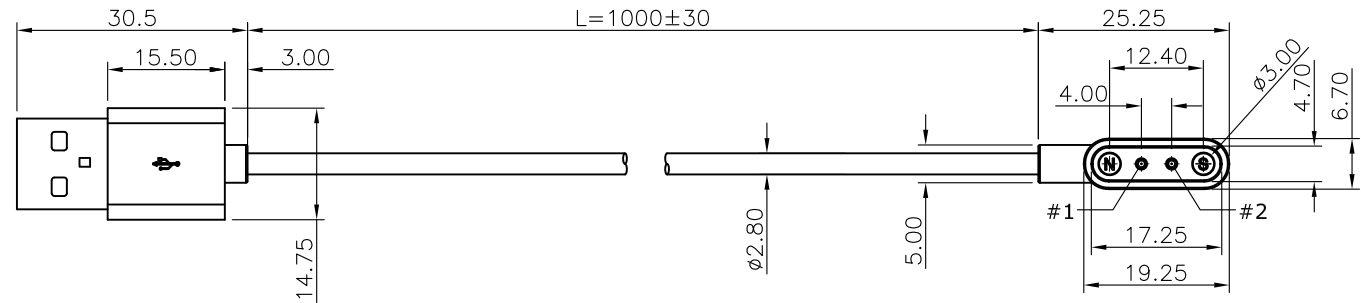

CONDUCTOR:
(41/0.08UEW+250D)*2C



JACKET: white TPE OD:2.8mm

NOTES:

- All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
- RoHS compliance
- CONN.2 pogo pin, contact force 60gf max. at 1mm stroke, durability 10,000 cycles min. , magnetic force 4.5N±1N
- Operating temperature: -30°C to +85°C
- Rating: 5 Volts/ 2 Amp

PIN ASSIGNMENT

Conn.1	Conn.2
1	1 VCC
2	
3	
4	2 GND

6		Over mold, TPE 90A white
5		Inner mold, LD-PE transparent
4	1PC	PCB, 2Layer FR4, 16.1*4.4*0.6t
3	1PC	Conn.2: Pogo Pin, 2P with N52 Magnet, 3u", PA46, white
2	1PC	Conn.1: USB A male, white
1	1PC	Cable, #24(41/0.08UEW+250D)*2C, TPE white, OD:2.8

NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°
mm		
www.attend.com.tw		
DRAWN	Fros	2020/05/27
CHECKED	Novia	2020/05/27
APPROVED	Ken	2020/05/27
DRAWN NAME:		USB 2.0 A to Pogo magnet, L=1M, white
CUSTOMER NO.		
SCALE	SHEET	SIZE
1/1	1/1	A4
PRODUCT NO.		US-4P2P-2022008

