

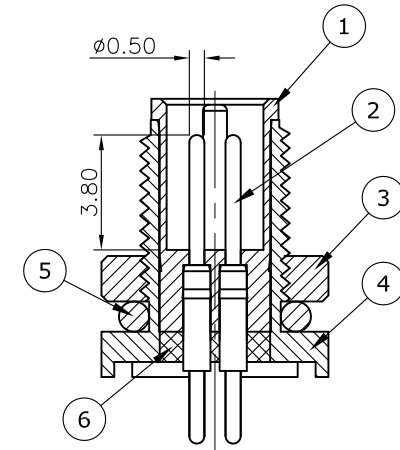
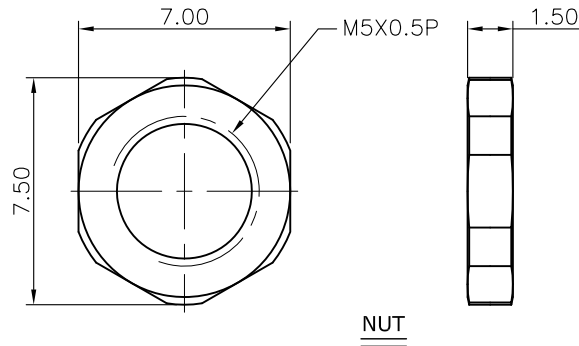



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2019/10/08

SPECIFICATION:

1. CURRENT RATING: 1A
2. VOLTAGE: 60V
3. WATER PROOF: IP67
4. OPERATION TEMPERATURE: -20°C TO +85°C

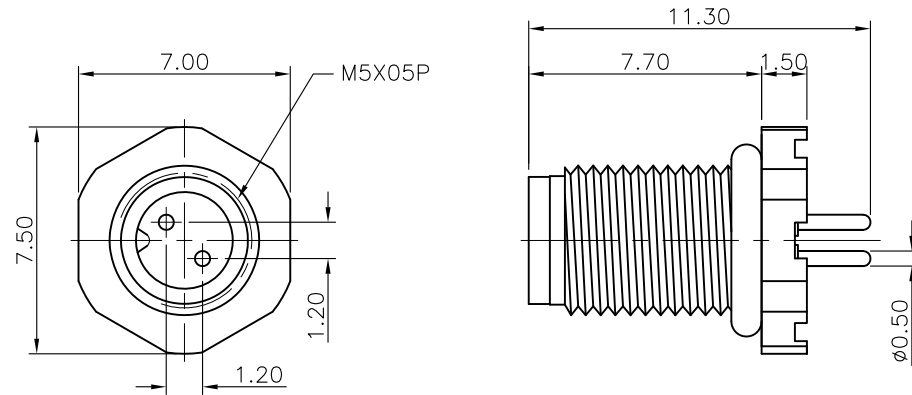

RECOMMEND PANEL CUT OUT

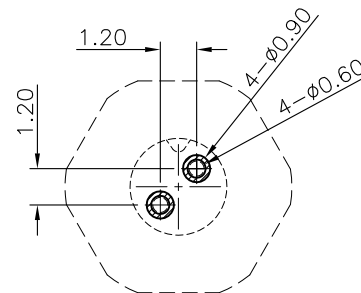


RECOMMEND PCB LAYOUT


6	EPOXY BASE	EF400A & EF400B, BLACK		
5	O-RING	NBR, BLACK		
4	SHELL	BRASS, NICKEL PLATED		
3	NUT	BRASS, NICKEL PLATED		
2	CONTACT	BRASS, GOLD PLATED UNDER NICKEL		
1	HOUSING	PBT, UL94V-0, BLACK		
NO	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:	DECIMAL	LINEAR	ANGLES	
mm	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
			 ATTEND	
			WWW.ATTEND.COM.TW	
DRAWN	Tim	2019/10/08	DRAWN NAME: M5 A-Code Receptacle, 2Pin Male Straight PCB Type, Front Fastened	
CHECKED	Fros	2019/10/08		
APPROVED	Ken	2019/10/08		
		PRODUCT NO.	220A-02MSF	
	SCALE 4/1	SHEET 1/1	SIZE A4	FILE NAME 220A-02MSF_B_1




1. Soldering Board



2. Installation Direction

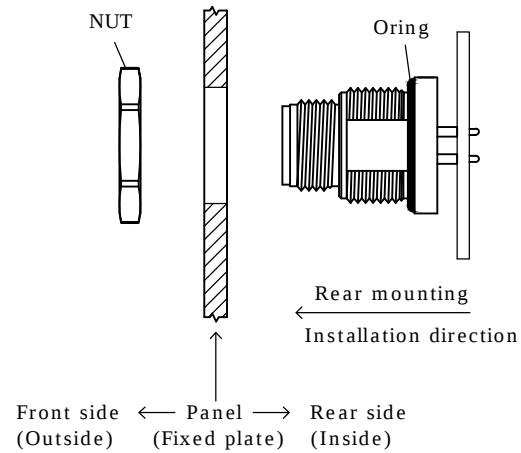

3. Connector Mated to Panel Mount

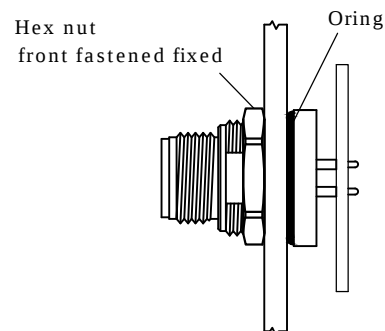

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME: M Series For Male DIP Type Front Fastened Design Guide			
CHECKED	Fros	2025/02/25				
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MSF_DG	